


# URLW

## UNIVERSAL STRIP RETROFIT KIT W/REFLECTOR

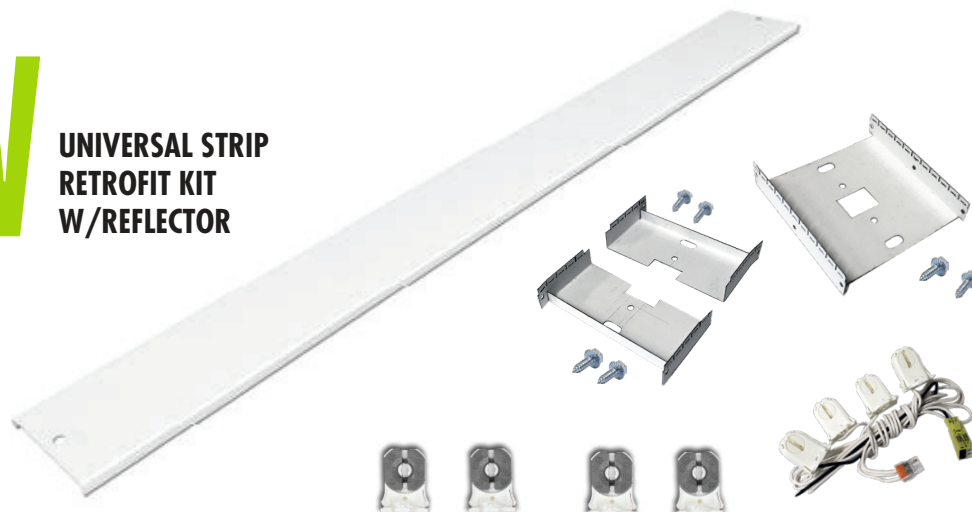

Our **URLW** is designed to convert 4' or 8' T8 strip fixtures to more efficient T8, T5 or LED technology. Choose between retrofitting with a reflector for enhanced performance or simply a ballast cover. Both kits utilize a Universal Socket Brackets engineered to fit most fluorescent channels from 4" to 5.25" in width. The Reflector/Ballast Cover mounts to socket brackets with screws (or optional quarter-turn fasteners) for easy maintenance after retrofit is complete. The Universal Socket Bracket ships flat and easily folds to fit channels and requires only simple hand tools. We recommend utilizing the efficient LED T8 lamps that provide high lumen output with efficient energy savings. Since they don't require any ballast or driver the only component that will ever need changing is the LED T8 lamp. This kit provides the flexibility to change wattage, lumens, and color temperature simply by changing the lamps.

**APPLICATIONS:** The URLW retro kit designed for quick installation into a wide variety of existing lighting fixtures, including those found in retail and commercial facilities.

**DIMMING OPTIONS:** The 4 FT lamps are available with two dimming options; Specially designed dimming lamps require an external driver that runs 1 or 2 lamps. More than 2 lamps require multiple external drivers or Consult for Bypass Type B lamps that can be dimmed without any external driver and dim with standard 2 wire dimming.

**REFLECTORS:** Precision formed, high performance, premium reflector or enhanced white reflector

**MOUNTING:** The URLW universal strip retrofit kit mounts easily, requiring only simple hand tools.

**LISTINGS:** ETL and cETL Listed. Damp location rated.

**WARRANTY:** 5-Year Limited Warranty. Complete warranty and terms located at [www.aelnow.com/warranty](http://www.aelnow.com/warranty).

Ordering Information on Next Page ►



## ORDERING INFORMATION. Example: URLW-2-32-12EBLT-5

| SERIES | LAMPS | LAMPS REPLACEMENT | OPTIONS                          | BELLY PAN WIDTH |
|--------|-------|-------------------|----------------------------------|-----------------|
| URLW   | 1     | 32 32W T8         | 12EBLT 12 Watt Emergency Ballast | 4 4" Wide       |
| URLWT* | 2     |                   | SE Single End Feed               | 414 4.25" Wide  |
|        |       |                   | DE Double End Feed               | 5 5" Wide       |

\* Tandem, 8ft fixture

## BELLY PAN ONLY

| SERIES | WIDTH          | LENGTH                                         |
|--------|----------------|------------------------------------------------|
| URLWP  | 4 4" Wide      | 4 4' (One 4' pan)                              |
|        | 414 4.25" Wide | 8 8' (Two 4' pans with quarter turn fasteners) |
|        | 5 5" Wide      |                                                |



## HARDWARE ONLY

| SERIES | LENGTH |
|--------|--------|
| URLWH  | 4 4'   |
|        | 8 8'   |



4' kit



Typical 8' kit

**NOTE:** Sockets to be wired single or double ended per part number selected.  
Quantity of sockets determined by part number also.