




- o Available in LED, Incandescent & GU24
- o Ceiling Mount
- o Molded of Durable Non-Corrosive UV Resistant Resins with
- o UL Listed for Damp Locations

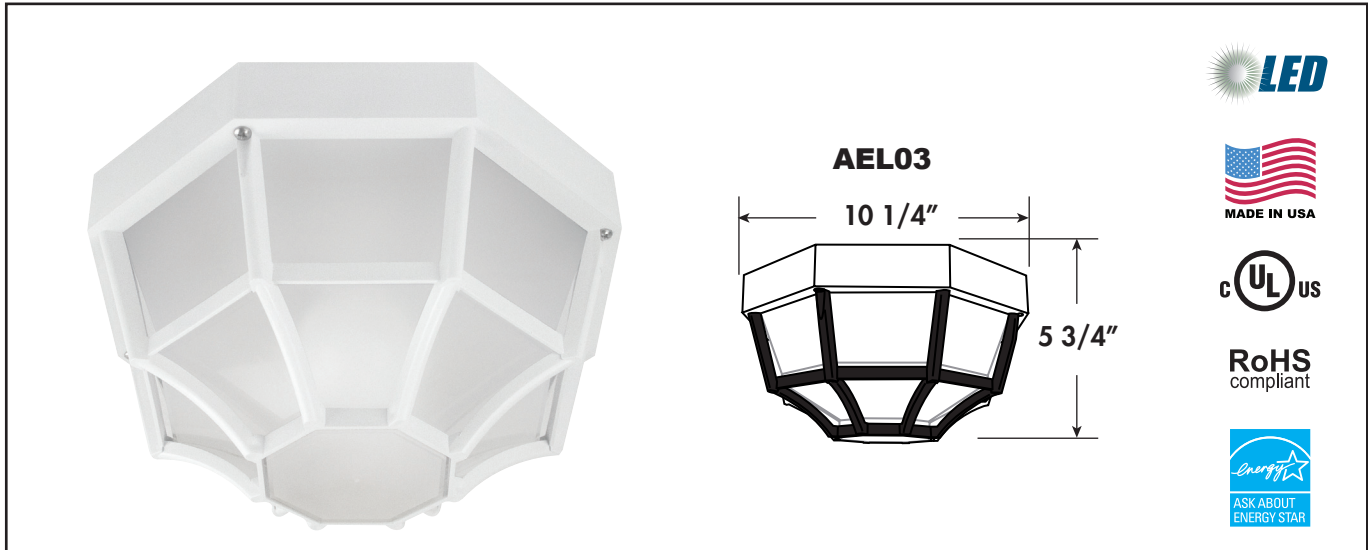

EXAMPLE # AEL03-G13-WFL

SERIES #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
AEL03	LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W -White B - Black	ACRYLIC F -Glare Free Frost	N/A
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**	W -900lm 3000K C -1000lm 4000K		
	LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**	W -1350lm 3000K C -1400lm 4000K		
	LE1800 - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt**	W -1850lm 3000K C -1900lm 4000K		
	INCANDESCENT, MEDIUM BASE, 120V I75-1 X 75W Max	W -White B - Black	ACRYLIC F -Glare Free Frost	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE-A19/E26, 2700K LCE-A19/E26, 4000K
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G23-1 X 23W G26-1 X 26W or 27W	W -White B - Black	ACRYLIC F -Glare Free Frost	L-CFL, 2700K

*DATA PER LM79/LM80/TM21 & IES FILES AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE

AEL -- Advantage Environmental Lighting

Address: 917 West Mayfield, Suite 103
Arlington, TX 76015
Phone: 817-468-3591
Email: info@aelnow.com

Specifications are subject to change without notice.

Catalog #	
Project	
Date	
Type	