


WALL MOUNT
CEILING MOUNT
PENDANT MOUNT

XPEX

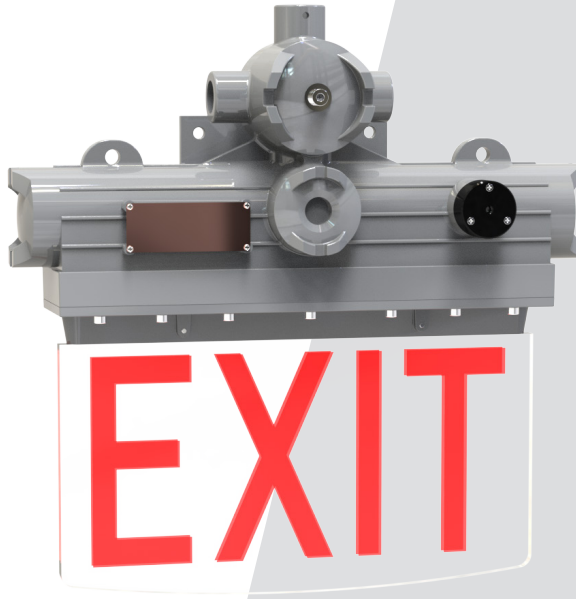

**EXPLOSION
PROOF EDGE LIT
LED EXIT SIGN**

- 3-hour emergency operation
- Alternate exit legend and languages available
- Provided with 3/4" NPT or M25 conduit hubs
- Low energy consumption
- Long lifespan up to 50,000 hours
- Edge-lit sign
- Ingress protection rating IP66
- No additional equipment required for wall mounting



The XPEX Series LED exit sign features an edge lit design. A one-piece silicon gasket is provided. Exit sign plate is high quality tempered glass.

CONSTRUCTION: A356T6 aluminum with baked-on gray epoxy finish with Stainless steel hardware.

OPERATING TEMPS: 14°F to +140°F (-10°C to +60°C)

ELECTRICAL: Universal Input Voltage, 100-277VAC or 100-347VAC, 50/60Hz. Rated Wattage: 1W, 2W, 3W, 4W, 5W

LISTINGS: UL924 Class I, Division 1, Groups B, C, D Class I, Division 2, Groups A, B, C, D Marking UL844 (North American) Class II, Division 1, Groups E, F, G Class II, Division 2, Groups F, G Class III UL844 CSA C22.2 No.137-18 UL 121201/CSA NO.213.




WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

Ordering info on Next Page ►




ORDERING INFORMATION:

Example: XPEX-TQ-CM

SERIES	HUBS	OPTIONS	Wall Mounting:	Pendant Mounting:	Pendant Mounting:
XPEX	TQ 3/4" NPT M25 M25 conduit hubs	CM Ceiling Mounting Kit PMV Pendant Mounting, Vertical PMS Pendant Mounting, Sling EMB Emergency battery (90 minutes)		  Name: Straight Pipe Material: Iron  Name: Junction Box Material: Aircraft Aluminum A383	  Name: Mounting Sling Material: Stainless Steel S30400
SEE BELOW FOR EXAMPLES					

PACKING INFORMATION				
Model	Net Weight*	Gross Weight*	Quantity/ Carton	Pkg Dimensions (LxWxH)
XPEX	6.0 kg/13.23 lbs	14.0 kg/30.86 lbs	2 pcs	18.50x18.50x10.24inch/470x470x260mm

Dimension:

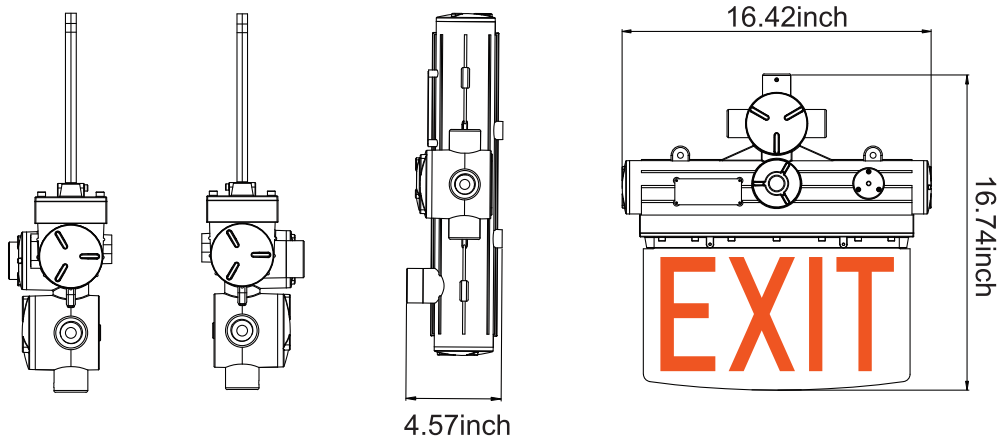

Explanation of Indicator Light:



Image: RGY three-color indicator light

- If three or two indicator lights remain on during initial power on, it is necessary to reset them by detecting the switch: press the switch "ON" for 5 to 6 seconds ->OFF ->ON.
- **RED:**
 1. Fast charging for 2 hours.
 2. Charging indicator, displaying 20% -80% battery capacity.
- **GREEN:**
 1. Trickle charging.
 2. Charging indicator, displaying 80% -100% battery capacity.
 3. Green light on when disconnecting the battery.
- **RED and GREEN:**

Red and Green flashes alternately for 5 minutes, indicating that it is at 80% battery capacity.
- **YELLOW:**
 1. Discharge below 20%.
 2. If the yellow light is on in any state, the product is out of order.

Description of Switch:

- 1. Press the switch "ON" once, the EXIT sign and indicator light will flash once, with an ON/OFF interval of 10 seconds.
- 2. With mains electricity disconnected, long press and hold the switch for 3 to 5 seconds to turn off the product. If the EXIT sign needs to be turned on again, it will be activated through mains electricity.
- 3. The product will automatically have monthly inspection. EXIT sign and indicator light will flash once every 30 or 31 days.
- 4. The product will automatically have an annual inspection. EXIT sign and indicator light will flash twice every year.




Image: Magnetic switch