


- Available in LED & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins with Aluminum Base
- Ceiling Mount
- UL Listed for Damp Locations

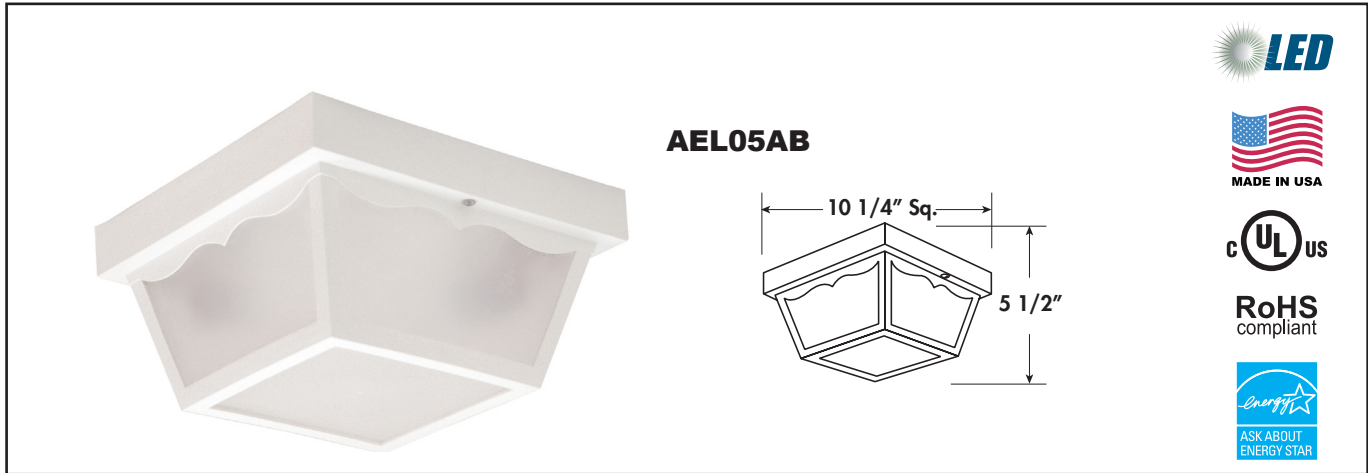

**EXAMPLE # AEL05AB-G13-BFPL**

SERIES#	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
<b>AEL05AB</b>	<b>LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40° TO C +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR</b>	<b>W</b> -White <b>B</b> - Black	<b>POLYPROPYLENE</b> <b>F</b> -Frosted <b>GLASS</b> <b>G</b> -Clear	<b>M</b> -Motion Sensor <b>P</b> -Photocell	
	<b>LE800</b> - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**				<b>W</b> -900lm 3000K <b>C</b> -1000lm 4000K
	<b>LE1200</b> - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				<b>W</b> -1350lm 3000K <b>C</b> -1400lm 4000K
	<b>LE1800</b> - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				<b>W</b> -1850lm 3000K <b>C</b> -1900lm 4000K
<b>AEL05AB</b>	<b>MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR</b>	<b>W</b> -White <b>B</b> - Black	<b>POLYPROPYLENE</b> <b>F</b> -Frosted <b>GLASS</b> <b>G</b> -Clear	<b>M</b> -Motion Sensor <b>P</b> -Photocell	
	<b>L1800</b> - 22W Power Input CRI 74 (TYP) >82 Lumens Per Watt**				<b>C</b> -1824lm 4000K
<b>AEL05AB</b>	<b>GU24 BASE, 120V</b> <b>G13</b> -1 X 13W <b>G213</b> - 2 X 13W <b>G18</b> -1 X 18W <b>G218</b> - 2 X 18W <b>G23</b> -1 X 23W <b>G223</b> -2 X 23W <b>G26</b> -1 X 26W or 27W	<b>W</b> -White <b>B</b> -Black	<b>POLYPROPYLENE</b> <b>F</b> -Frosted <b>GLASS</b> <b>G</b> -Clear	<b>P</b> - Photocell <b>L</b> -CFL, 2700K	

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE

**AEL -- Advantage Environmental Lighting**

Address: 917 West Mayfield, Suite 103  
Arlington, TX 76015  
Phone: 817-468-3591  
Email: info@aelnow.com

Specifications are subject to change without notice.

<b>Catalog #</b>	
<b>Project</b>	
<b>Date</b>	
<b>Type</b>	