



CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!




WARNING: Before beginning installation, disconnect electrical power at main switch or circuit breaker.

### **IMPORTANT SAFEGUARDS**

Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable. Installation and servicing of this equipment should be performed by qualified service personnel only. Do not mount near gas or electric heaters. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability. Do not use this equipment for other than intended use.

# **GENERAL INSTRUCTIONS**

### **ELECTRICAL CONNECTION**

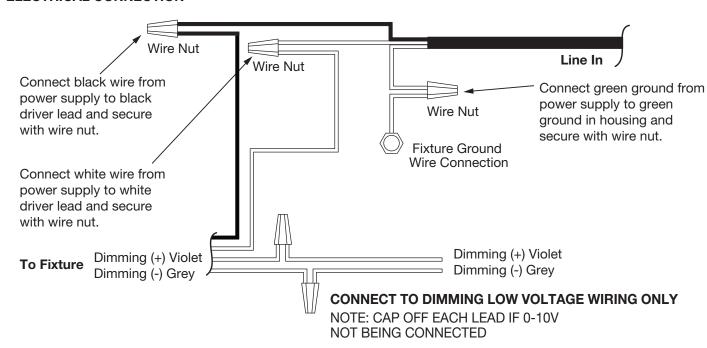

USE ONLY UL LISTED WIRING CONNECTORS AND UL LISTED WIRING HAVING A MINIMUM TEMPERATURE RATING AS SHOWN ON THE FIXTURE LABEL.





# **Surface Mounting**


 Secure luminaire base to mounting surface by inserting customer supplied #8 anchor screws, toggle bolts or suitable fasteners, (depending on structural conditions) into key hole slots on the top side of the luminaire base. (See Figure C)

## **Chain Mounting with V Hook**

- Attach customer supplied V-Hooks to each end of the luminaire base using designated key hole slots.
  (See Figure B)
- Attach customer supplied chain to the V-Hooks and mounting surface per applicable codes.

## **T-Bar Clip Mounting**

- Attach customer supplied T-Bar clips to the designated opening on the luminaire. (See Figure D)
- Bring luminaire into T-Bar ceiling grid and secure luminaire to grid per applicable codes.

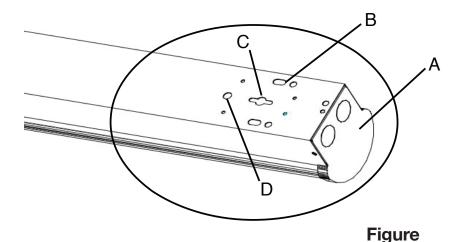

A: End Cap

**B:** Chain Mounting with V Hook

C: Surface Mounting

D: T-Bar Clip Mounting Hole