

BAT RECESSED LED PRISON GRADE



The **BAT** is an LED prison grade recessed wall mount. This durable, vandal proof fixture is the perfect solution for areas such as prison cells, holding cells, restrooms, behavioral health facilities, hallways, corridors, and anywhere that needs a prison grade recessed wall mount.

CONSTRUCTION: Various door materials available. If additional options are needed, please consult factory.

FASTENERS: Torx® Head with center pin security fasteners standard. Allenhead w/center pin security fasteners available with option "AH".

ELECTRICAL SYSTEM: Electronic driver 0-10V dimming standard. Long-life LED system rated for >100K hours (L70 @ 25°C). Complies with federal energy efficiency

OPTICAL SYSTEM: Lens per specification (see options) and secured with heavy duty lens retention system.

LISTINGS: ETL and cETL listed for damp locations.

MOUNTING: Recessed wall mount.

LED: 80 CRI or 90 CRI LEDs available in 3000K, 3500K, 4000K, 5000K, Red, Blue, and Amber.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at: www.aelnow.com/warranty


Ordering Information on Next Page ►

ORDERING INFORMATION:

Example: BAT-30-35-B18-B18-CP87-156P-M-90

SERIES	CCT	OUTPUT	HOUSING MATERIAL	DOOR TYPE
BAT	30 3000K	WHITE:	B14 14 Gauge Cold Roll Steel	B14 14 Gauge Cold Roll Steel
	35 3500K	35 35 Lumens (Standard)	B16 16 Gauge Cold Roll Steel	B16 16 Gauge Cold Roll Steel
	40 4000K	75 75 Lumens (Medium)	B18 18 Gauge Cold Roll Steel	B18 18 Gauge Cold Roll Steel
	50 5000K	100 100 Lumens (High)	B20 20 Gauge Cold Roll Steel	B20 20 Gauge Cold Roll Steel
R	Red LED	R/B/A:	SH14 14 Gauge Stainless Steel	SH14 14 Gauge Stainless Steel
B	Blue LED	30 30 Lumens (Standard)	SH16 16 Gauge Stainless Steel	SH16 16 Gauge Stainless Steel
A	Amber LED	64 64 Lumens (Medium)	SH18 18 Gauge Stainless Steel	SH18 18 Gauge Stainless Steel
		86 86 Lumens (High)		

INNER LENS	OUTER LENS	VOLTAGE	DRIVER
N No Lens	N No Lens	M 120/277V	AM Anti-Microbial Paint
125C .125 Clear Polycarbonate	125P .125 Clear Acrylic		LDE1 Lutron Hi-lume 1% Ecosystem LED driver with Soft-on, Fade-To-Black Dimming Driver
CP25 .125 Prismatic Polycarbonate	156P .156 Clear Acrylic		90 90 CRI
CP87 .187 Prismatic Polycarbonate	187P .187 Clear Acrylic		AH Allenhead w/ Center Pin Fasteners
TG .156 Prismatic Temp. Glass	25P .250 Clear Poly.		WL Wet Location
156C .156 Prismatic Acrylic	375P .375 Clear Poly.		
G2 .140 DR Acrylic	F1 .187 Clear Temp.Glass		
H2 .125 White Frosted Polycarbonate	G1 .250 Clear Temp.Glass		
	H1 .375 Clear Temp.Glass		

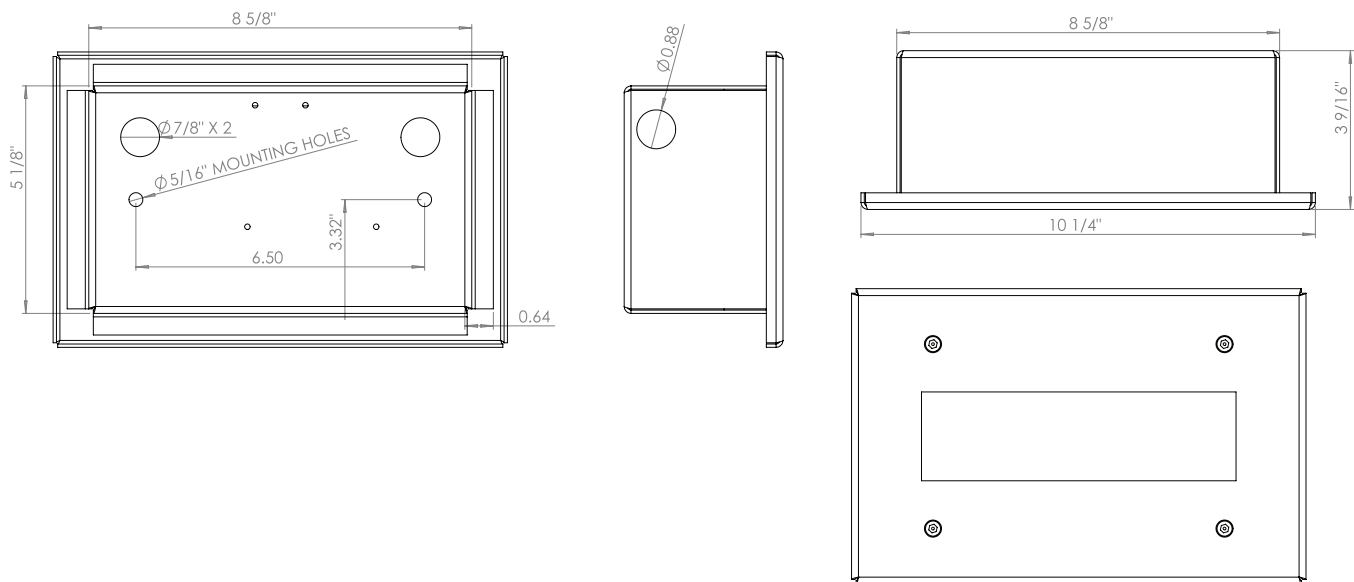

PHOTOMETRICS on Next Page ►