


WALL MOUNTED

BHN

BEHAVIORAL
HEALTHCARE

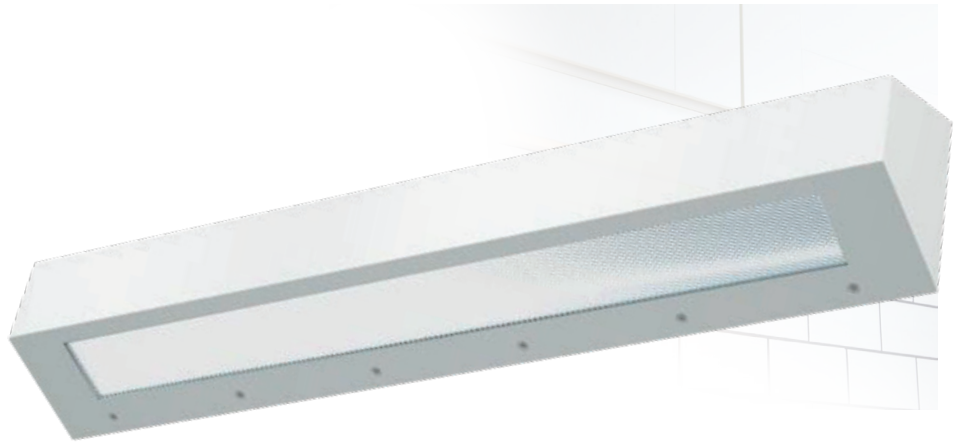

Ligature Resistant



Horizontal Application Only

The **BHN** LED combines maximum security construction with energy saving technology, and is available with LED tubes or wired for tubes. The BHN utilizes one piece clamshell housing as well as security lensing and tamper resistant fasteners for impact resistance and prevent contraband concealment and unwanted fixture penetration. The BHN is ideal for confinement/security applications. Suitable for use in behavioral health, secure corridors and general population areas. Ligature Resistant design.

FASTENERS: Stainless steel tamper-resistant T25 TORX screws standard. Allenhead screws with center reject pin optional.

OPTICAL SYSTEM: Various choices of inner and outer lenses. If additional lens options are required, consult factory.

LISTINGS: Designed for damp locations. Wet location optional. Made in the USA, BAA compliant, and ETL Listed.

FINISH: High gloss, electrostatically applied, white powder coat finish, average minimum reflectance 92%. Anti-microbial paint optional.

HOUSING: Clamshell design combines one-piece die-formed, seamless, door-less housing which maximizes impact resistance and prevents contraband concealment and unauthorized fixture penetration.

BACKPLATE: Die-formed 14 ga. steel backplate forms an irretrievable blade trap to prevent contraband concealment.


WARRANTY: 5 Year Limited Warranty on housing and electronics. Complete warranty and terms located at: www.aelnow.com/warranty.


ORDERING INFORMATION Example: BHN-2-1-17-SH18-125P-125P-M-15-1

SERIES	SIZE	DOWN DIST. # TUBES	UP DIST. # TUBES	LAMP TYPE	WIRE APPL.	HOUSING
BHN	2'	1 1 Tube	1 1 Tube	17 17W T8 (2')	Blank Single Edned*	B20 20 Gauge Cold Roll Steel
	3'	2 2 Tubes	2 2 Tubes	17 17W T8 (3')	DE Double End Wiring**	B18 18 Gauge Cold Roll Steel
	4'			25T8 25W T8 (3')		SH18 18 Gauge Stainless Steel (Polished 304)
				28T8 28W T8 (4')		SH186 18 Gauge Stainless Steel (Polished 316)
				32 32W T8 (4')		SHP18 18 Gauge Stainless Steel (Painted 304)
				*Non-Shunted	SHP186 18 Gauge Stainless Steel (Painted 316)	
				**Shunted sockets wired with white, opposite ended wired with black (DE)	SHB18 18 Gauge Stainless Steel (Brushed 304)	
					SHB186 18 Gauge Stainless Steel (Brushed 316)	
					ALH .063" Aluminum (Painted)	


INNER LENS	OUTER LENS	VOLTAGE	WATTAGE	CIRCUITS	OPTIONS
125P .125" Clear Polycarbonate	125P .125 Clear Polycarbonate	M Multi-Volt (120-277VAC)	10 10 Watt 24" or 36"	1 1 Circuit	14EBLT 14 Watt Emergency Ballast
156P .187" Clear Polycarbonate	187P .187 Clear Polycarbonate		12 12 Watt 48"	2 2 Circuits	AM Anti-microbial Matte White Paint
187P .187" Clear Polycarbonate	250P .250 Clear Polycarbonate		15 15 Watt 36" or 48"		AH Allen Head Screws With Center Pin Reject
	375P .375 Clear Polycarbonate		18 18 Watt 48"		WL Wet Location
	500P .500 Clear Polycarbonate		20 20 Watt 48"		VDO Lutron Vive integral fixture controller (RF with daylight and occupancy sensing)
A125 .125" Clear Acrylic	F1 .187 Clear Tempered Glass				BAHCR Continuous Run Ready
A156 .156" Clear Acrylic	G1 .250 Clear Tempered Glass				PH Piano Hinge
	H1 .375 Clear Tempered Glass				OS4UC Occupancy Sensor
					DO Downlight Only

Ligature-Resistant

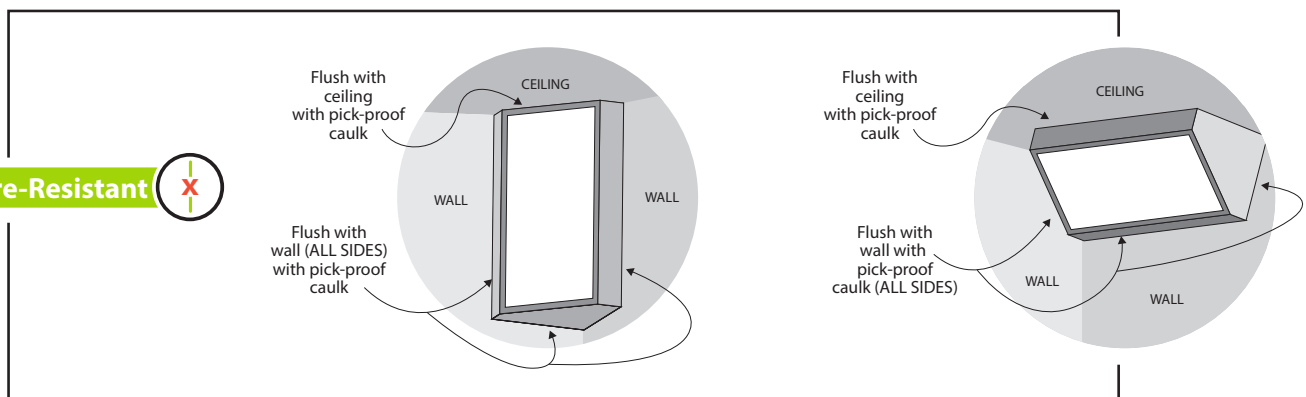

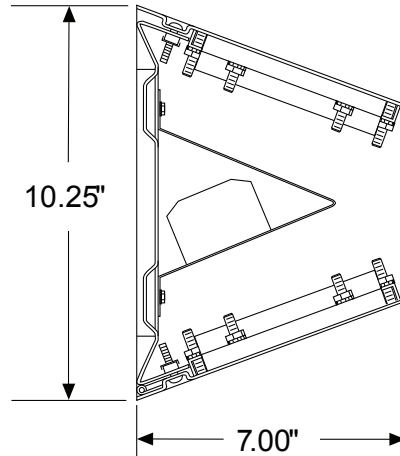

BAN2

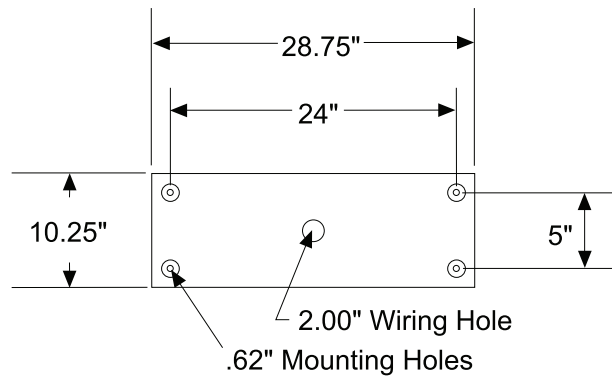

BAN4

