

DTH UP/DOWN CYLINDER LIGHT



Applications : This wall sconce, also known as LED up and Down Light, is a bidirectional light with two 15 Watt integrated LED's throwing light in the upward and downward direction. The total brightness is high enough to brighten up a large area of the wall. These lights are available in 3000 or 5000 Kelvin. These lights also are ETL certificated and come with a Manufacturer's Warranty of 5 years.

Features:

- Available in 3000K and in 5000k color temperature
- 120 AC 50/60 Hz input voltage providing long-life LEDs with 153,000 hours of operation
- 2,449 to 2,509 lumens with 82 lm/mv
- Power factor > 0.9
- Color rendering index > 80
- Dark bronze aluminum housing and glass lenses
- Easy installation in new construction and retrofit
- Switch inside to change from both up and down to just down
- Total harmonic distortion <20%


Warranty & Details:

- ETL listed for wet locations
- Complies with FCC part 15, Class B
- Energy star qualified
- Complies with EN61000-4-5, surge immunity protection (1KV)
- 5-year warranty of all electronics and housing

ORDERING INFORMATION:


SERIES	CCT	WATTAGE	LUMENS	TOTAL LUMENS
DTH-3	3000K	30W	82	2,449

SERIES	CCT	WATTAGE	LUMENS	TOTAL LUMENS
DTH-5	5000K	30W	82	2,509

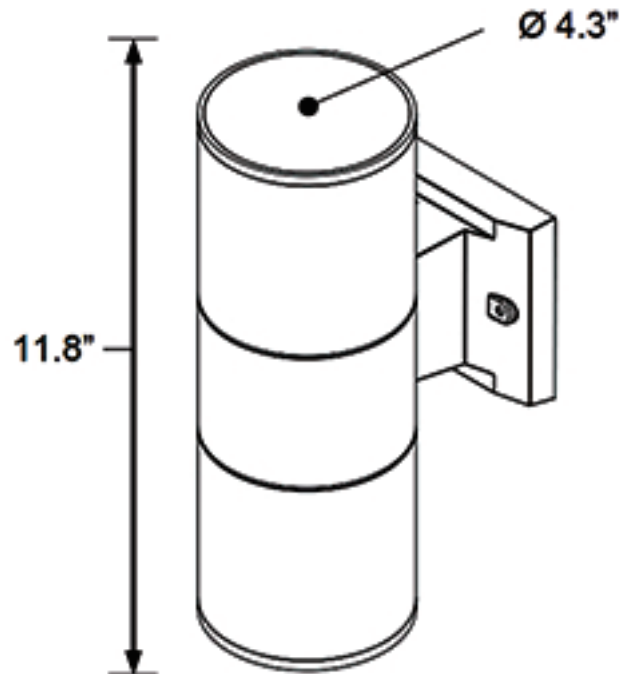

M.H.	F.C.	Width
4'	109	3.3'
6'	48	5.0'
8'	27	6.6'
10'	17	8.3'
12'	12	10.0'
14'	9	11.6'
16'	7	13.3'

Cone of Light



Candela Table (lm)

0°	1,746
10°	1,512
20°	997
30°	589
40°	277
50°	22
60°	6
70°	4
80°	4
90°	0
100°	4
110°	4
120°	6
130°	22
140°	277
150°	589
160°	997
170°	1,512
180°	1,745

