

COVERED WALL UNIT

F555

LUMINAIRE



This covered wall unit is designed to provide maximum lumen output in areas such as hallways, bathrooms, kitchens, stairways, and hospitals. An assortment of options in either single or double lamp allows this utility wall and surface mounted unit to satisfy a variety of lighting needs.

HOUSING: Housing is designed from heavy gauge die formed steel and finished in either baked white enamel or polyester powder coating. Socket plate is riveted to housing adding to the structural support of the fixture. Lens is extruded white acrylic. End plates are attached by acorn nuts and secure the lens to the fixture.

ELECTRICAL: All units are furnished with UL Listed Class P thermally protected driver. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp location M 59006648.


MOUNTING: Unit is equipped with holes and 7/8" knockouts in housing for surface mounting. Fixture may be mounted individually or with optional joiner bands may be used in a continuous run.

LISTINGS: UL Certified for damp locations.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty



Ordering Information on Next Page ►

Ordering Example: F555-4-4K-8960-EMB

SERIES	SIZE	CCT	ILLUMINATION ⁽¹⁾	OPTIONS
F555	18 18 inches 2 2 Feet 3 3 Feet 4 4 Feet	3K 3000K 35K 3500K 4K 4000K 5K 5000K	 3166 (17W) 4350 (24W) 5470 (31W) 6452 (39W) 3159 (20W) 4480 (30W) 5684 (42W) 6318 (40W) 8960 (60W) 11368 (84W)	EMB Emergency ballast REFS Silver Reflector OCC-E External Occupancy Sensor BI-LEV Bi-level dimming system O Grounded outlet TOG Toggle Switch PULL Pull chain switch NL Night Light 3WAY 3 way system BF Center baffle PRIS Prismatic lens DL Down light only POLY Polycarb lens FR Frosted lens over LED boards VP Vandal Proof

NOTES: 0-10v low voltage dimming standard per fixture (1) Higher and custom lumen packages available upon request. Inquire with factory for lumen options of 18" and 36" models.

DIMENSIONS

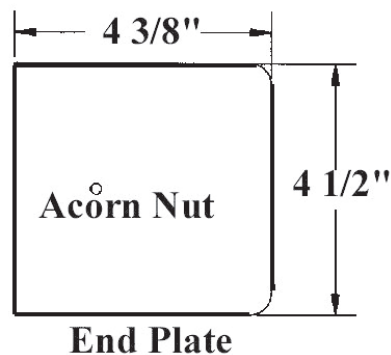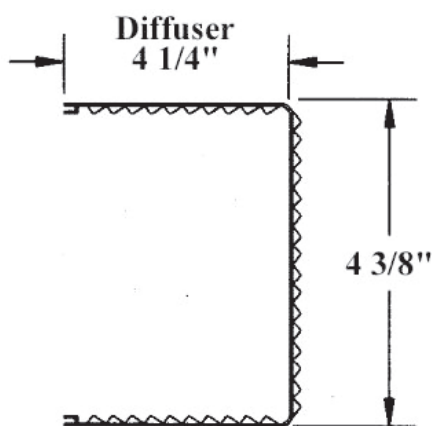

Fixture Length

T12	T12HO	T8	Length
F15T12	---	---	18"
F20T12	---	F17T8	24"
F30T12	---	F25T8	36"
F40T12	F48T12HO	F32T8	48"