


LCDISL

CCT/Wattage Selectable
LED Center Basket

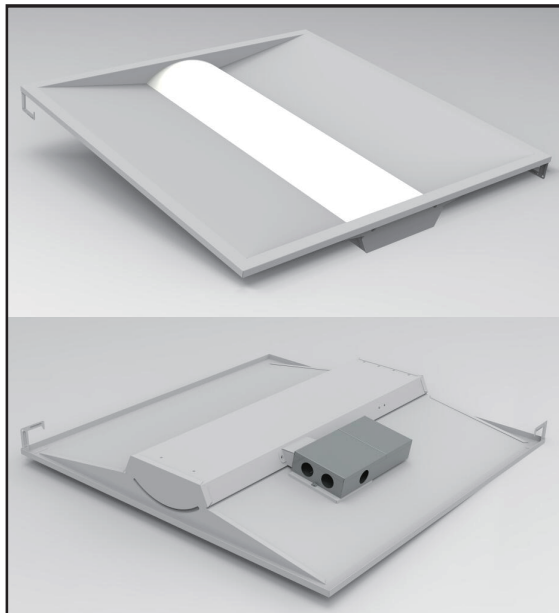

PRODUCT SPECIFICATIONS

DESCRIPTION

The LCDISL series is an LED center basket with selectable 3500K, 4000K, or 5000K color temperatures. Selectable wattage options allow quick changes to lumen output with the flip of a switch.

APPLICATIONS

The LCDISL Series is designed to be a high quality, energy efficient LED fixtures for use in hotel lobbies, offices, common areas, hospitals, museums, retail, schools, and professional business environments.

CONSTRUCTION

The fixture is constructed of a heavy gauge steel body. Housing embossed for maximum rigidity. Rounded side flanges for safe handling. Ballast Cover snaps into housing to cover ballast and wires. White polyester polymer finish with a minimum 93% reflectivity.

ELECTRICAL SYSTEM

Color temperature selectable in 3500K, 4000K, and 5000K. 0-10V dimming driver included standard. Long-life LED system rated for >50K life hours (L70 @ 25°C). Metal gear tray for internal LED driver. Complies with federal energy efficiency standards.

MOUNTING

The fixture can be recess mounted in a standard grid ceiling, or surface mounted with a surface mount shroud.

LISTINGS

Independently tested to IESNA LM-79 and LM-80 specifications. UL and cUL Listed. Damp location rated.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

ORDERING INFORMATION

Example: LCDISL24-S-S-M

SERIES	CCT	OUTPUT	VOLTAGE	OPTIONS
LCDISL22 2x2	S Selectable CCT	S Selectable Wattage	M 120/277 (Multi-volt)	LCDIEM ^{1,2} 1000 Lumen Emergency
LCDISL24 2x4	3500K, 4000K, 5000K	30W/35W/40W (2x2) 30W/40W/50W (2x4)		SMS22 2x2 Surface Mount Shroud SMS24 2x4 Surface Mount Shroud


¹When ordering fixtures with Emergency, the fixture comes preset for 50 watts and must be adjusted in the field.

²2X2 and 2x4 fixtures are only available in 40W/50W selectable on fixtures with emergency installed.

Without emergency, 2X2 is only available in 30W/35W/40W selectable wattage, and 2X4 is only available in 30W/40W/50W selectable wattage.

Output	Delivered Lumens	Luminous Efficacy	L70 @20C (hrs)
30W	3000	100 lm/W	>50K
35W	3500	100 lm/W	>50K
40W	4000	100 lm/W	>50K
50W	5000	100 lm/W	>50K

DIMENSIONS

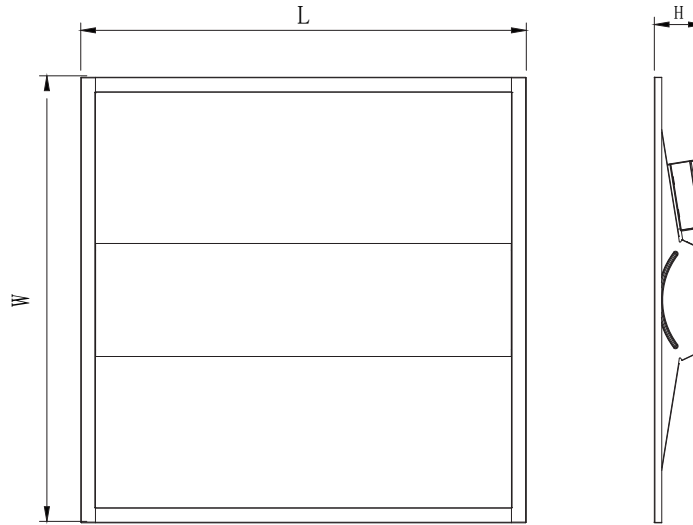

Size		2X2	2X4
Dimensions (inch)	L	23.74"	47.75"
	W	23.74"	23.74"
	H	2.61"	2.61"