


LDL23DS

2" X 3" DIRECT LIGHTING SUSPENDED LUMINAIRE

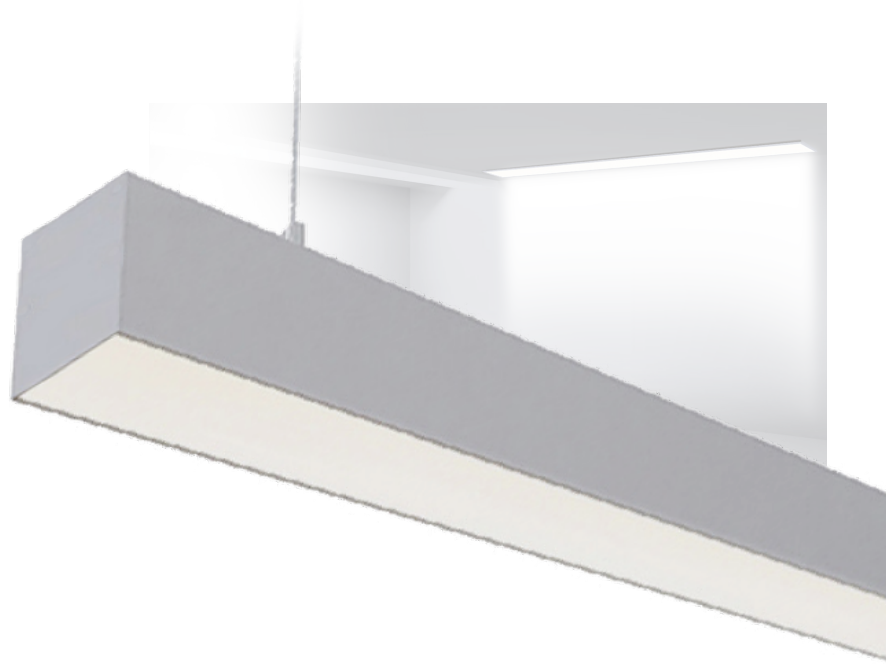

The LDL23DS is a 2"x3" linear fixture designed for use in a wide variety of uses, including corridors, lobbies, office areas and more. This is a unique and compact fixture with a complete array of options. These can be installed individually or in continuous runs. Plus our snap-in lens does a great job of hiding internal components.

CONSTRUCTION: Die-formed and welded 22-gauge cold rolled steel with knockouts on each end. Housing is designed for direct lighting.

OPTICAL SYSTEM: High output LED's available in 3000K, 3500K, 4000K, and 5000K. CRI >82 with 90 CRI as an option. Standard snap-in satin lens provides a beautiful architectural design while maintaining optimal light output.

ELECTRICAL SYSTEM: Our LDL23DS achieves 80% LED lumen maintenance at 60,000 hours using long-life LEDs. Coupled with high-efficiency drivers, this LUMINAIRE provides superior illumination and an extended service life. Electronic drivers are available for 120/277V applications, 0-10v dimming standard. Metal gear tray for internal LED driver. Complies with federal energy efficiency standards.

MOUNTING: This fixture is designed to be suspended mounted. Continuous run available.

LISTINGS: Independently tested to IESNA LM-79 and LM-80 specifications. ETL and cETL listed.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty

Ordering Information on Next Page ►

ORDERING INFORMATION. Example: LDL23DS-4-40-10L-CP50-W-M

SERIES	CCT	OUTPUT	LENS	VOLTAGE	FINISH	LENGTH	DRIVER OPTIONS
LDL23DS	30 3000K 35 3500K 40 4000K 50 5000K	5L 500 lm/ft 7L 700 lm/ft 10L 1000 lm/ft 14L 1400 lm/ft XXXL XXX lm/ft	S Satin Lens	M Multi-Volt (120-277V)	MW Matte White MB Matte Black SP Special Finish	2 2 ft. 3 3 ft. 4 4 ft. 5 5 ft. 6 6 ft. 7 7 ft. 8 8 ft. XX XX ft.	(BLANK) 0-10V 10% dimming driver CD1 0-10V 1% dimming driver CD5 0-10V 5% dimming driver EDN Non-dimming electronic driver LDE1 Lutron Hi-Lume 1% EcoSystem LED Driver


OPTIONS	HANGING OPTIONS
12EBL 1200 Lumen Emergency Ballast	CPPF100 Cord Pendant (Power Feed Capable) 100" (8.25 feet)
FW Flex Whip Cable 6'	CP100 Cord Pendant (No Power Feed) 100" (8.25 feet)
VDO Lutron Vive Integral fixture control (RF with Daylight and Occupancy Sensing)	CPPF150 Cord Pendant (Power Feed Capable) 150" (12.5 feet)
	CPP150 Cord Pendant (No Power Feed) 150" (12.5 feet)
	CPFX100-5W 5-Wire Cord Pendant (Power Feed) 100" (8.25 feet)
	RPXX Rigid Pendant (Power Feed Capable) - Specify Length (XX)
	Consult factory for custom suspension lengths

OUTPUT	5L	7L	10L	12.5L	14L	20L	25L
Lumens/Ft*	500	700	1000	1250	1400	2000	2500
System Wattage/Ft	3.125W	4.375W	6.25W	7.8W	8.75W	12.0	13.9
Efficacy (Lm/W)	160	160	160	160	160	160	160
CRI	>82	>82	>82	>82	>82	>82	>82
Dimming	0-10V	0-10V	0-10V	0-10V	0-10V	0-10V	0-10V
Color Consistency	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM
Rated Life (L70)	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs


*Lumen output was calculated with 4000K LEDs.

Dimension on Next Page 


DIMENSIONS

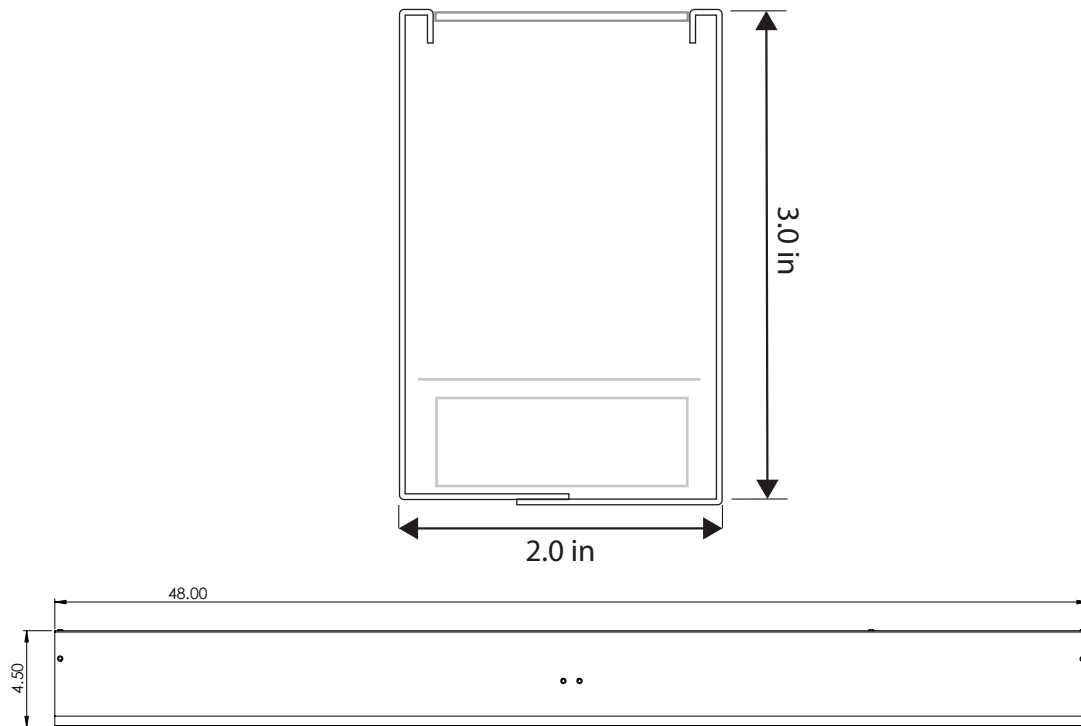


HANGING OPTIONS

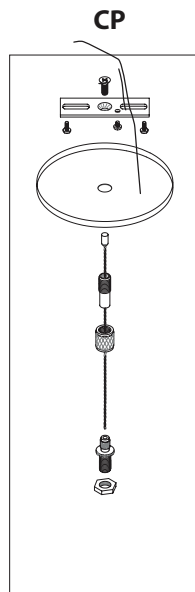

Cord Pendant
(No Power Feed)

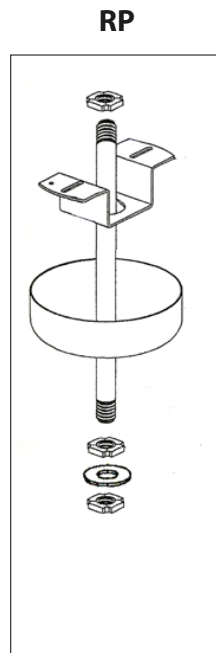

Rigid Pendant
(Power Feed Capable)

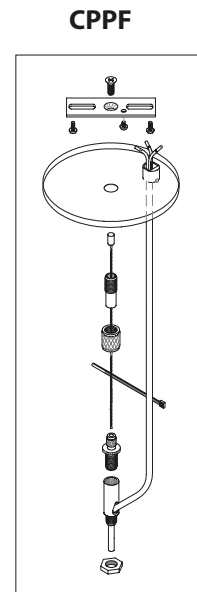

Cord Pendant
(Power Feed Capable)