




## LDL4SMA

4"x4.5" Surface Mount Direct  
Aluminum Designer LED

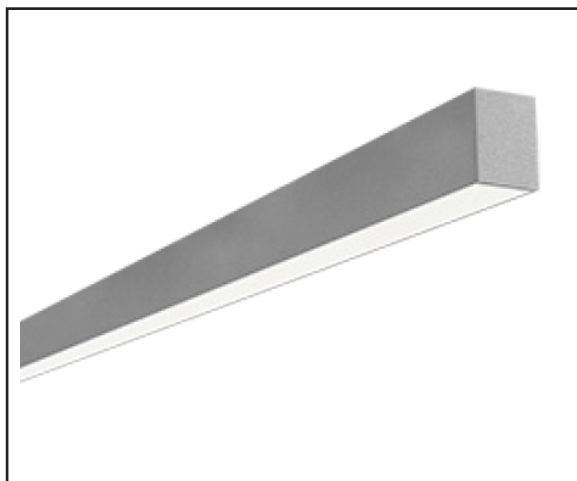

STANDARD

OPTIONAL



## PRODUCT SPECIFICATIONS

### DESCRIPTION:

The LDL4SMA is an architecturally designed Surface Mount Direct Aluminum LED Luminaire that is classically styled and fit for any interior. It is available for continuous run mounting.

### APPLICATIONS:

The LDL4SMA Series of Surface Mount Direct Aluminum LED Luminaires were designed to be high quality, energy efficient LED fixtures for use in commercial applications, offices, hotel lobbies, museums, government facilities, schools, and public areas.

### CONSTRUCTION:

The fixture is constructed of a 4" wide heavy gauge extruded aluminum body. The LDL4SMA is available in any run length withing 1' increments.

### OPTICAL SYSTEM:

Electronic drivers are available for 120/277V applications. 0-10V Dimming Standard. Long-life LED system rated for >120,000 life hours (L70@25° C). Metal gear tray for internal LED driver. Complies with Federal Energy Efficiency Standards.

### ELECTRICAL SYSTEM:

Electronic drivers are available for 120/277V applications. 0-10V Dimming Standard. Long-life LED system rated for >120,000 life hours (L70@25° C). Metal gear tray for internal LED driver. Complies with Federal Energy Efficiency Standards.

### MOUNTING:

This fixture is designed to be surface mounted. Continuous run available.

### LISTINGS:

Independently tested to IESNA LM-79 and LM-80 specifications. UL and cUL Listed.

### WARRANTY:

5-Year Limited Warranty. Complete warranty and terms located at [www.aelnow.com/warranty](http://www.aelnow.com/warranty)

## ORDERING INFORMATION


Example: LDL4SMA35MSMW8

Options: 12EBL

SERIES	CCT	OUTPUT	LENS	VOLTAGE	FINISH	ROW LENGTH
LDL4SMA	30	3000K	S	M	W	2
	35	3500K				3
	40	4000K				4
	50	5000K				5
						6
						7
						8
						XX

DRIVER OPTIONS		OPTIONS		WIRING HARNESS	
BLANK	0-10V Dimming Driver (included standard)	12EBL	1200 Lumen Emergency Ballast	WH34	3-Wire 4 Feet
CD1	0-10V 1% to Off Dimming Driver	FW	Flex Whip Cable 6'	WH44	4-Wire 4 Feet
CD5	0-10V 5% to Off Dimming Driver	VDO	Lutron Vive Integral fixture control (RF with Daylight and Occupancy Sensing)	WH54	5-Wire 4 Feet
EDN	Electronic Driver Non-Dimming	FCJS0	Lutron Vive Attached Fixture Control (RF Only for 0-10V Drivers)	WH38	3-Wire 8 Feet
FLDD	Fifth Light Dali, Dimming	OC4EX	Occupancy Sensor	WH48	4-Wire 8 Feet
LDE1	Lutron Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology			WH58	5-Wire 8 Feet
LDE5	Lutron LDE5 5-Series Ecosystem 5% Dimming				
PSQ02U	Lutron T-Series 1% 2-Channel Tunable White				

### FIXTURE DIMENSIONS

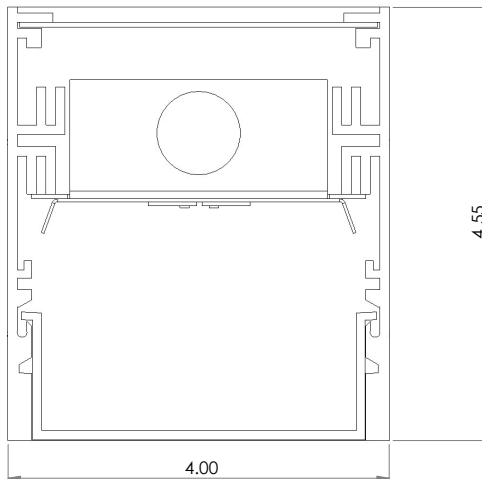


### ROW CONFIGURATIONS

AEL would like to double check your Bill of Material upon placement of your order if the number of rows and their individual row lengths are provided on the purchase order as follows:

Row 1 - 8'      Row 2 - 8'      Row 3 - 20'      Row 4 - 20'

\*Please provide any additional pertinent information such as additional power drops required mid-row.

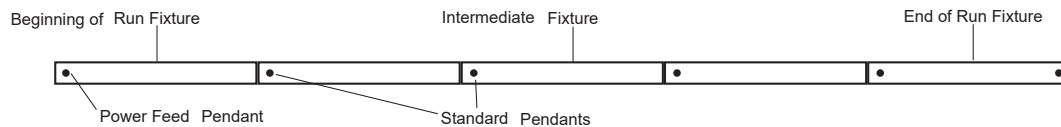

Row Length	2'	4'	6'	8'	10'	12'	14'	16'	18'	20'	22'	24'	26'	28'	30'	32'	34'	36'	38'	40'	42'	44'	46'	48'
Fixture Length	2'	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Fixture Length	4'	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Fixture Length	8'	1	1	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6
Total Pendants Needed	2	2	3	2	3	3	4	3	4	4	5	4	5	5	6	5	6	6	7	6	7	7	8	7

### LED SYSTEM DATA

Output	Delivered Lumens Per Foot	System Wattage Per Foot	CRI	LPW
Standard	506 Lm/Ft	3.3	82	148
High Standard	709 Lm/Ft	5.1	82	139
Medium	965 Lm/Ft	6.9	82	140
High Medium	1,468 Lm/Ft	10.3	82	143

Additional Lumen options available add desired lumens to end of part #  
 e.g. LDL4SMA40MSMW43500

### ENERGY AND PERFORMANCE DATA

Input Voltage	120/277 VAC
Standard Dimming Control	0-10V
CCT	3000, 3500, 4000, 5000 Kelvin
CRI	82 (minimum)
Life Time Rating	>120,000 hrs at L70
Input Frequency	50/60Hz
Power Factor	>0.9
Operating Temp	Low Ambient -20°C/ High Ambient 50°C

Quick reference Output Guide Standard		
Length	Lumens	Wattage
2 Foot	1012	6.6
3 Foot	1518	9.9
4 Foot	2024	13.2
6 Foot	3036	19.8
8 Foot	4048	26.4

Quick reference Output Guide High Standard		
Length	Lumens	Wattage
2 Foot	1418	10.2
3 Foot	2127	15.3
4 Foot	2836	20.4
6 Foot	4254	30.6
8 Foot	5672	40.8

Quick reference Output Guide Medium		
Length	Lumens	Wattage
2 Foot	1930	13.8
3 Foot	2895	20.7
4 Foot	3860	27.6
6 Foot	5790	41.4
8 Foot	7720	55.2

Quick reference Output Guide High Medium		
Length	Lumens	Wattage
2 Foot	2936	20.6
3 Foot	4404	30.9
4 Foot	5872	41.2
6 Foot	8808	61.8
8 Foot	11744	82.4