


LDL6DS

6" DESIGNER
LED SUSPENDED
DIRECT STEEL LUMINAIRE

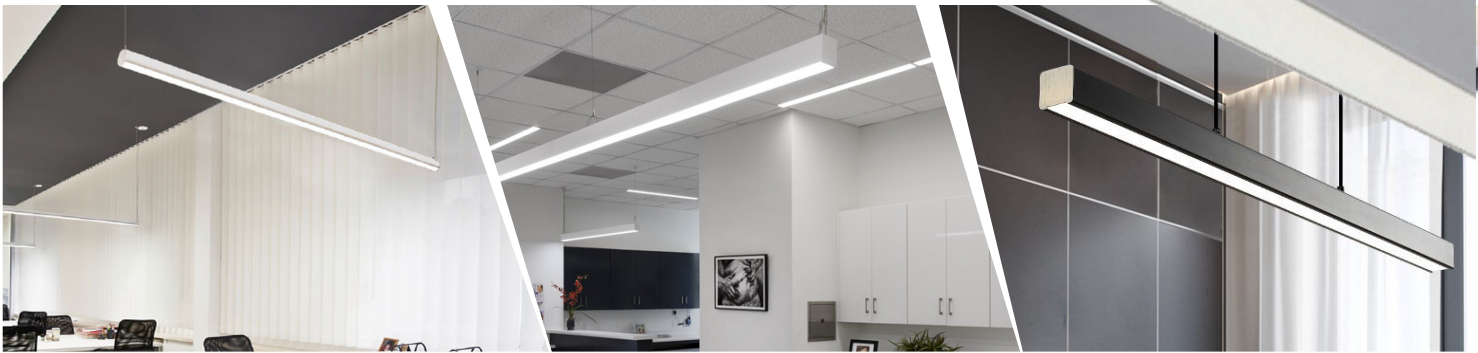

The **LDL6DS** Series is an architecturally designed Suspended Direct Steel LED Luminaire that is classically styled and fit for any interior. It is available for continuous run mounting.

APPLICATIONS: The LDL6DS Series of Suspended Direct Steel Luminaires were designed to be high quality, energy efficient LED fixtures for use in commercial applications, offices, hotel lobbies, museums, government facilities, shopping malls, schools, and other public areas.

CONSTRUCTION: Our LDL6DS is constructed of a 6" wide heavy duty steel body. The fixture is available in any run length within 1' increments. Heavy duty housing crimped along sides for extra rigidity and straight alignment.

OPTICAL SYSTEM: High output LED's available in 3000K, 3500K, 4000K, and 5000K. CRI >82. Satin lens provides for a beautiful architectural design while maintaining optimal light output. Also available with as a wall-wash (select option on next page).

ELECTRICAL SYSTEM: Electronic drivers are available for 120/277V applications, 0-10V Dimming driver included standard. Long-life LED system rated for >120K life hours (L70 @ 25° C). Metal gear tray for internal LED driver. Complies with federal energy efficiency standards.

MOUNTING: This fixture is designed to be suspended. Continuous run available.

LISTINGS: Independently tested. ETL listed.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

Ordering Information on Next Page ►

ORDERING INFORMATION. Example: LDL6DS-30-M-S-M-W-8-WW

SERIES	CCT	OUTPUT	LENS	VOLTAGE	FINISH	LENGTH	DRIVER OPTIONS
LDL6DS	30 3000K 35 3500K 40 4000K 50 5000K	5L 500 lm/ft 7L 700 lm/ft 10L 1000 lm/ft 14L 1400 lm/ft XXXL XXX lm/ft	S Satin Lens	M Multi-Volt (120-277V)	MW Matte White MB Matte Black SP Special Finish	2 2 ft. 3 3 ft. 4 4 ft. 5 5 ft. 6 6 ft. 7 7 ft. 8 8 ft. XX XX ft.	(BLANK) 0-10V 10% dimming driver CD1 0-10V 1% dimming driver CD5 0-10V 5% dimming driver EDN Non-dimming electronic driver LDE1 Lutron Hi-Lume 1% EcoSystem LED Driver


OPTIONS

12EBL	1200 Lumen Emergency Ballast
FW	Flex Whip Cable 6'
VDO	Lutron Vive Integral fixture control (RF with Daylight and Occupancy Sensing)
EC	Emergency Circuit
RT1	Recessed Trim for Drywall
RT2	Recessed Trimless for Drywall
RTB	Recessed T-Bar Grid (9/16" & 15/16")
RSS	Recessed Screw Slot Grid (9/16" & 15/16")


HANGING OPTIONS

CPPF100	Cord Pendant (Power Feed Capable) 100" (8.25 feet)
CP100	Cord Pendant (No Power Feed) 100" (8.25 feet)
CPPF150	Cord Pendant (Power Feed Capable) 150" (12.5 feet)
CP150	Cord Pendant (No Power Feed) 150" (12.5 feet)
CPEX100-5W	5-Wire Cord Pendant (Power Feed) 100" (8.25 feet)
RPXX	Rigid Pendant (Power Feed Capable) - Specify Length (XX)


Consult factory for custom suspension lengths

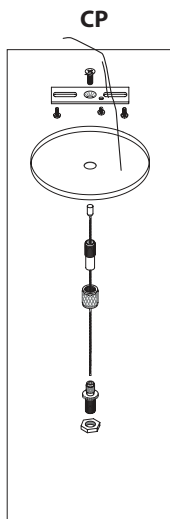

**Cord Pendant
(No Power Feed)**

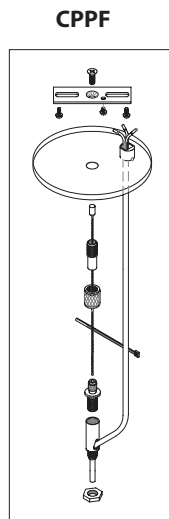


**Cord Pendant
(Power Feed Capable)**

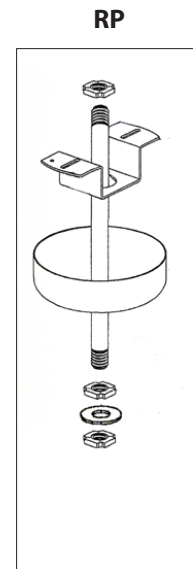

**Rigid Pendant
(Power Feed Capable)**

Dimensions on Next Page ►

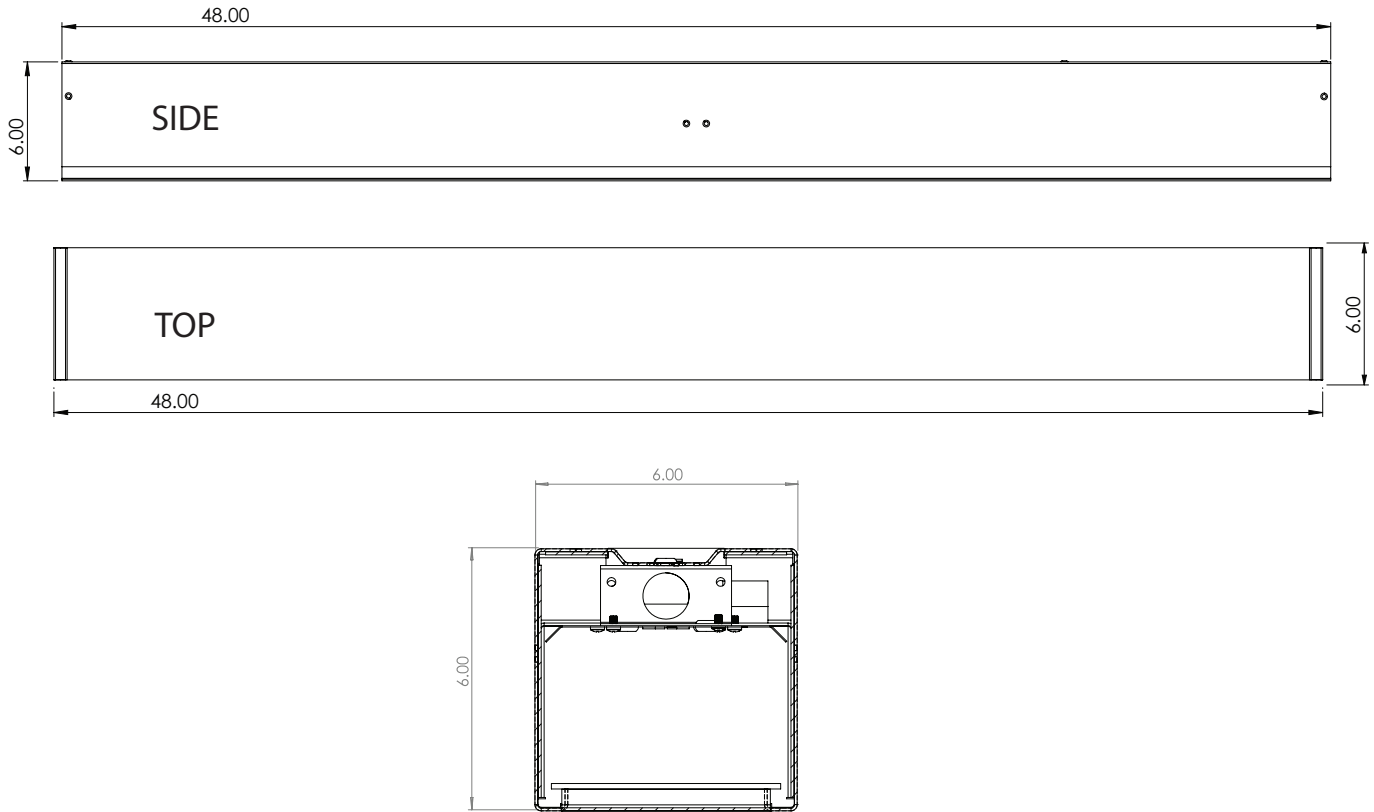

**ALL LENGTHS WILL BE ON EXACT 1' MEASUREMENTS (I.E. 8' WILL BE EXACTLY 96").
ANY CUSTOM SIZE IS POSSIBLE THOUGH.**