


LDL6WDIDS

6"X6" LINEAR WALL MOUNT DIRECT/INDIRECT STEEL LED LUMINAIRE

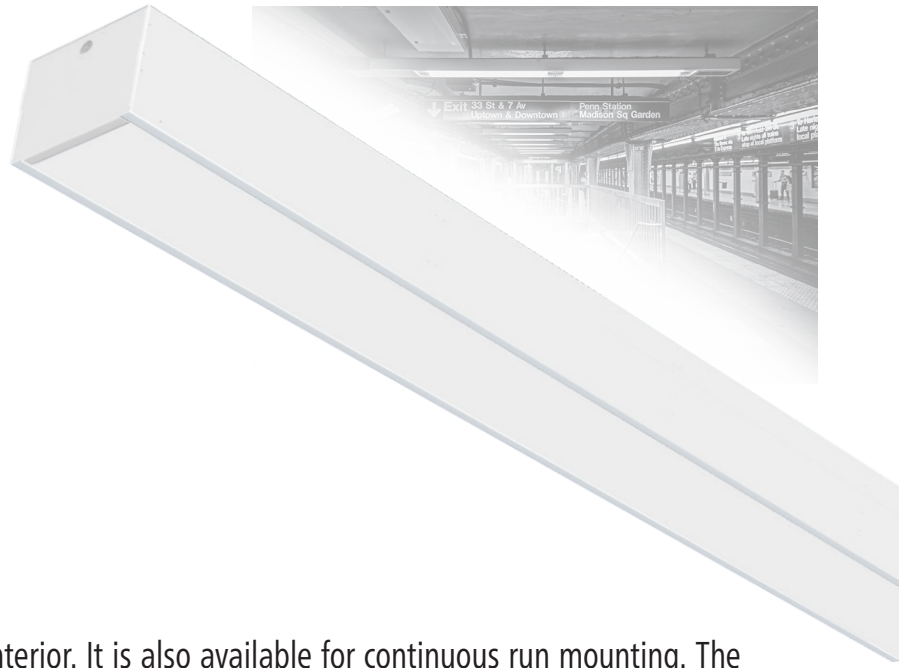

The LDL6WDIDS is classically styled and fit for any interior. It is also available for continuous run mounting. The LDL6WDIDS LED Luminaires are designed to be high quality, energy efficient fixtures for use in commercial applications, offices, hotel lobbies, museums, government facilities, schools, and public areas.

CONSTRUCTION: The fixture is constructed of a 6" wide heavy gauge steel body. The LDL6WDIDS is available in any run length with 1' increments. Heavy duty housing crimped along sides for extra rigidity and straight alignment.

OPTICAL SYSTEM: High output LED's available in 3000K, 3500K, 4000K, and 5000K. CRI >82 (90 CRI is available). Satin lens provides for a beautiful architectural design while maintaining optimal light output.

ELECTRICAL SYSTEM: 0-10v dimming driver included standard. Long-life LED system rated for >100,000 life hours (L70@25°C). Metal gear tray for internal LED driver. Complies with Federal Energy Efficiency Standards.

MOUNTING: This fixture is designed to be wall mounted. Continuous run available.

LISTINGS: ETL and cETL listed. RoHS compliant. Suitable for wet locations. BAA and BABA Compliant.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty. 10 year warranty available as an option below.


Ordering Information on Next Page ►

Ordering Example: LDL6WDIDS-6-40-10L-40-10L-S-M-W


SERIES	LENGTH	CCT UP	OUTPUT UP	CCT DOWN	OUTPUT DOWN	LENS	VOLTAGE	FINISH
LDL6WDIDS	2 2 ft. 3 3 ft. 4 4 ft. 5 5 ft. 6 6 ft. 7 7 ft. 8 8 ft. XX XX ft.	30 3000K 35 3500K 40 4000K 50 5000K	5L 500 lm/ft 7L 700 lm/ft 10L 1000 lm/ft 14L 1400 lm/ft XXXL XXX lm/ft	30 3000K 35 3500K 40 4000K 50 5000K	5L 500 lm/ft 7L 700 lm/ft 10L 1000 lm/ft 14L 1400 lm/ft XXXL XXX lm/ft	S Satin	M Multi-Volt (120-277 V)	W Matte White SP Special Finish

CIRCUITS	OPTIONS
1 1 Circuit 2 2 Circuits	14EBL 14 Watt Emergency Ballast FW Flexible Armored Cable 6' 18/3 FW5 Flex Whip 5-Wire 18/5

FIXTURE DIMENSIONS

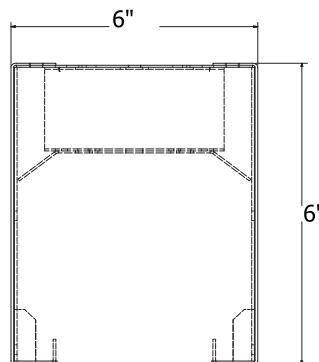

For Continuous Run Mounts:



LED Information

OUTPUT	5L	7L	10L	14L
Lumens	500	700	1000	1400
System Wattage/Ft.	3.125W	4.375W	6.25W	8.75W
Efficacy (Lm/W)	160	160	160	160
CRI	>82	>82	>82	>82
Dimming	0-10V	0-10V	0-10V	0-10V
Color Consistency	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM
Rated Life (L70)	>100,000 hrs.	>100,000 hrs.	>100,000 hrs.	>100,000 hrs.

Lumens calculated with 4000K CCT LEDs