

Catalog #	
Project	
Date	
Type	

LPT8

T8 LOW-PROFILE KNOCKDOWN STRIP LUMINAIRE



ORDERING INFORMATION

Example: LPT8132M

PRODUCT SPECIFICATIONS

DESCRIPTION

The LPT8 Series is a T8 Low-Profile Knockdown Fluorescent Strip available in 1' through 8' body lengths. It was designed for surface or suspended mounting applications.

APPLICATIONS

The LPT8 Luminaire is designed to be a high quality, energy efficient fixture for use in outdoor facilities, high rise garages, building exteriors, educational facilities, commercial applications, office buildings, government facilities, schools, recreational facilities, and other intensive use environments are the perfect types of environments for this Luminaire.



CONSTRUCTION

The fixture is constructed of a heavy gauge cold rolled steel body.

OPTICAL SYSTEM

White polyester polymer finish with a high reflectivity. Pre-painted 93% high reflective finish for maximum light output.

ELECTRICAL SYSTEM

Standard 120-277V electronic instant start ballasts for T8 lamping, ≤10% THD. Standard 120-277V electronic program start ballasts for T5 lamping, ≤10% THD. 50-60 Hz operation. Sound rated A. Thermally protected. Automatic resetting Class P. High Power Factor. Non PCB.

MOUNTING

Surface or pendant mount, individually or in continuous rows. Sufficient knockouts are provided. Double KO access on 4 ft and longer to facilitate wiring of units for multiple ballast configurations.

LISTINGS

UL and cUL Listed. Damp location rated.

WARRANTY


1-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

LPT8				
SERIES	LAMPS PER SECTION	WATTAGE	VOLTAGE	BALLAST OPTIONS
LPT8	1	17 17Watt T8 25 25Watt T8 28T8 28Watt T8 32 32Watt T8	M Multi-Volt (12-277VAC)	(Blank) NORMAL Instant Start L LOW Instant Start H HIGH Instant Start EPBL Electronic Ballast Program Low EBPN Electronic Ballast Program Normal EBPH Electronic Ballast Program High CD2LT8 Continuous Dimming, 1 or 2 Lamp T8 SD2LT8 Step Dimming, 1 or 2 Lamp T8


EMERGENCY OPTIONS	HANGING OPTIONS	REFLECTOR OPTIONS
EM5 90-Minute 500 Lumens EM7 90-Minute 700 Lumens EM14 90-Minute 1400 Lumens	(Blank) None AC10 Aircraft Cable 10' AC15 Aircraft Cable 15' AC20 Aircraft Cable 20' JC10 10' Jack Chain 3-Piece w/S-Hooks	LPT8SS Symmetrical Reflector LPT8AS Asymmetrical Reflector LPT8IAS Inside Asymmetrical Reflector LPT8EL Elliptical Reflector LPT8O Opal Lens (per linear foot)

T8 LOW-PROFILE KNOCKDOWN STRIP LUMINAIRE

T8 FIXTURE LENGTHS

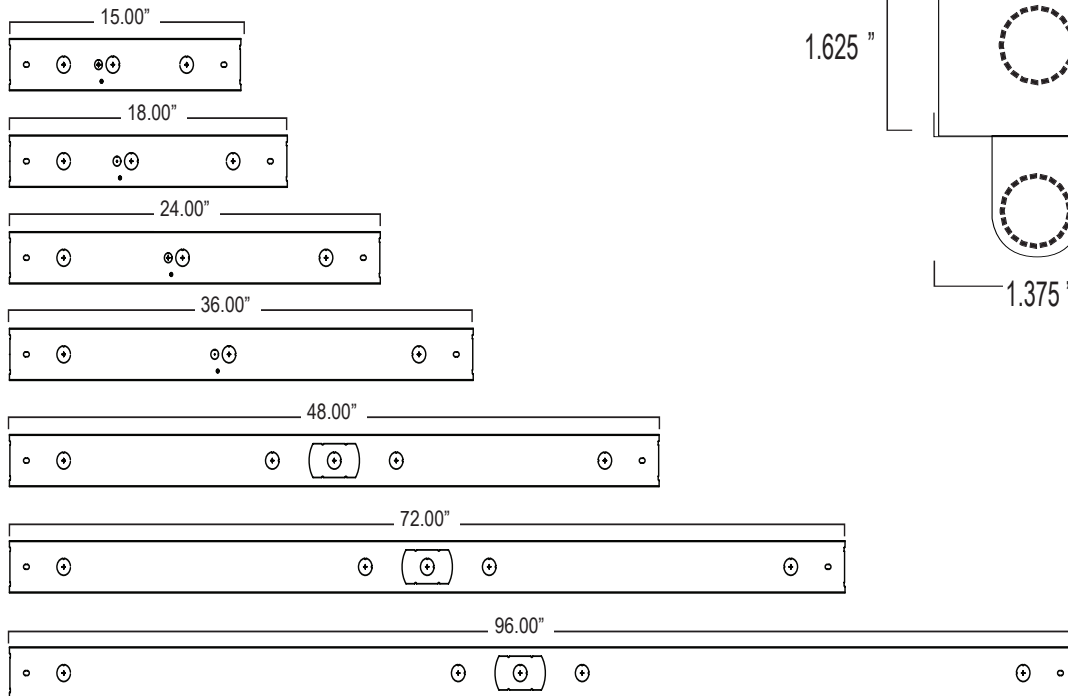

FIXTURE DIMENSIONS

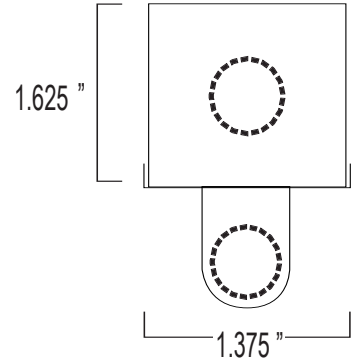

REFLECTOR OPTIONS

