


## LSDL24A

2.5"x4.5" Linear LED Square Aluminum Luminaire

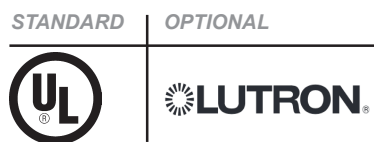

### PRODUCT SPECIFICATIONS

#### DESCRIPTION

The LSDL24A Series is a Linear LED Square Aluminum Luminaire designed to illuminate while contributing to the overall design of any project. Specially designed and custom built, the LSDL24A is a unique addition to any space.

#### APPLICATIONS

The LSDL24A Linear Square Aluminum Luminaires are designed to be high quality, energy efficient LED fixtures for use in offices, shopping centers, multi-family spaces, government facilities, schools, and public areas.

#### CONSTRUCTION

The fixture is constructed of a 2.5" wide x 4.55" tall extruded aluminum housing. Direct/Indirect and Indirect applications available; please contact factory.

#### ELECTRICAL SYSTEM

Electronic drivers are available for 120/277V applications. Long-life LED system rated for >100K life hours (L70 @ 25°C). Metal gear tray for internal LED driver. Complies with Federal energy efficiency standards.

#### MOUNTING

The fixture is designed for surface mounting, wall mounting, or suspended mounting applications.

#### LISTINGS

UL and cUL Listed. Damp location rated.

#### WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at [www.aelnow.com/resources](http://www.aelnow.com/resources).

### ORDERING INFORMATION


Example: LSDL24A35SSLM48A

SERIES	COLOR TEMP	OUTPUT	LENS	VOLTAGE
LSDL24A	30	3000K	S Satin CG Clear Dust Guard (Indirect Only)	M 120/277 VAC 347/480 347/480 VAC
	35	3500K		
	40	4000K		
	50	5000K		
	SL	Standard Low		
	ML	Medium Low		
	HL	High Low		
	SM	Standard Medium		
	MM	Medium Medium		
	HM	High Medium		
SH	Standard High			
MH	Medium High			
HH	High High			

DIMENSIONS (SQUARED IN INCH)		FINISH	OPTIONS
24	24"	A Aluminum	12EBL 90 minute 1200 Lumen Emergency
48	48"	W White	OCC Occupancy Sensor
XX	Indicate Length Squared In Inches	B Black	DS Daylight Sensor
		SP Custom	CPPFSC100 Suspended Single Canopy

\* Please contact factory for Indirect and Rectangular Applications

**DIMENSIONS**

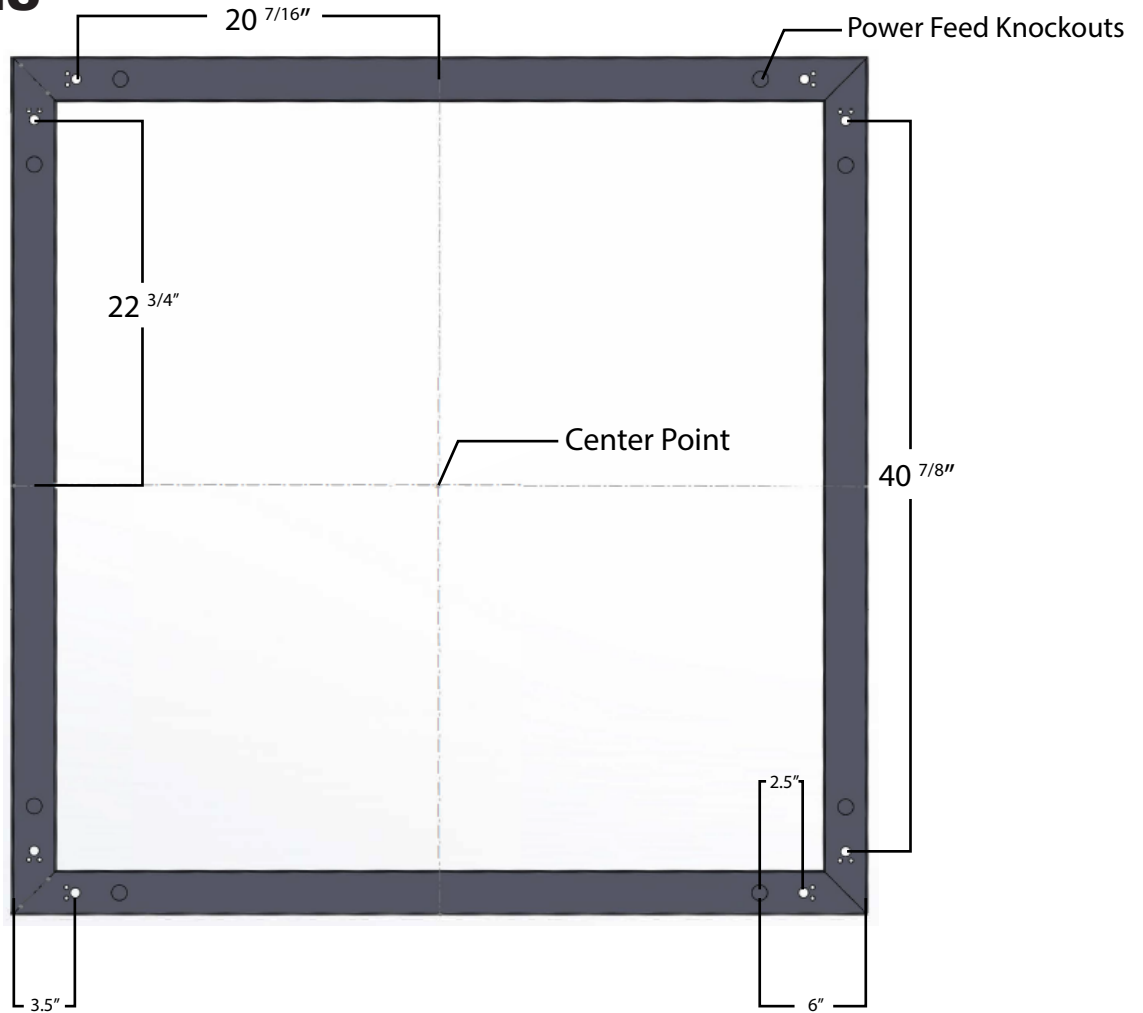

Output	Delivered Lumens	System Wattage	L70 @20C (hrs)
SL	4650	33	>100K
ML	7974	57	>100K
HL	11150	80	>100K
SM	12040	86	>100K
MM	13016	93	>100K
HM	15728	112	>100K
SH	16500	118	>100K
MH	20000	143	>100K
HH	25000	179	>100K

Approximate Color Temperature Multiplier	
5000K	1.03
4000K	1
3500K	0.97
3000K	0.94
2700K	0.91

\* Delivered Lumens shown were tested with 4000K LEDs and ASR (asymmetric/symmetric grid) lens.