

LSMF

HIGH QUALITY
SURFACE MOUNT
LUMINAIRE



The **LSMF** Series is an architecturally designed surface mount LED luminaire. The LSMF Series is available in 1x4, 2x2, and 2x4 body sizes. It was designed for standard surface mounting applications. Multiple lensing options are available, including diffusers and parabolic cubes. Driven by performance and a clean aesthetic, the LSMF is constructed from premium materials with industry leading technology. This luminaire is designed to integrate seamlessly with today's modern building management systems. The LSMF Series are designed to be high quality, energy efficient LED fixtures for use in commercial spaces, offices, government facilities, schools, and public areas.

CONSTRUCTION The fixture is constructed of a heavy gauge cold rolled steel body. Housing embossed for maximum rigidity. Rounded side flanges for safe handling. Whiter polyester powder-coat finish standard.

OPTICAL SYSTEM White polyester polymer finish with a minimum 93% reflectivity. A variety of lensing options are available for this luminaire.

ELECTRICAL SYSTEM Electronic drivers are available for 120/277V applications, 0-10v dimming driver standard. Long-life LED system rated for >100K life hours (L70 @ 45°C). Complies with federal energy efficiency standards.

MOUNTING This fixture is designed for surface mounting.

DOOR FRAME Available with an optional Vandal Resistant Door Frame.

LISTINGS ETL and cETL Listed. Damp location rated. Manufactured in the USA, BAA compliant.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.


ORDERING INFORMATION




Example: LSMF-24-40-16L-A-M

SERIES	SERIES	CCT	OUTPUT	LENS	VOLTAGE	OPTIONS
LSMF	14 1x4 22 2x2 24 2x4	30 3000K 35 3500K 40 4000K 50 5000K	2X4 2X2 1X4 2L 2000 Lumens (Low) 4L 4000 Lumens (Standard Low) 7L 7000 Lumens (Medium Low) 11L 11000 Lumens (High Low) 12L 12000 Lumens (Standard Medium) 13L 13000 Lumens (Medium Medium) 15L 15000 Lumens (High Medium) 16L 16000 Lumens (Standard High) 20L 20000 Lumens (Medium High) 25L 25000 Lumens (High High) XX Custom Lumens	A .100 #12 Acrylic A12 .125 #12 Acrylic A19 .156 #19 Acrylic 125P .125 Clear Polycarbonate 156P .156 Clear Polycarbonate S Satin Lens	M Multi-Volt (120-277VAC)	14EBL 14 Watt Emergency 2C Dual Circuit (2 Drivers) Lutron Vive attached fixture control NDF NO Doorframe VR Vandal Resistant Doorframe





Dimensions on Next Page ►

CATALOG #:
PROJECT:
TYPE:

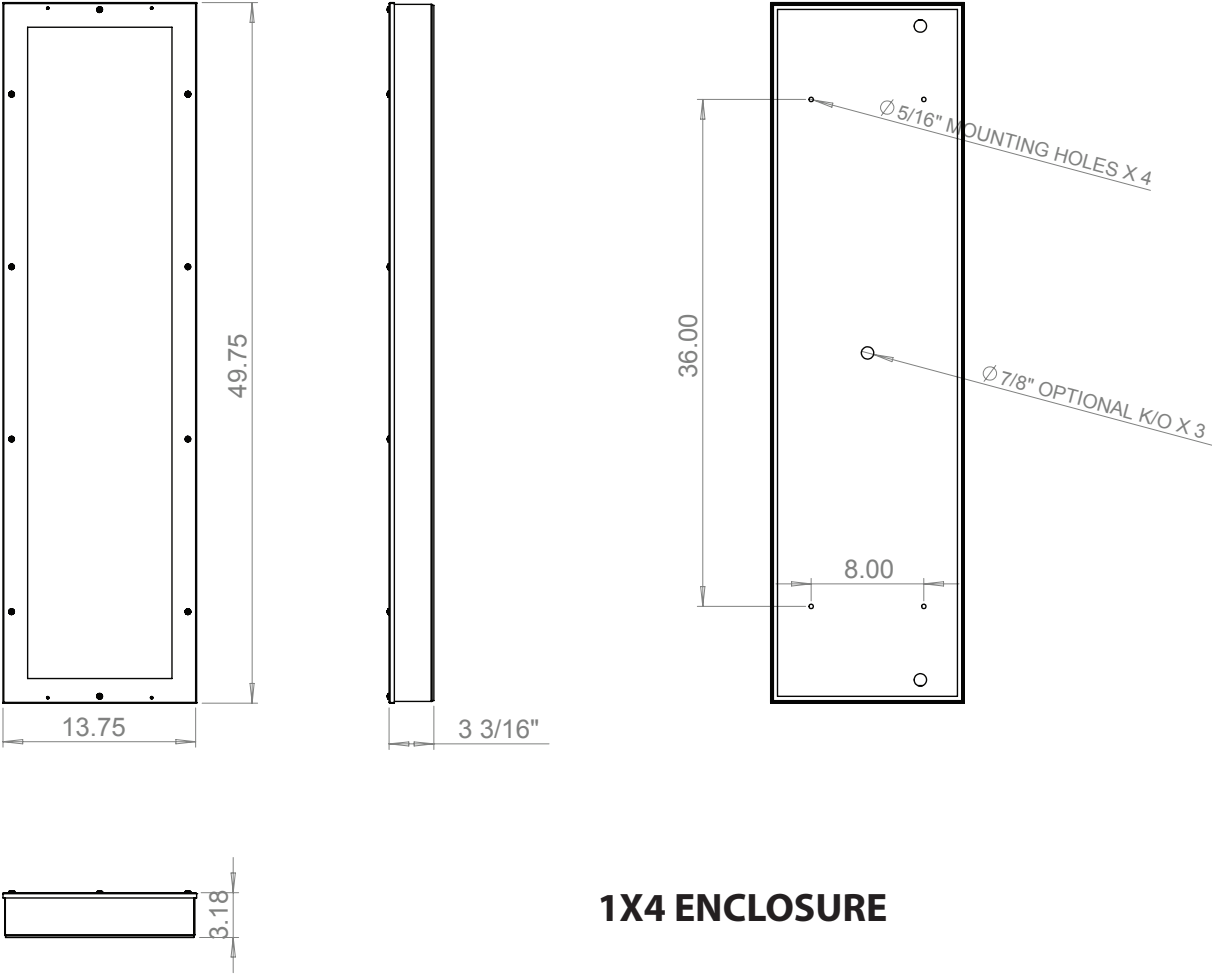

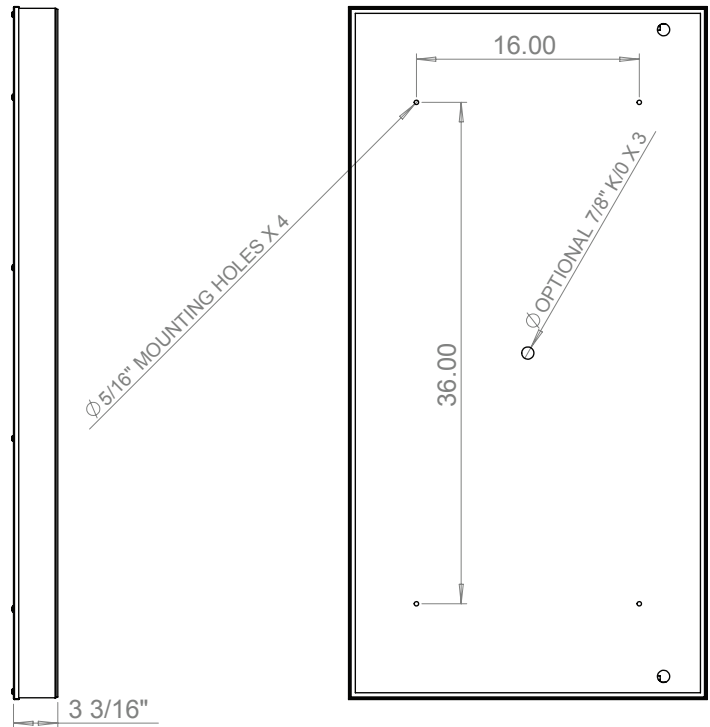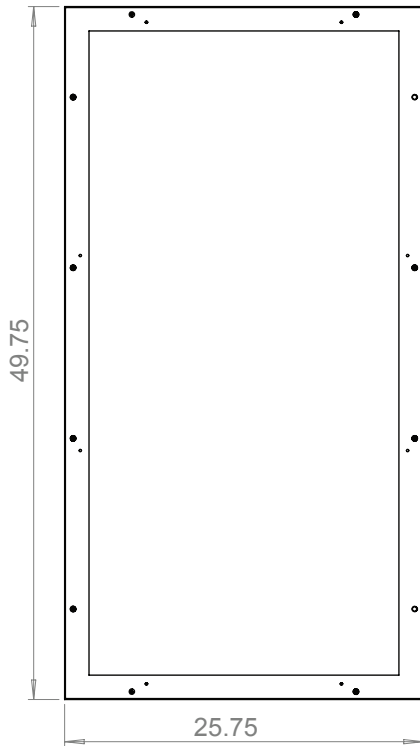

2X4 ENCLOSURE

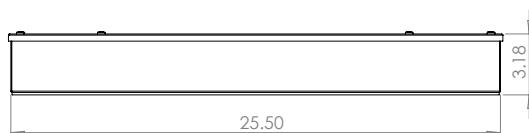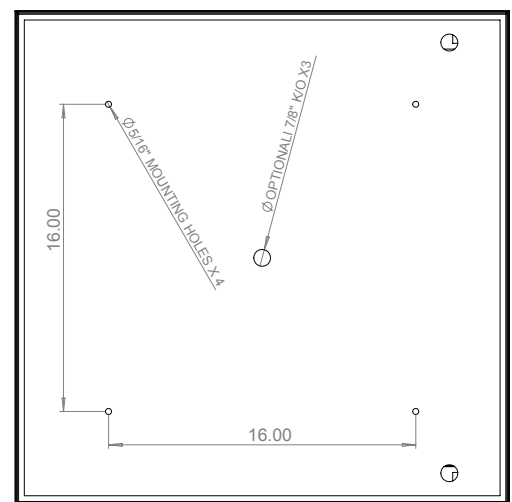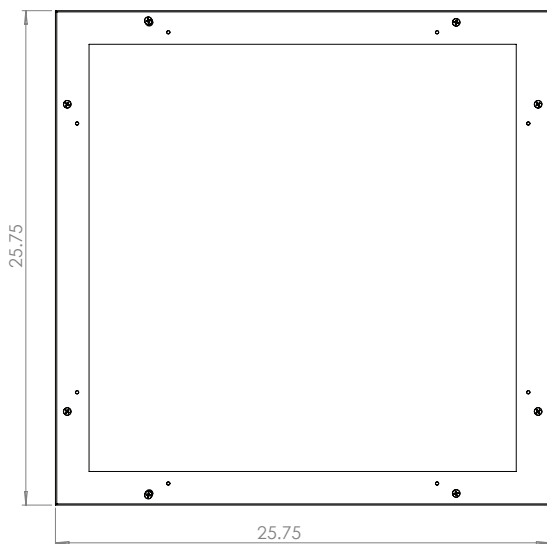

2X2 ENCLOSURE