

MEV LED RECESSED WALL MOUNT STEP-LIGHT



DESCRIPTION: The **MEV** is an LED medical grade recessed wall mount. This durable fixture is the perfect solution for areas such as hallways, restrooms, behavioral health facilities, corridors, and anywhere that needs a medical grade recessed wall mount.

CONSTRUCTION: Made from 18 gauge cold rolled steel with white powder coat finish. Faceplate made from either 18 gauge cold rolled steel or 18 gauge stainless steel.

ELECTRICAL SYSTEM: Electronic driver 0-10V dimming standard. Long-life LED system rated for >100K hours (L70 @ 25°C). Complies with federal energy efficiency

OPTICAL SYSTEM: MEV comes with a variety of lenses for any preference.

LISTINGS: ETL and cETL listed. Listed for damp locations. BAA and BABA compliant,

MOUNTING: Recessed wall mount.

LED: 80 CRI or 90 CRI LEDs available in 3000K, 3500K, 4000K, 5000K, Red, Blue, and Amber.


WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty

Ordering Example: MEV-30-S-F-B18-125P-W-M-90

SERIES	SIZE	CCT	OUTPUT (WHITE)	OUTPUT (GREEN)	OUTPUT (RED)	OUTPUT (BLUE)	OUTPUT (AMBER)	FACEPLATE
MEV	S Standard (4.25" tall) T Tall (5.75" tall) C Compact (2.5" tall)	30 3000K 35 3500K 40 4000K 50 5000K G GREEN LED R RED LED B BLUE LED A AMBER LED	XX XX Lumens, Custom Lumens from 35 to a maximum of 2000	XX XX Lumens, Custom Lumens from 35 to a maximum of 340	XX XX Lumens, Custom Lumens from 35 to a maximum of 180	XX XX Lumens, Custom Lumens from 35 to a maximum of 100	XX XX Lumens, Custom Lumens from 35 to a maximum of 600	F Full Face I Internal Louver
FACEPLATE MATERIAL	LENS	FACEPLATE FINISH	VOLTAGE	OPTIONS				
B18 Cold Roll 18 Gauge Steel SH18 Stainless Steel 18 Gauge	S Satin PA125 .125" Prismatic Acrylic #12 PHA125 .125" High Impact Prismatic Acrylic #12 125P .125" Clear Polycarbonate CTG187 .187" Clear Tempered Glass SY Symmetric Diffused DR Acrylic 125P .125" Clear Polycarbonate PP125 Prismatic Inner Lens with .125" Clear Polycarbonate Outer Lens	W Gloss White MW Matte White BRZ Bronze N Nickel SP Special	M Multi-Volt (120-277V)	AM Anti-Microbial Paint LDE1 Lutron Hi-lume 1% Ecosystem LED driver with Soft-on, Fade-To-Black Dimming Driver LDE5 Lutron LDE5 5-Series Ecosystem 5% Dimming Driver 90 90 CRI				

DIMENSIONS

FRONT VIEW

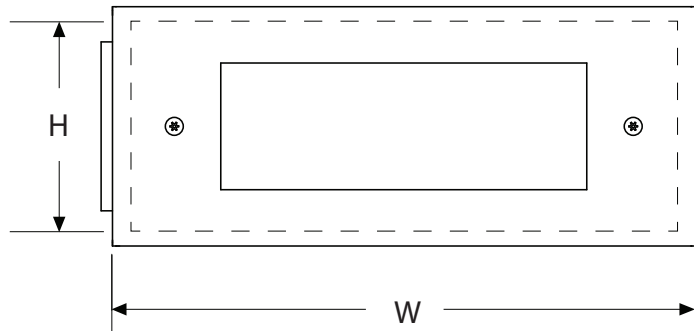

	H	W
MEV	4.25	10.35
MEVT	5.75	10.35
MEVC	2.5	10.35

OUTPUT	EST. LUMENS WHITE	EST. LUMENS R/B/A	WATTAGE
S	35	30	.25
M	75	64	.45
H	100	86	.72