

# Advantage Environmental Lighting

## NYX10

New York Approved Recessed Aluminum LED Edgelit Exit



STANDARD

OPTIONAL



### ILLUMINATION

- Ultra-bright, energy efficient, long-life Red LED.
- UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- NY compliant 8" Exit letters.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.

### HOUSING

- Premium-grade, extruded aluminum housing.
- Extruded Aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance, also available in black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.


### OPTIONS

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

### DIMENSIONS

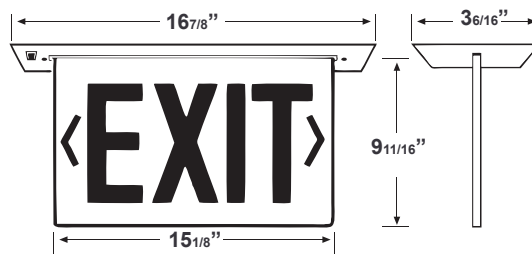

### ORDERING INFORMATION

Sample Part Number: NYX10-1-R-C-A-EM

Model	No. of faces	Letter	Panel	Housing	Battery	Options
NYX10	1 Single Face	R Red	C Clear*	W White	Blank AC Only	SDT Self-diagnostics
	2 Double Face		M Mirror	B Black	EM Battery Backup	
			W White	A Aluminum		

\*With single face only.



# NYX10 New York Approved Recessed Aluminum LED Edgelit Exit

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
NYRELZXTE/EM	4.2	4.2	0.030	0.020