

Catalog Number
Project
Type

## NYX7

### Die-Cast Aluminum New York Approved LED Exit Sign



#### ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

#### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

#### HOUSING

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field. • Quick-snap face plate closure.

#### STANDARD



#### OPTIONAL



#### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

#### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

#### ORDERING INFORMATION

Sample Part Number: **NYX71RBAEM**

Special voltage options available. Check with your Best Lighting Representative.

<sup>1</sup> Available only with EM units.


<sup>2</sup> Available only with AC units.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	FACE PANEL	BATTERY	OPTIONS	
NYX7	1	Single Face	R Red	W White	W White	(blank) AC-Only	SDT Self-Diagnostics <sup>1</sup>
	2	Double Face	G Green	B Black	B Black	EM Battery Backup	2C Dual Circuit Operation <sup>2</sup>
	3	Universal Single/Double Face		A Aluminum	A Aluminum		TP Tamper-Proof USA Assembled In USA

# NYX7

## Die-Cast Aluminum New York Approved LED Exit Sign

### DIMENSIONS

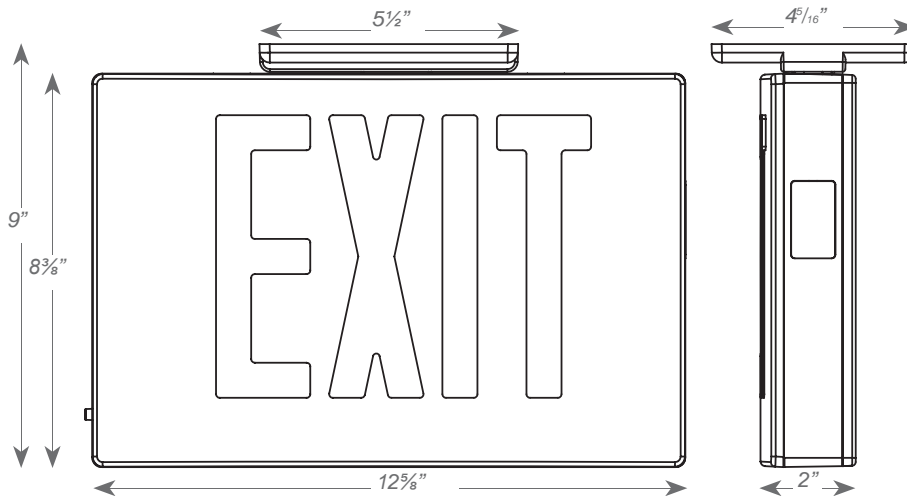

### ELECTRICAL INFORMATION

Input Watts (W)		Input Amps (A)	
120V	277V	120V	277V
3.8	4.5	0.030	0.020