

RSQB


ROUND AND SQUARE BOLLARDS



MODEL	L	W/Ø	H	Weight (lbs)
RSQB-S	6	6	42	12
RSQB-R	6	6	42	15
RSQB-RD	6	6	44	12
RSQB-RL	6	6	44	13



Round

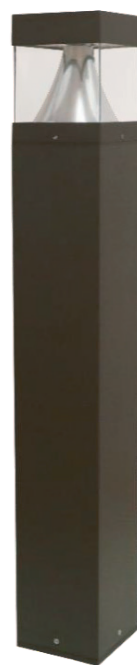

Square



Round
Louvered



Round
Dome

These new and attractive bollards feature options such as user selectable CCT (3000k-warm white 4000k-neutral white, and 5000k-cool white), a choice between black and bronze finishes, and choice between 2000 and 3000 lumens.

CONSTRUCTION: Cast aluminum housing with choice of dark bronze or black powder coat finish. High-impact, polycarbonate lens. Easy installation in new construction or retrofit applications.

ELECTRICAL: Universal 120-277 AC voltage (50-60Hz) is standard. Power factor > 0.90. Total harmonic distortion < 20%. Color rendering index (Ra) > 80. Surge protection = 4kV. Provides a range of 905 to 3,296 nominal lumens and 69 to 148 nominal lumens per watt (lm/W). 0-10vdc dimming drivers, are standard. Long-life LEDs provide at least 70% of initial lumen output (L70) for > 163,000 hours of operation, and at least 90% of initial lumen output (L90) for > 50,000 hours of operation.

WARRANTY & LISTINGS: cULus listed for wet locations in ambient temperatures from -40°C to 55°C (-40°F to 131°F). IP65 rated for ingress protection. DLC premium approved. Complies with FCC Part 15, class A. L 70 & L 90 hours are IES TM-21-11 calculated hours. 5-year warranty of all electronics and housing.

ORDERING INFORMATION. Example: RSQB-R-3-ABR

SERIES	STYLE	CCT	OUTPUT	MOUNTING
RSQB	R Round S Square RD Round Dome RL Round Dome w/Louvers	User Selectable	3 3000 Lumens 4 4000 Lumens	ABR Anchor bolt for round bollards ABS Anchor bolt for square bollards

