

# SLH

**OUTDOOR SIGN LIGHTER 3/4" HUB**  
**(WET LOCATION FOR DOWNLIGHT ONLY)**



**DESCRIPTION:** Our **SLH** Outdoor Sign Lighter specification-grade fixture rotates up to 90°. This durable fixture is ideal for applications that include parking and commercial / retail outdoor areas for sign and walkway lighting, specifically for mounting in a downward orientation for downlighting purposes. 3/4" hub.

**CONSTRUCTION:** Comes standard with powder-coated white aluminum extrusion with white reflector and cast-aluminum end plates, but custom finishes are available. The diffuser/lens is a smooth clear acrylic. Available in 4 and 8 foot nominal lengths.

**MOUNTING:** Fixtures are typically mounted on conduit. Downlight only.

**OPTICAL:** Multiple Kelvin temperatures (3000K, 3500K, 4000K, 5000K); consult factory for RGBW option. Multiple lumen packages/wattages available through use of programmable drivers.

**ELECTRICAL SYSTEM:** CRI >80 standard. L70: >50,000 Hours. Dimming: 0-10V 120-277V standard, 120V ELV/TRIAC optional.

**LISTINGS:** ETL listed. Suitable for wet locations (IP65, downlight only)



**WARRANTY:** 5-Year Limited Warranty. Complete warranty and terms located at [www.aelnow.com/warranty](http://www.aelnow.com/warranty).

**ORDERING INFORMATION. Example: SLH-48-40-57-DMV-GW**

SERIES	SIZE	CCT	WATTAGE/LUMENS	DRIVERS	FINISH	OPTIONS
SLH	48 48" 96 96"	30 3000K 35 3500K 40 4000K 50 5000K	48 48 Watts / 5900 Lumens 57 57 Watts / 6500 Lumens 96 96 Watts / 11,800 Lumens 114 114 Watts / 13,000 Lumens	DMV 0-10V Dimming G120 ELV/TRIAC Dimming at 120V ONLY D1MV 0-10V Dimming (dim to 1%)	Blank Standard White / Natural Ends GW Gloss White BZ Bronze SL Silver MB Matte black GB Gloss black	DMX Addressable DMX Decoder for DMX512 Control (Controller Supplied by Others). Consult factory for requirements.





## DIMENSIONS

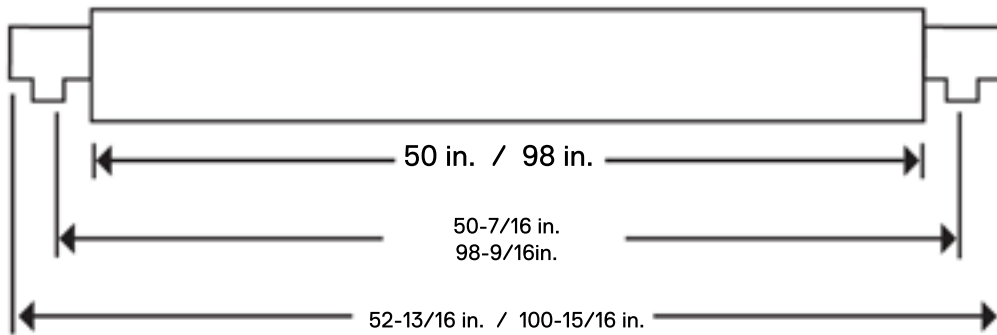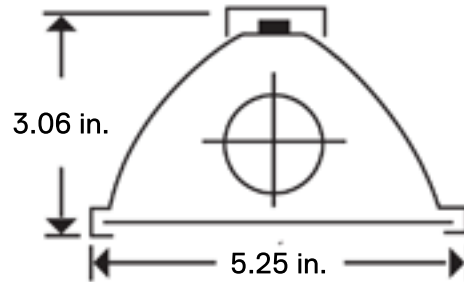

### DIMENSIONS

4 ft. - 52.81"L x 5.25"W x 3.06"H  
8 ft. - 100.94"L x 5.25"W x 3.06"H

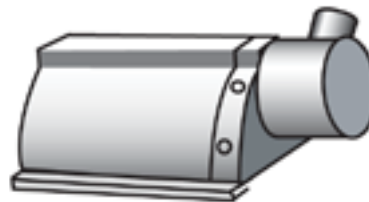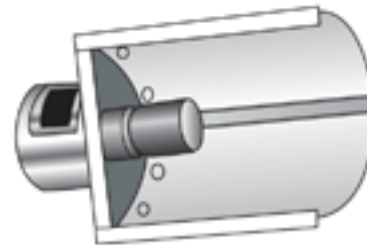

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.