


XDL24DWL

2.5" X 4.5" LINEAR SUSPENDED
WET LOCATION

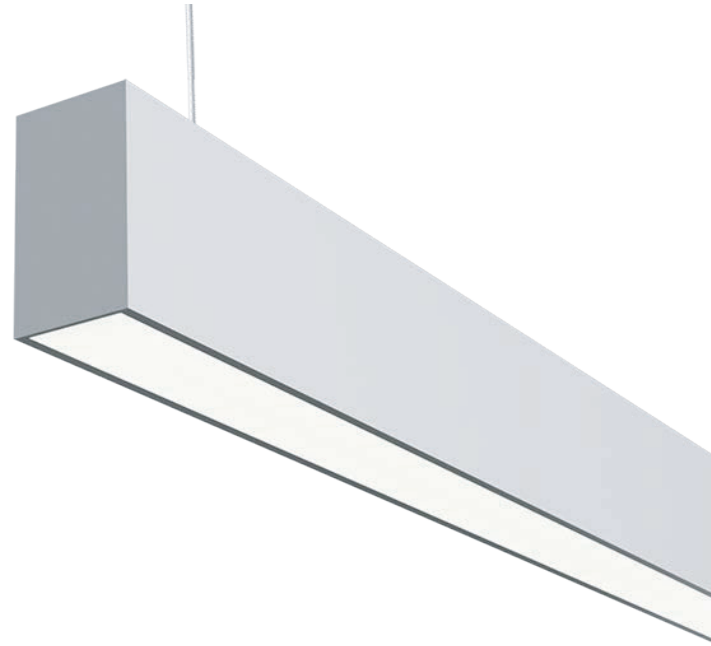

The **XDL24DWL** is a suspended, LED linear fixture, designed with quality craftsmanship, and engineered for quick and easy tool-less installation. The XDL series provides clean lines, smooth continuous runs, and tight lens fitment. Available in continuous runs and custom angles and lengths. Constructed of a precision cut, proprietary aluminum extrusion with flat end caps. Internal joiner system. Available in any length with a 1' minimum.

MOUNTING Designed for suspension mounting. Adjustable sliding mounting plate on the top of the fixture tightens down with a thumb-turn, allowing for quick and even fixture suspension.

LEDS High Output LEDs are available in 2700K, 3000K, 3500K, 4000K, and 5000K color temperatures. Integral LEDs are rated for at least 100K life hours (L70).

OPTICS Snap-in satin acrylic lens fully diffuses the appearance of the LEDs and provides excellent light transmission.

DRIVER 0-10V dimming driver included standard. Driver options available for 1% dimming, Lutron EcoSystem, and DALI.

FINISH Matte white finish standard. Custom finish options are available in various RAL colors.

OPTIONS Various options are available. If hanging canopies are ordered, one power feed and one nonpower feed per fixture should be ordered. If additional or custom options are needed, consult factory.

LISTINGS: ETL and cETL listed. BABA and BAA compliant. NSF compliant.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.


Ordering Information and Dimensions on Next Page ►

ORDERING INFORMATION. Example: XDL24DWL-4-40-10L-CP50-W-M

SERIES	LENGTH	CCT	OUTPUT	LENS	VOLTAGE	FINISH	DRIVER OPTIONS
XDL24DWL	2 2 ft.	27 2700K	5L 500 lm/ft	S Satin Lens	M Multi-Volt (120-277V)	MB Matte Black	(BLANK) 0-10V 10% dimming driver
	3 3 ft.	30 3000K	7L 700 lm/ft			MW Matte White	CD1 0-10V 1% dimming driver
	4 4 ft.	35 3500K	10L 1000 lm/ft			GB Gloss Black	CD5 0-10V 5% dimming driver
	5 5 ft.	40 4000K	125L 1250 lm/ft			GW Gloss White	EDN Non-dimming electronic driver
	6 6 ft.	50 5000K	XXXL XXX lm/ft			SP Special Finish	LDE1 Lutron Hi-Lume 1% EcoSystem LED Driver
	7 7 ft.						
	8 8 ft.						
	XX XX ft.						


OPTIONS	HANGING OPTIONS
14EBL 14 Watt Emergency Ballast	CPPF100 Cord Pendant (Power Feed Capable) 100" (8.25 feet)
FW Flex Whip Cable 6'	CP100 Cord Pendant (No Power Feed) 100" (8.25 feet)
VDO Lutron Vive Integral fixture control (RF with Daylight and Occupancy Sensing)	CPPF150 Cord Pendant (Power Feed Capable) 150" (12.5 feet)
RGBW Addressable DMX Decoder for DMX512 Control (Controller Supplied by Others). Consult factory for requirements.	CPP150 Cord Pendant (No Power Feed) 150" (12.5 feet)
	CPFX100-5W 5-Wire Cord Pendant (Power Feed) 100" (8.25 feet)
	RPXX Rigid Pendant (Power Feed Capable) - Specify Length (XX)

Consult factory for custom suspension lengths

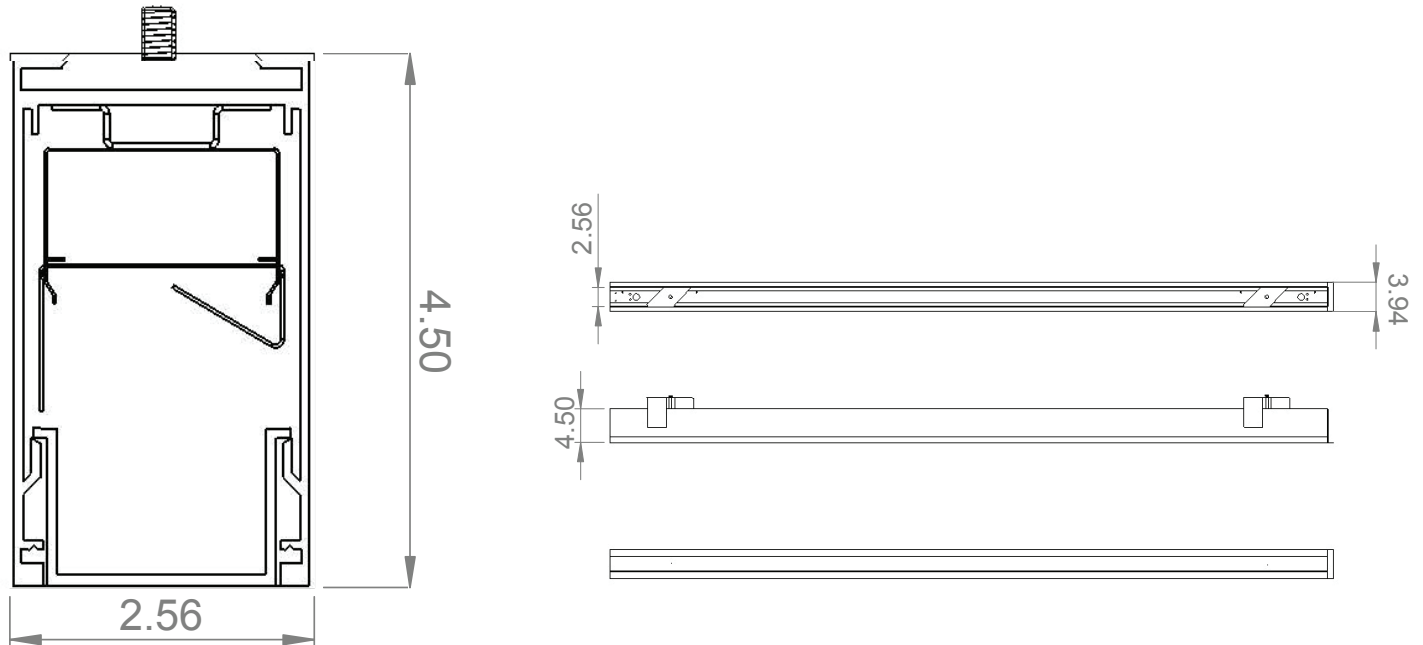


HANGING OPTIONS

CP

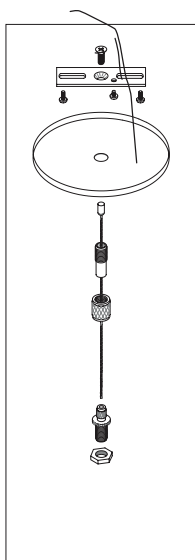


**Cord Pendant
(No Power Feed)**

CPPF

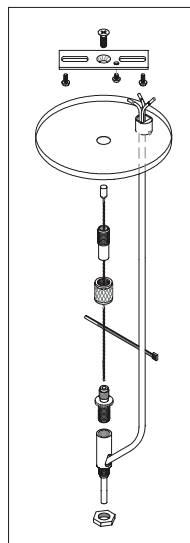

**Cord Pendant
(Power Feed Capable)**

RP

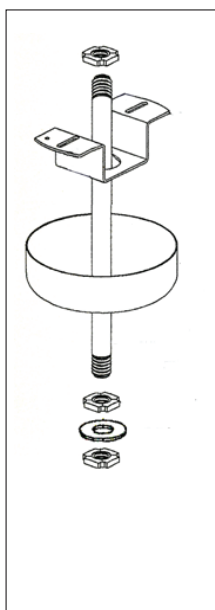

**Rigid Pendant
(Power Feed Capable)**