

WALL MOUNT

XDL24WM

2.5" X 4.5" LINEAR



The XDL24WM is an LED linear wall mount fixture, design with quality craftsmanship. Engineered for quick and easy tool-less installation. The XDL series provides clean lines, smooth continuous runs, and tight lens fitment. Available in continuous runs and custom angles and lengths.

CONSTRUCTION: Constructed of a precision cut, proprietary aluminum extrusion with flat end caps. Internal joiner system. Available in any length with a 2' minimum.

MOUNTING: 2 piece wall innovative wall mounting system allows for quick and easy mounting.

LEDs: High Output LEDs are available in 2700K, 3000K, 3500K, 4000K, and 5000K color temperatures. Integral LEDs are rated for at least 100K life hours (L70).

OPTICS: Snap-in satin acrylic lens fully diffuses the appearance of the LEDs and provides excellent light transmission.

DRIVER: 0-10V dimming driver included standard. Driver options available for 1% dimming, Lutron EcoSystem, and DALI.

LIGHTING CONTROLLERS: Our standard controllers are DMX and Casambi, but we can integrate almost any controller system.

FINISH: Matte white finish standard. Custom finish options are available in various RAL colors.

OPTIONS: Various options are available. If additional or custom colors are needed contact factory.

LISTINGS: ETL and cETL listed. BABA and BAA compliant.


WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

Ordering Information on Next Page ►

ORDERING INFORMATION. Example: XDL24WM-4-40-7L-M-MB-90

SERIES	LENGTH	CCT	OUTPUT	VOLTAGE	FINISH	OPTIONS
XDL24WM	2 2 ft.	30 3000K	5L 500 lm/ft	M Multi-Volt (120-277V)	MB Matte Black	14EBL 14 Watt Emergency Ballast
	3 3 ft.	35 3500K	7L 700 lm/ft		MW Matte White	EC Emergency Circuit
	4 4 ft.	40 4000K	10L 1000 lm/ft		GB Gloss Black	90 90 CRI
	5 5 ft.	50 5000K	14L 1400 lm/ft		GW Gloss White	AM Anti-Microbial White Paint
	6 6 ft.		XXXL XXX lm/ft		SP Special Finish	RGBW Addressable DMX Decoder for DMX512 Control (Controller Supplied by Others). Consult factory for requirements.*
	7 7 ft.					CSM CASAMBI dimming driver for wireless control.*
	8 8 ft.					
	XX XX ft.					

*A wide range of other controllers are available.
Consult with factory for more details.

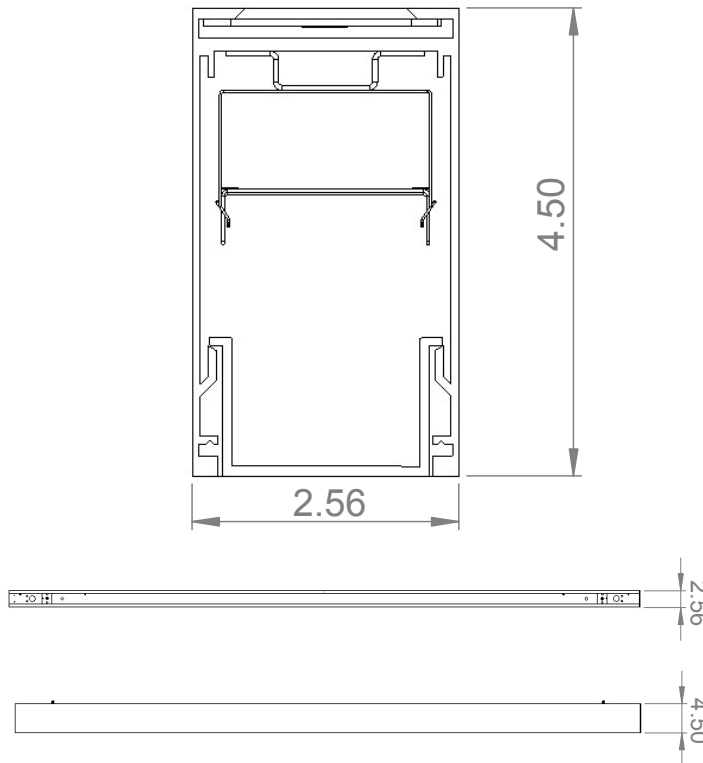

LED Information

Output	5L	7L	10L	14L
Lumens/Ft*	500	700	1000	1400
System Wattage/Ft	3.125W	4.375W	6.25W	8.75W
Efficacy (Lm/W)	160	160	160	160
CRI	>82	>82	>82	>82
Dimming	0-10V	0-10V	0-10V	0-10V
Color Consistency	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM
Rated Life (L70)	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs

* Lumen output was calculated with 4000K LEDs.

Lumen Adjustment Factors 80 CRI

CCT	2700K	3000K	3500K	4000K	5000K
Adjustment	93.5%	95.2%	96.8%	100.0%	103.0%

Lumen Adjustment Factors 90 CRI

CCT	2700K	3000K	3500K	4000K	5000K
Adjustment	77.5%	79.2%	80.8%	85.1%	87.3%