


RECESSED XDL4RWW 4.0" X 4.5" LINEAR WALL WASH

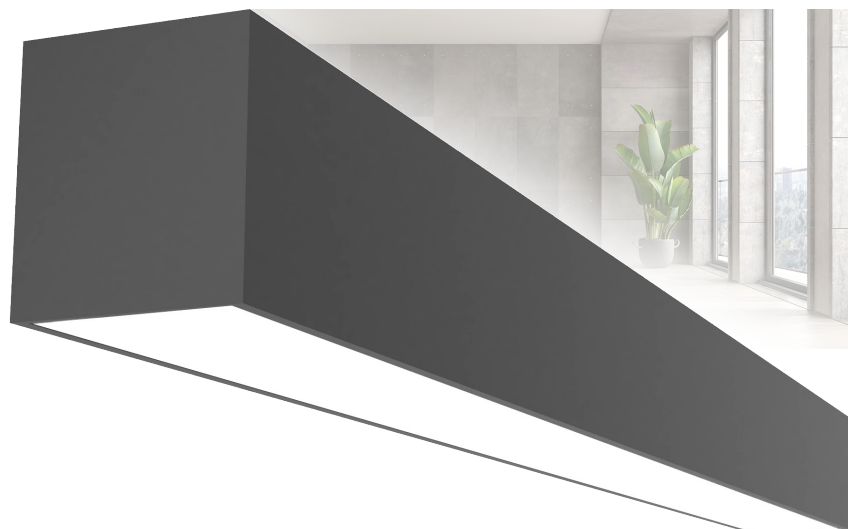

The **XDL4RWW** is a recessed LED linear wall wash fixture, designed with quality craftsmanship and beautifully finished. The XDL series provides clean lines, smooth continuous runs, and tight lens fitment. Available in continuous runs and custom angles and lengths.

CONSTRUCTION: Constructed of a precision cut, proprietary aluminum extrusion with flat end caps. Internal joiner system. Available in any length with a 1' minimum. Angled wall wash reflector.

MOUNTING: Lay-in grid fixtures fit 9/16 and 15/16 standard T-grids. Flanged mounting and flangeless trim mounting options include innovative top mount bracket to support the fixture.

LEDs: High Output LEDs are available in 2700K, 3000K, 3500K, 4000K, and 5000K color temperatures. Integral LEDs are rated for at least 100K life hours (L70).

OPTICS: Snap-in satin acrylic lens fully diffuses the appearance of the LEDs and provides excellent light transmission. Driver 0-10V dimming driver included standard.

DRIVER: Options available for 1% dimming, Lutron EcoSystem, and more.

FINISH: Matte white finish standard. Custom finish options are available in various RAL colors.

OPTIONS: Various options are available. If additional or custom options are needed, consult factory.

LISTINGS: BAA and BABA compliant. Designed and manufactured in the USA. ETL listed. Design conforms to the basic requirements of NSF.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty


Ordering Information and Dimensions on Next Page ►

ORDERING INFORMATION

Example: XDL4RWW-40-10L-L-W-4-M

SERIES	CCT	OUTPUT	MOUNTING	FINISH	HOUSING	DRIVER
XDL4RWW	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	5L 500 lm/ft. 7L 700 lm/ft. 10L 1000 lm/ft. 14L 1400 lm/ft. XXXL Custom lm/ft.	L Lay-in Grid F Flange FT Flangless Trim	MB Matte Black W White GB Gloss Black GW Gloss White SP Special Finish	2 2 ft. 3 3 ft. 4 4 ft. 5 5 ft. 6 6 ft. 7 7ft. 8 8 ft. XX Custom fit.	(BLANK) 0-10V 10% dimming driver CD1 0-10V 1% dimming driver CD5 0-10V 5% dimming driver EDN Non-dimming electronic driver DALI DALI 1% dimming driver LDE1 Lutron Hi-Lume 1% EcoSystem LED Driver

VOLTAGE	OPTIONS
	14EBL 14 Watt Lumen Emergency Ballast
	90 90 CRI
	90D 90 Degree Turn
	90V 90 Degree Ceiling-to-Wall
	XXD XX Degree turn (90 to 60 degrees)
	DMX Addressable DMX Decoder for DMX512 Control (Controller Supplied by Others). Consult factory for requirements.

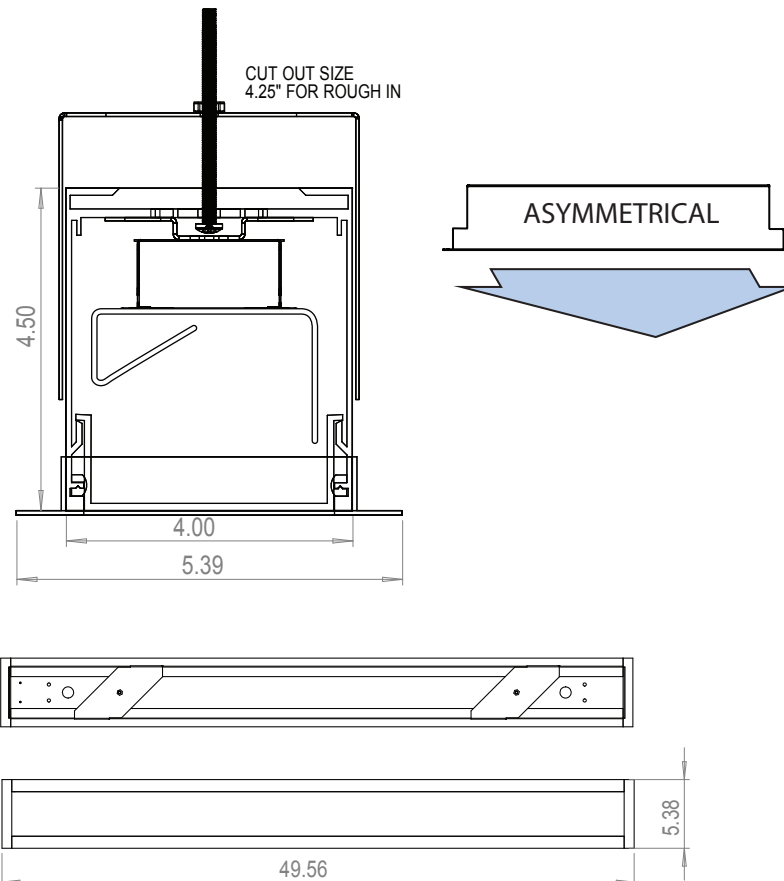

CATALOG #:
PROJECT:
TYPE:

OUTPUT CHART

OUTPUT	5L	7L	10L	14L	20L	25L
Lumens/Ft*	500	700	1000	1400	2000	2500
System Wattage/Ft	3.125W	4.375W	6.25W	8.75W	12.0W	13.9W
Efficacy (Lm/W)	160	160	160	160	160	160
CRI	>82	>82	>82	>82	>82	>82
Dimming	0-10V	0-10V	0-10V	0-10V	0-10V	0-10V
Color Consistency	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM	>3 SDCM
Rated Life (L70)	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs

*Lumen output was calculated with 4000K LEDs.

