

SURFACE MOUNT, WET LOCATION

XDL4SMWL

4.0" X 4.5" LINEAR



The **XDL4SMWL** is an LED linear wet location surface mount fixture, design with quality craftsmanship. The XDL series provides clean lines, smooth continuous runs, and tight lens fitment. Available in continuous runs and custom angles and lengths.

CONSTRUCTION Constructed of a precision cut, proprietary aluminum extrusion with flat end caps. Internal joiner system. Available in any length with a 2' minimum. Custom gaskets seal the fixture to make a wet location rated linear fixture. Releasing the clips drops and holds the board tray, allowing quick, tool-less, and easy wiring of the fixture.

MOUNTING Surface mounting conduit plate included with fixture. Fixture mounts to surface using included hardware.

LEDS High Output LEDs are available in 2700K, 3000K, 3500K, 4000K, and 5000K color temperatures. Integral LEDs are rated for at least 100K life hours (L70).

OPTICS Snap-in satin acrylic lens fully diffuses the appearance of the LEDs and provides excellent light transmission.

DRIVER 0-10V dimming driver included standard. Driver options available for 1% dimming, Lutron EcoSystem, and DALI.

FINISH Matte white finish standard. Custom finish options are available in various RAL colors.

OPTIONS Various options are available. If hanging canopies are ordered, one power feed and one nonpower feed per fixture should be ordered. Listings ETL and cETL listed. RoHS compliant. Suitable for wet locations.

WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty

Ordering Information and Dimensions on Next Page ►

ORDERING INFORMATION

Example: XDL4SMWL-35-9L-M-BK-40

SERIES	CCT	OUTPUT	VOLTAGE	FINISH	HOUSING	DRIVER
XDL4SMWL	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	5L 500 lm/ft. 7L 700 lm/ft. 9L 900 lm/ft. 10L 1000 lm/ft. 14L 1400 lm/ft. XXXL Custom lm/ft.	M Multi-Volt (120-277VAC)	MB Matte Black MW Matte White GB Gloss Black GW Gloss White SP Special Finish	2 2 ft. 3 3 ft. 4 4 ft. 5 5 ft. 6 6 ft. 7 7ft. 8 8 ft. XX Custom fit.	(BLANK) 0-10V 10% dimming driver CD1 0-10V 1% dimming driver CD5 0-10V 5% dimming driver EDN Non-dimming electronic driver DALI DALI 1% dimming driver LDE1 Lutron Hi-Lume 1% EcoSystem LED Driver





OPTIONS

14EBL	14 WattEmergency Ballast
FW	6' Flex Whip Cable
90	90 CRI
OC4EX	Occupancy Sensor
WW	Wall Wash
DMX	Addressable DMX Decoder for DMX512 Control (Controller Supplied by Others). Consult factory for requirements.



DIMENSIONS

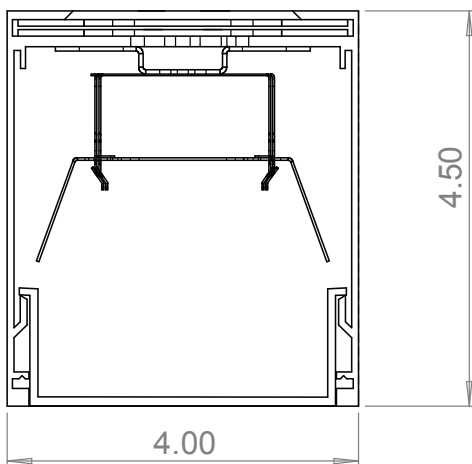

WALL WASH OPTION

