


XPF

PENDANT/CEILING MOUNT
HAZARDOUS
LOCATION LED
LUMINAIRE

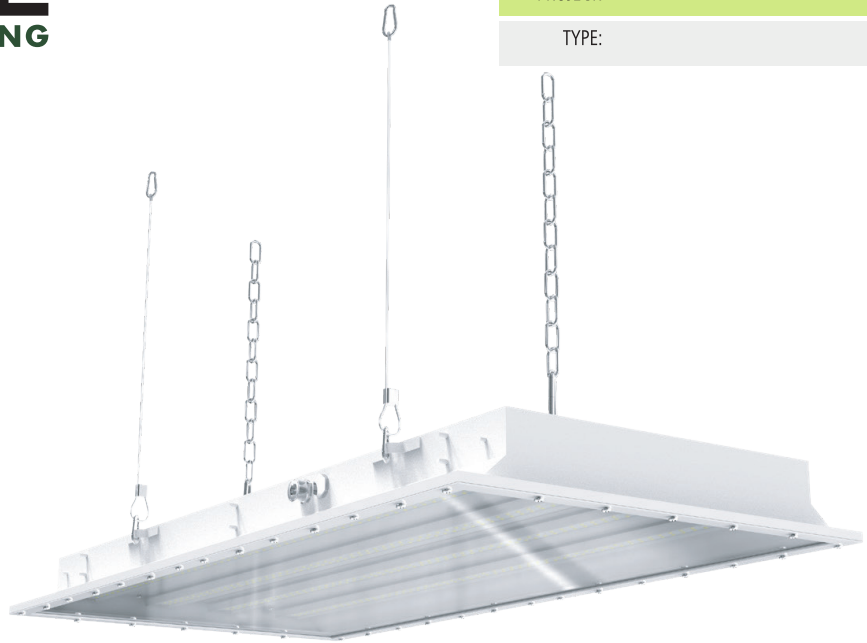

Our XPF series LED linear luminaires are designed to provide ideal illumination in the harshest environments, also suitable for marine applications. Available in four common sizes, it is certified for use in Class I, Division 2 and Zone 2 locations and others made hazardous by the presence of flammable vapors or gases or combustible dusts.

CONSTRUCTION: Corrosive resistant, 304 stainless steel body with high-quality powder-coating is standard. Stainless steel hardware.

OPTICS: PC/Glass (Notice: Glass diffuser comes with wire guard part for safety).

BEAM ANGLE: 120 degrees.

ELECTRICAL SYSTEM: High luminous efficacy - Up to 130 lumens per watt, and 0-10V dimming is standard. LED lumen Maintenance: L70> 150,000 Operation Hours @ 55°C. CRI 70, and 5000K CCT. AC120-277V/AC200-480V (Class I, Division 2); AC100-277V (Zone 2/22). Over-voltage, over-current and short-circuit protection.

LISTINGS: Approved to CSA, ETL AND UL standards. UL 844 Hazardous Locations Class I Division 2, Groups A, B, C, D Class I, Zone 2, Group IIA, IIB, IIC UL 1598 Wet Locations IUL 924 Emergency Lighting, ETL, IP66/IK10 rating with wire guard. IECEx Certificate number: IECEx CSAE 21.0013X Ex db ec IIC T6/T5/T4 Gc Ex tc IIIC T80°C/T95°C/T100°C Dc ATEX Certificate number: CSANe 23ATEX1213X II 3GD Ex db ec IIC T6/T5/T4 Gc Ex tc IIIC T80°C/T95°C/T100°C Dc.

OPERATING TEMPERATURES: for Class I, Division 2: T4/T100°C -40°C to +60°C. Normal for Zone 2: T6/T80°C -40°C to +45°C, T5/T95°C -40°C to +55°C, T4/T100°C -40°C to +60°C.

MOUNTING: Ceiling or pendant mounting.


WARRANTY: 5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.



XPF-12



XPF-22



XPF-14



XPF-24

Ordering info on Next Page ►



A CLASS I, DIVISION 2 hazardous location is an area where flammable gases or vapors are normally confined in closed systems or prevented by mechanical ventilation, but could be present in ignitable concentrations during accidental or abnormal conditions



ZONE 2/21/22 hazardous locations refer to areas within an industrial facility where explosive atmospheres, either from gases or dust, are present, but with a medium to low likelihood of occurring.

Example: XPF-14-50-304-C-50-Y-CM

SERIES	BODY (SIZE)	WATTAGE/LUMENS			HOUSING		CLASS	CCT	DIMMING	
XPF	12 1'x2'	24 (2x4) 22 (2x2) 11 (14) 12 (1x2)	15 15W	1950lm	Blank	Cold Rolled Steel (standard)	C Class I Division 2	50 5000K Factory Preset	Y Yes	
	14 1'x4'		20 20W	2600lm	304	304 Stainless Steel (3)	Z Zone 2/21/22		N No	
	22 2'x2'		25 25W	3250lm	316	316 Stainless Steel (3)				
	24 2'x4'		30 30W	3900lm	ALH	6063 Aluminum (3)		User selectable CCT order via special order (4)		
			35 35W	4550lm						
			40 40W	5200lm						
			50 50W	6500lm						
			60 60W	7800lm						
			70 70W	9100lm						
			80 80W	10800lm						
			90 90W	11700lm						
			100 100W	13000lm						
			120 120W	15600lm						
			150 150W	19500lm						
			180 180W	23400lm						
			200 200W	26000lm						

OPTIONS

WG	Wire Guard (1)
EMB	Emergency battery (90 minutes)
CM	Ceiling Mounting Kit
PM	Pendant Mounting Kit


SEE LAST PAGE
FOR KIT EXAMPLES

NOTES: (1) Includes glass diffuser, required for IK10. (2) In-stock lights are preset at 5000k CCT and not user adjustable. (3) Special Order only. In-stock lights are preset at 5000k CCT and not user adjustable. Special order lights have a 90-day lead time and have user selectable CCT and wattage. (4) Special Order only. Special order lights have a 90-day lead time and have user selectable CCT and wattage.


Dimensions on Next Page ►

DIMENSIONS:


XPF-12

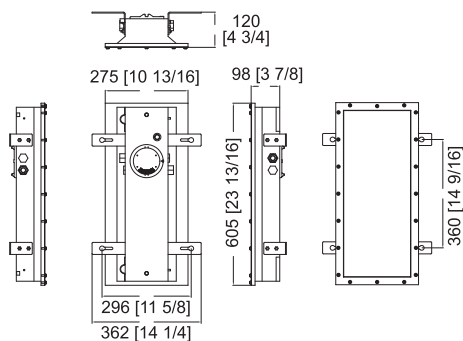


XPF-22

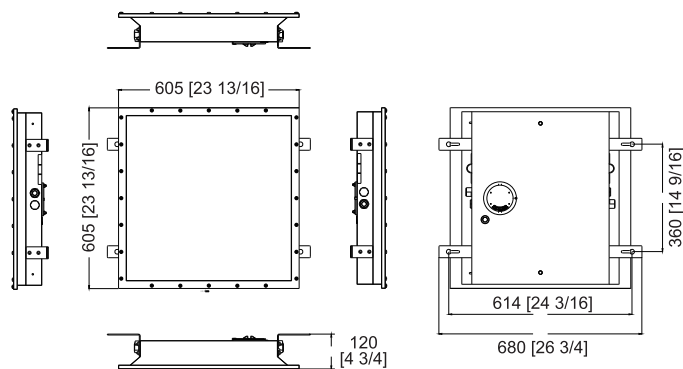

XPF-14

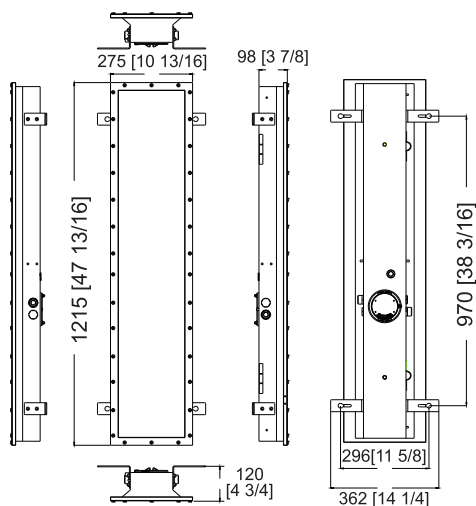

XPF-24

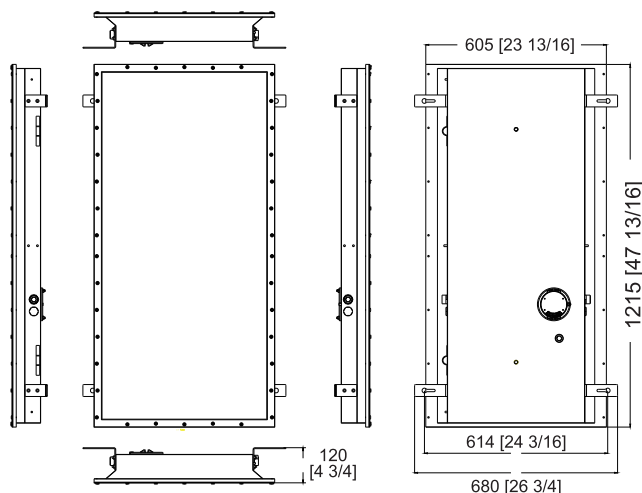

PACKING INFORMATION


Model	Product Dimensions	Gross Weight	Quantity/Carton	Package Dimensions (LxWxH)
XPF-12	605x275x120mm/ 23.8x10.8x4.7inch	9kg/19.8lb	1 pc	700x350x175mm/27.6x13.8x6.9inch
XPF-14	275x1215x120mm/1.8x47.8x4.7inch	20kg/44lb	1 pc	1320x350x175mm/52x13.8x6.9inch
XPF-22	605x605x120mm/23.8x23.8x4.7inch	21kg/46.3lb	1 pc	700x680x175mm/27.6x26.8x6.9inch
XPF-24	605x1215x120mm/23.8x47.8x4.7inch	30kg/66.1lb	1 pc	1320x680x175mm/52x26.8x6.9inch

Option Examples on Next Page ►



OPTION EXAMPLES:

Option Kit: **PM**

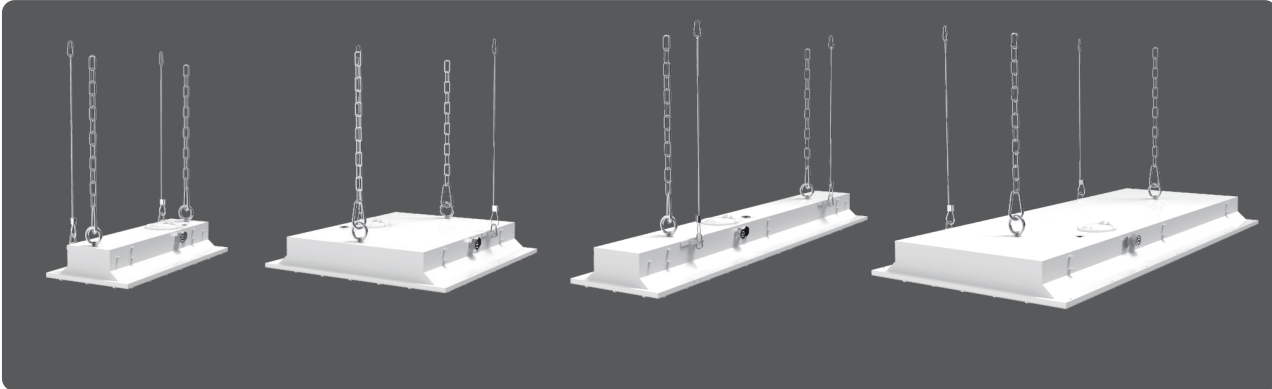

Lifting Ring




Hanging Chain



Safety Rope

Option Kit: **CM**

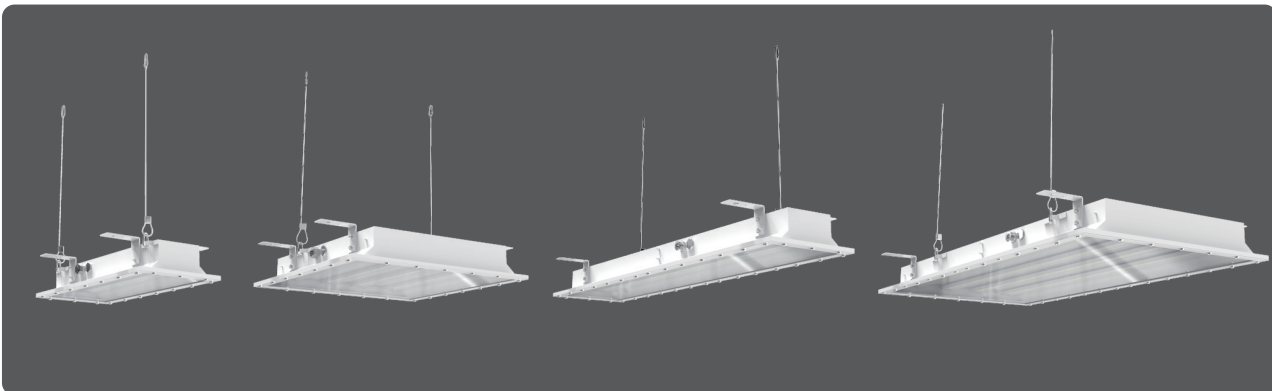

Ceiling Mount Bracket



Safety Rope