


The LSR comes pre-wired with LED driver and boards to your specification. The LSR ships as a kit with required mounting screws, and is ready to plug and play.

1. Remove all components (ballasts, socket bars, etc) from the existing strip that will be retrofitted, leaving only the power disconnect.



2. Quick Connect the LSR retrofit to the old strip's disconnect, and place the LSR over the strip housing.

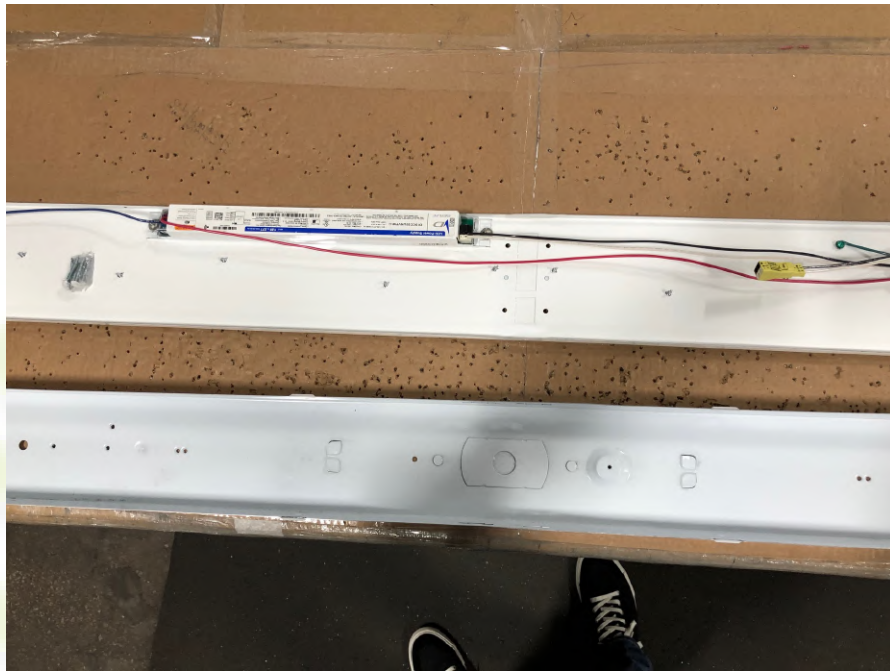

3. Use 3 mounting screws per side (for both 4' and 8' fixtures), and attach the LSR to the strip housing. Enjoy your new LED strip retrofit!

