

CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!



**WARNING: Before beginning installation, disconnect electrical power at main switch or circuit breaker.**

### IMPORTANT SAFEGUARDS

Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable. Installation and servicing of this equipment should be performed by qualified service personnel only. Do not mount near gas or electric heaters. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability. Do not use this equipment for other than intended use.


## GENERAL INSTRUCTIONS

**Fixture should not be recessed. Fixture is designed for wall or ceiling mount only and should be mounted to a smooth, flat surface.**

1. Remove fixture face and lens. Remove internal reflector and set aside.
2. Prepare mounting by drilling thru the body at the desired prep mounting marks, and marking and/or drill into surface.
3. Line up the housing in desired location and mount securely.
4. Make sure water tight gasket is seated properly.
5. Install the Reflector back into its original position, and then reinstall face and lens.

### WIRING:

1. Wire according to local code and follow all appropriate safety measures.

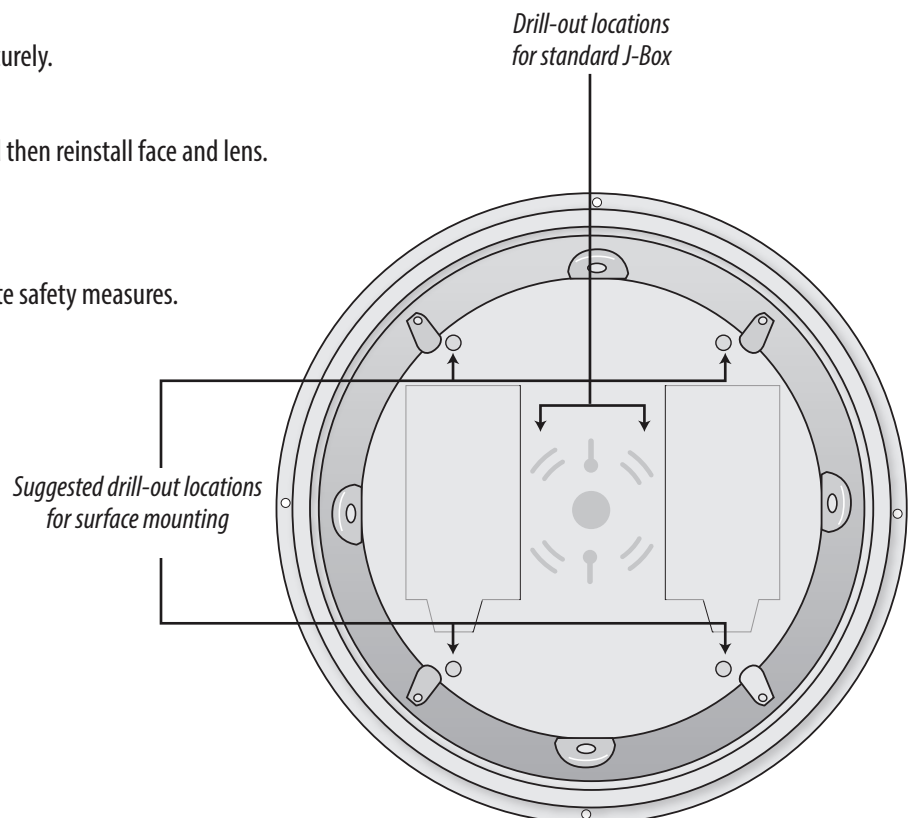

*NOTES: Make sure all gaskets are placed back into place and seated correctly (including the gasket for the body to J-Box - if included).*