ADVANTAGE
ENVIRONMENTAL LIGHTING

LSMF INSTALLATION INSTRUCTIONS

CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!

⚠️ **WARNING: Before beginning installation, disconnect electrical power at main switch or circuit breaker.**

IMPORTANT SAFEGUARDS

Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable. Installation and servicing of this equipment should be performed by qualified service personnel only. Do not mount near gas or electric heaters. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability. Do not use this equipment for other than intended use.
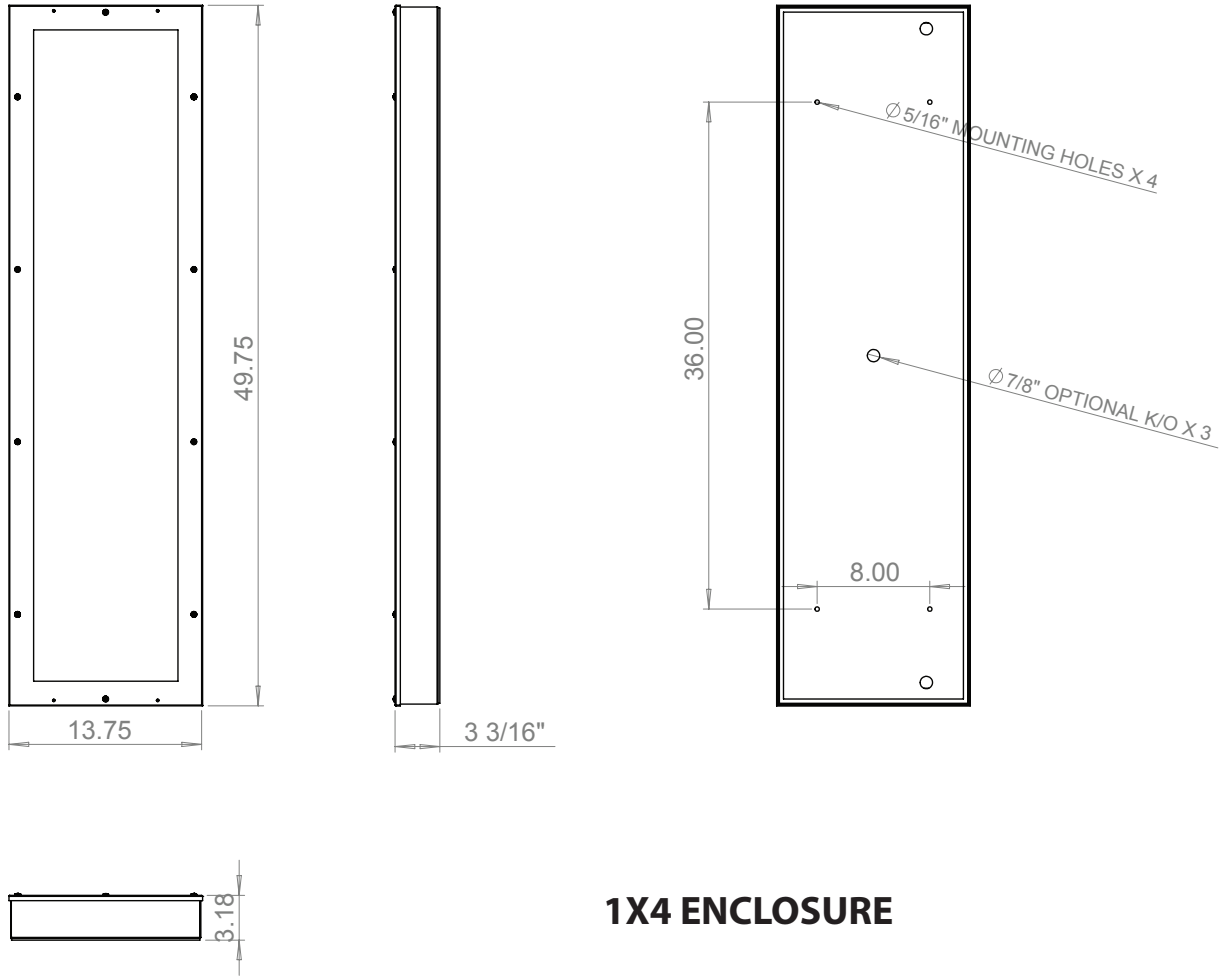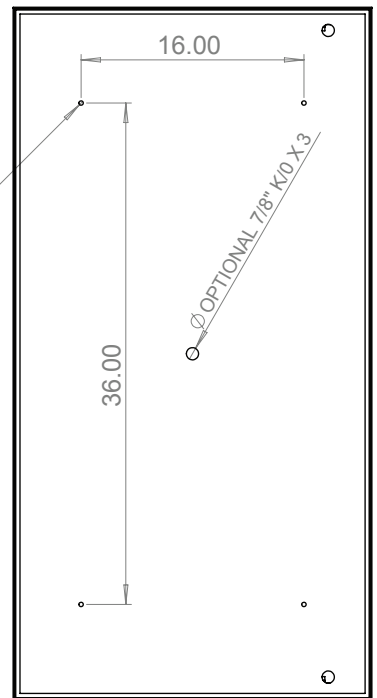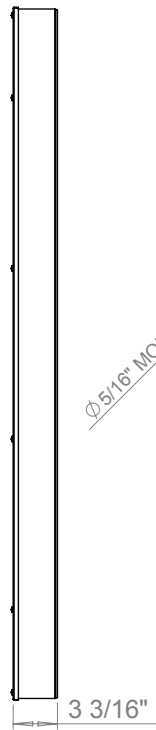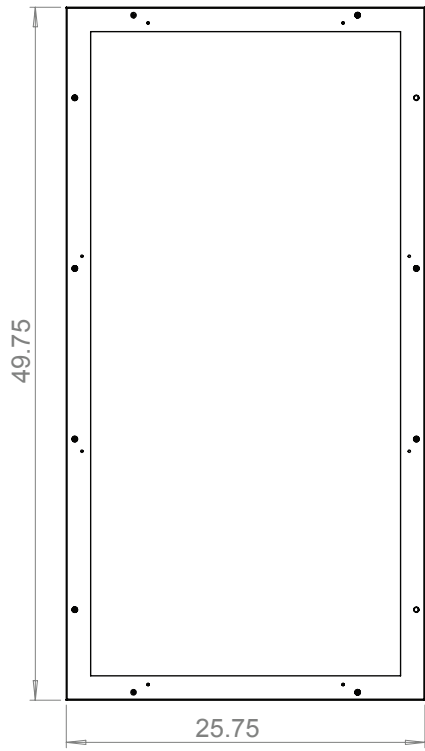
INSTALLATION INSTRUCTIONS

1

⚠️ REMINDER: TO AVOID ELECTRIC SHOCK HAZARD, DISCONNECT THE POWER AT THE PANEL BOARD (CIRCUIT BOX) BEFORE BEGINNING INSTALLATION!
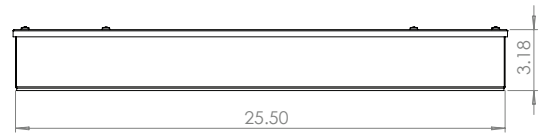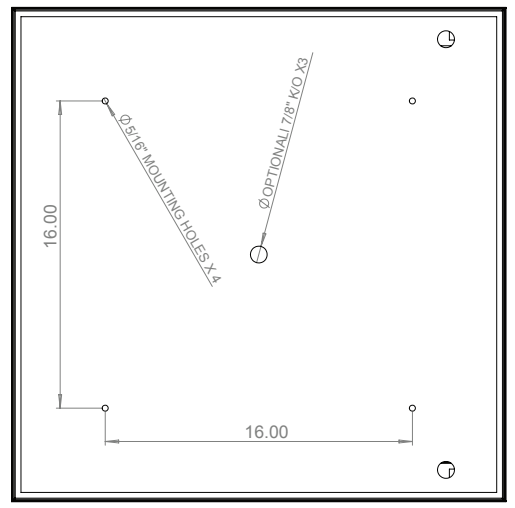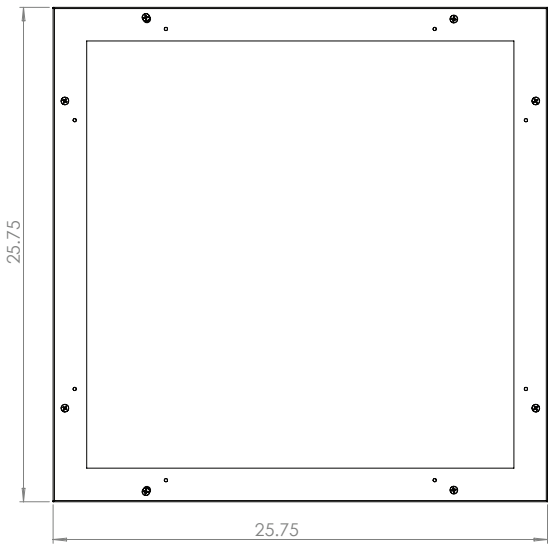
2

- Remove the door and locate the quick-connect inside the fixture. Complete the wiring to the appropriate supply wires. Connect fixture leads to power supply leads using the appropriate connectors (connections are made in the junction box, not the fixture). Be sure to connect the grounding wire to a suitable ground.

- Place fixture in place (typically over an existing electrical junction box). Locate and drill pilot holes in mounting surface using the base plate as a template. Using fasteners/anchors appropriate for the mounting surface and fixture weight, (supplied by others), mount the fixture base.

- Run wiring leads into fixture and make the connections.

- Complete installation by replacing door and hand-tighten the fasteners.

ADVANTAGE
ENVIRONMENTAL LIGHTING

49.75

13.75

3 3/16"

3.18

Ø 5/16" MOUNTING HOLES X 4

36.00

Ø 7/8" OPTIONAL K/O X 3

8.00

1X4 ENCLOSURE

49.75

25.75

3 3/16"

3.18

Ø 5/16" MOUNTING HOLES X 4

16.00

36.00

Ø OPTIONAL 7/8" K/O X 3

2X4 ENCLOSURE

25.75

25.75

3 3/16"

3.18

25.50

Ø 5/16" MOUNTING HOLES X 4

Ø OPTIONAL 7/8" K/O X3

16.00

16.00

2X2 ENCLOSURE