

CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!




**WARNING: Before beginning installation, disconnect electrical power at main switch or circuit breaker.**


CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!

### Installation of our LDE is straight-forward and simple.

1) Using the back bracket (cleat), mark and drill for wire access, and mark and drill pilot holes for fasteners (supplied by others). Be sure to use fasteners appropriate for the mounting surface. Attach bracket to surface. Depending on the surface, a stud support maybe necessary.

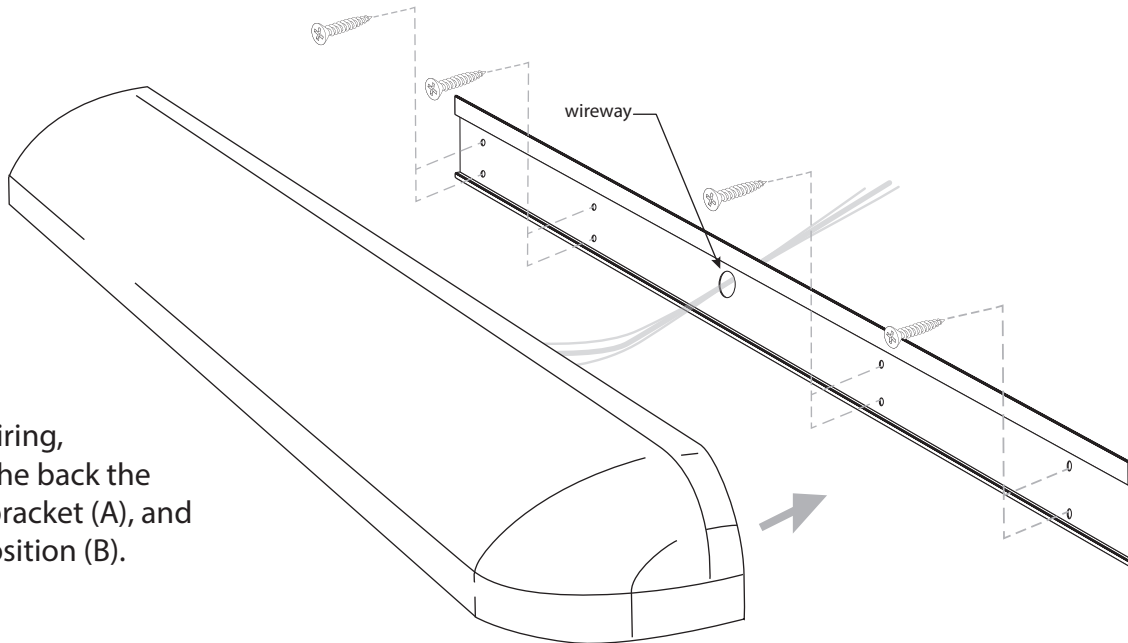

2) Connect wiring, place top of the back the fixture onto bracket (A), and rotate into position (B).

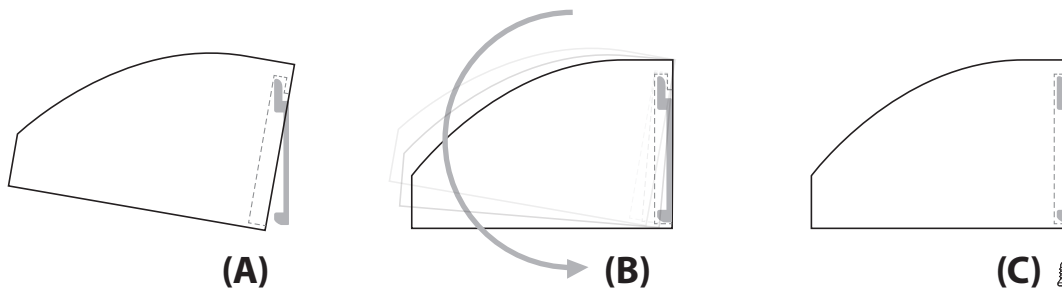

3) Using included set-screws, lock fixture into place (C). The number of set-screws will vary by fixture length.