



Installation for continuous runs

1. For fixtures ordered as continuous runs, a joiner plate/light trap will be provided for each fixture connection.
2. Using the included hardware, fasten the fixture together from the inside of the fixture. Hardware includes for each joining section:
 - 8-32x1/2 phillips head bolts with star washer nuts
 - Top joiner plates with (4) #8 self taper screws
 - Light leak plates
3. Utilizing the top connection plate, connect the two fixtures using 2 fasteners and the included top mounting holes on each side.

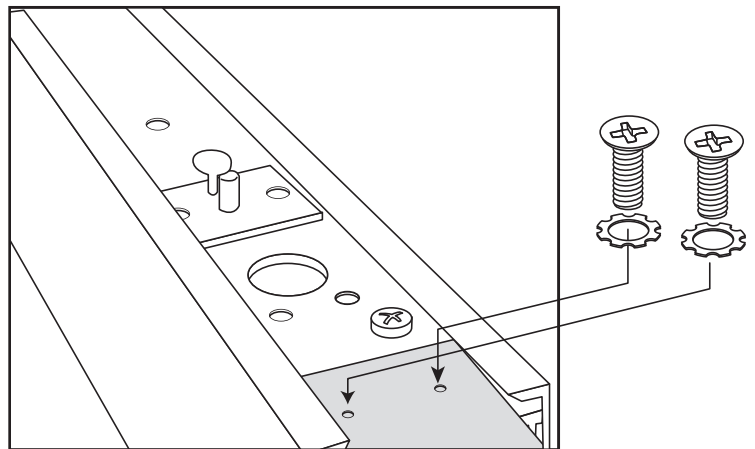

- Light trap prevents light leaks

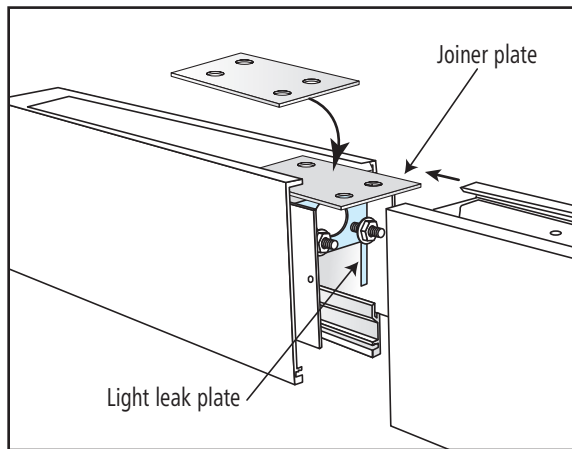

- Adjustable sliding suspension mount bracket

