

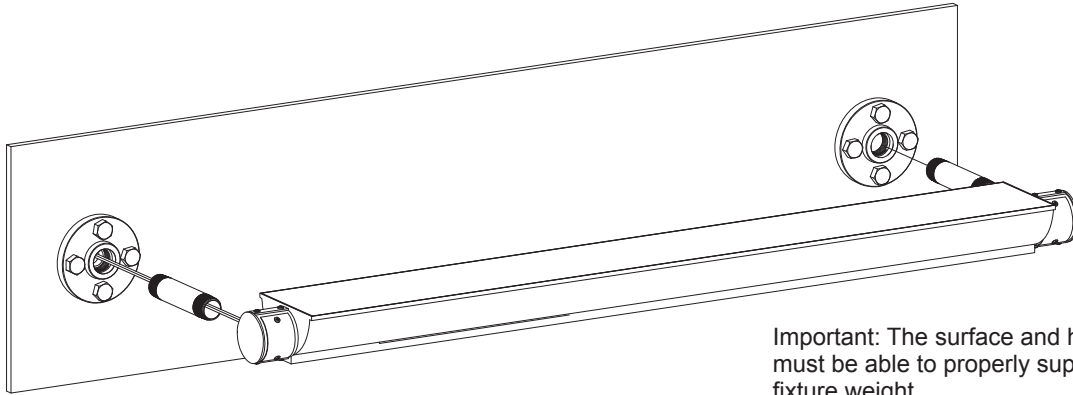
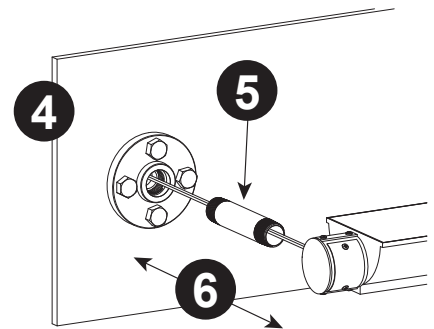





Important: The surface and hardware must be able to properly support the fixture weight.

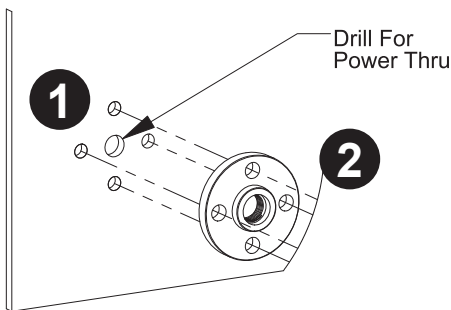

1. Determine the power side, then drill hole in mounting surface.
2. After marking the mounting locations, install threaded pipe flanges (by others), or prepare power lead from an installed junction box.
3. Secure the flanges with LAG bolts (by others) as shown.
4. Thread power feed thru the middle of the flange. Wire the fixture to the incoming supply.

5. Line up the fixture, install a 1" x 6" threaded nipple, and the threaded pipe flange (by others) on both ends.
6. Press all together, and rotate the threaded pipe nipples clockwise to tighten.

To adjust the fixture, loosen (DO NOT REMOVE) the inside screws shown on each fixture end.

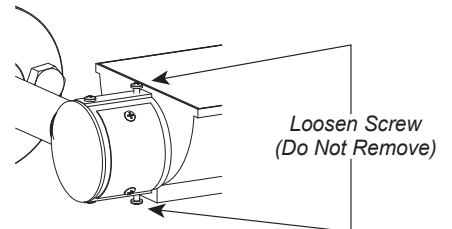

CAUTION: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SAVE THESE INSTRUCTIONS!




WARNING: Before beginning installation, disconnect electrical power at main switch or circuit breaker.

IMPORTANT SAFEGUARDS


Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable. Installation and servicing of this equipment should be performed by qualified service personnel only. Do not mount near gas or electric heaters. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition. Any modification or use of non-original components will void the warranty and product liability. Do not use this equipment for other than intended use.

DMX WIRING DIAGRAM

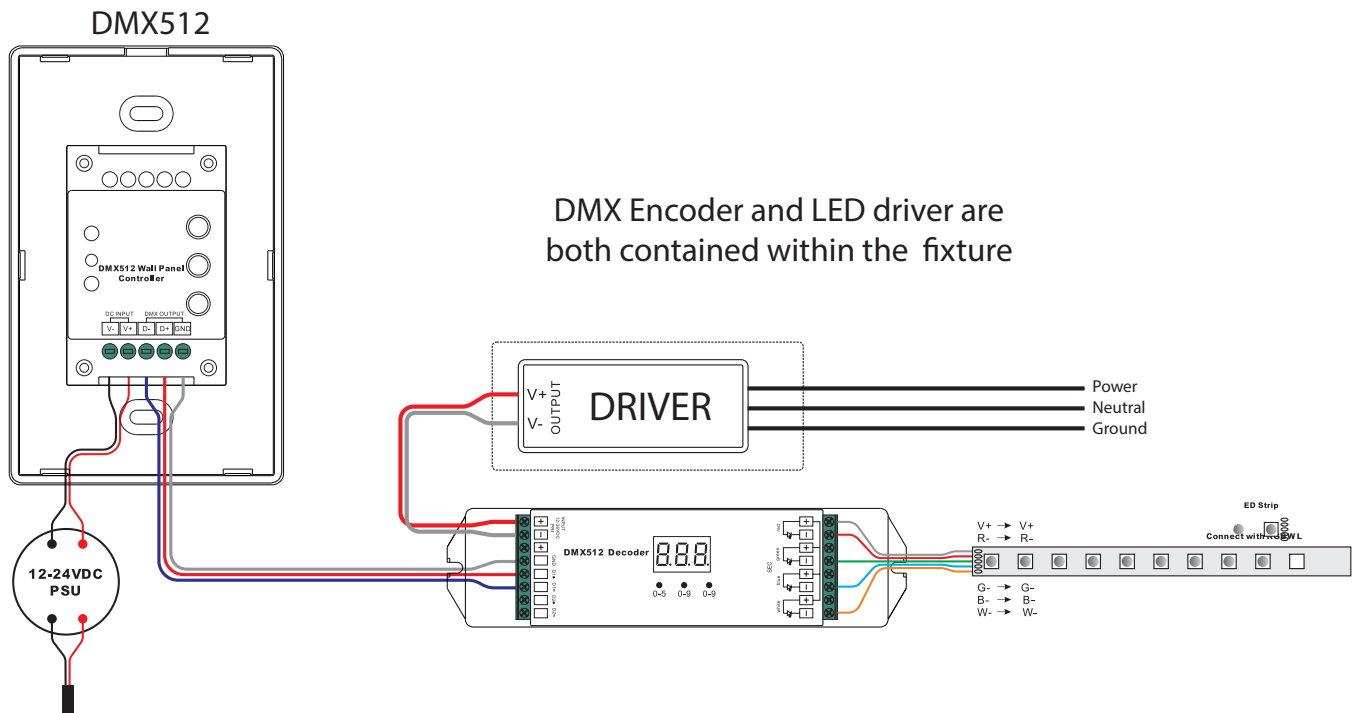


The SLH is specially designed for easy continuous run installations. The following illustrates the steps needed to connect two or more SLH fixtures.


1. Remove the two fasteners closest to the body and the end cap can be removed.

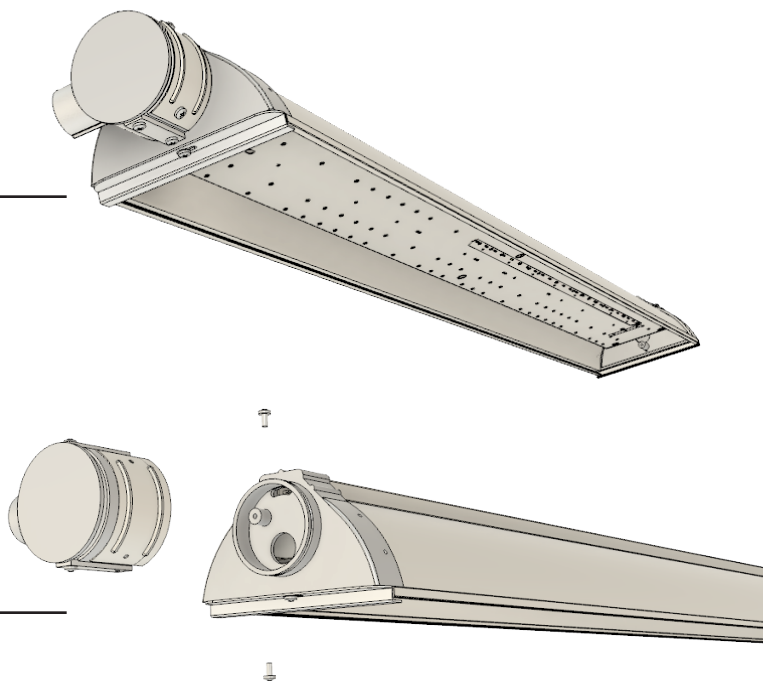

2. Thread wiring thru opening in fixture.

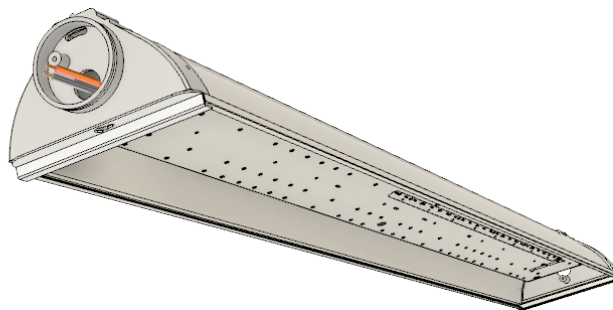

3. Connect wiring from fixture to fixture.

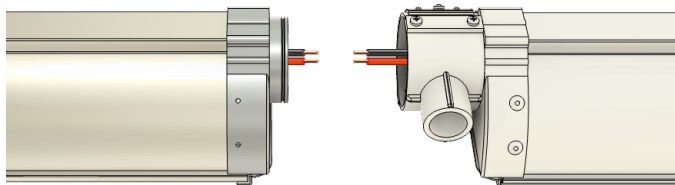

4. Remove end cap ONLY from next fixture, connect fixtures and secure with two fasteners.

