




1

Fixture as delivered

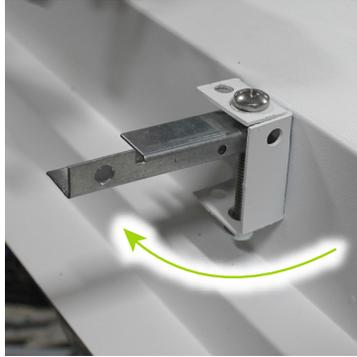


2

Swivel leveling arm outward




3

Attach carabiner to eyelet hole on bracket welded to case - **NOT TO THE HOLE ONE IN THE LEVELING ARM!**

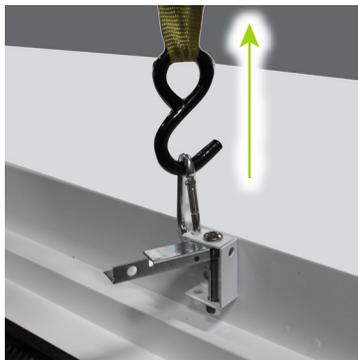

4


Attach a lifting cord to carabiner and lift unit into place

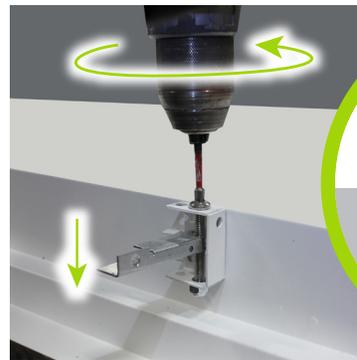

5

Remove carabiner and cord, rotate bolt to lower leveling arm and secure unit to depth of the ceiling

6

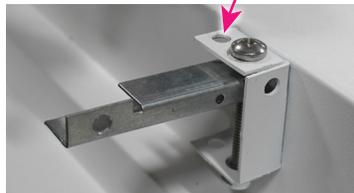

This hole is used for seismic security (client supplied cord or chain)