


## CB Series

CCT/Wattage Selectable  
LED Flat Panel Light

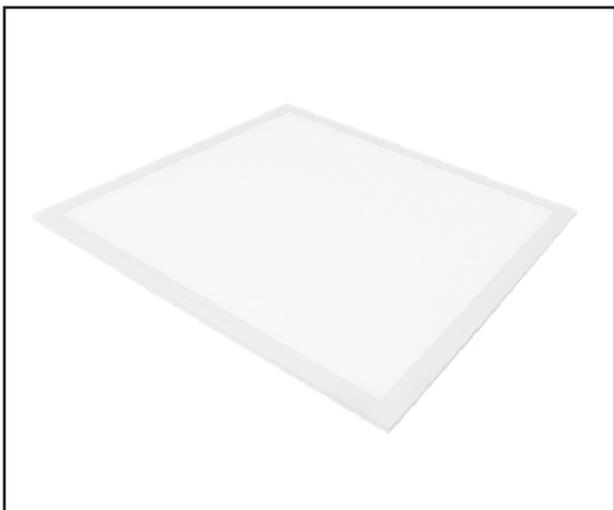

### PRODUCT SPECIFICATIONS

#### DESCRIPTION

The CB series is a back lit LED flat panel with selectable 3500K, 4000K, or 5000K color temperatures. Designed for recessed, surface mounting, or suspended applications.

#### APPLICATIONS

The CB series is perfect for offices, schools, government buildings, commercial applications, and any application that requires a quality flat panel light with adjustable color temperature.

#### OPTICAL SYSTEM

Color temperature selectable in 3500K, 4000K, and 5000K. >80 CRI with a lifetime rating of >50,000.

#### ELECTRICAL SYSTEM

0-10V dimming driver standard, 120-277VAC.

#### MOUNTING

This fixture is designed for recessed, surface, or suspended mounting.

#### LISTINGS

UL and cUL Listed. ETL Listed.  
Independently tested to IESNA LM-79 and LM-80 specifications.  
Made in the USA with option USA

#### WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at [www.aelnow.com/warranty](http://www.aelnow.com/warranty)

### ORDERING INFORMATION


Example: CB24-S-S-M

SERIES	CCT	OUTPUT	VOLTAGE	OPTIONS
<b>CB14</b> 1x4	<b>S</b> Selectable CCT	<b>S</b> Selectable Wattage	<b>M</b> 120/277 (Multi-volt)	<b>12EBL</b> 12W Emergency
<b>CB22</b> 2x2	3500K, 4000K, 5000K	30W/35W/40W (2x2)		<b>SMS14</b> 1X4 Surface Mount Shroud
<b>CB24</b> 2x4		30W/40W/50W (2x4)		<b>SMS22</b> 2X2 Surface Mount Shroud
				<b>SMS24</b> 2X4 Surface Mount Shroud
				<b>USA</b> Made in the USA


Output	Delivered Lumens	Luminous Efficacy	L70 @20C (hrs)
30W	3150	105 lm/W	>50K
35W	3675	105 lm/W	>50K
40W	4200	105 lm/W	>50K
50W	5250	105 lm/W	>50K

## DIMENSIONS

2X2

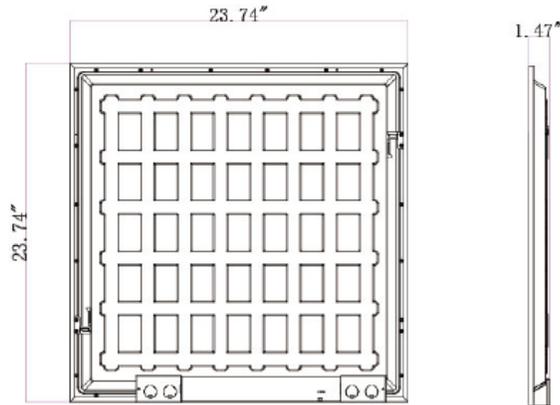

2X4

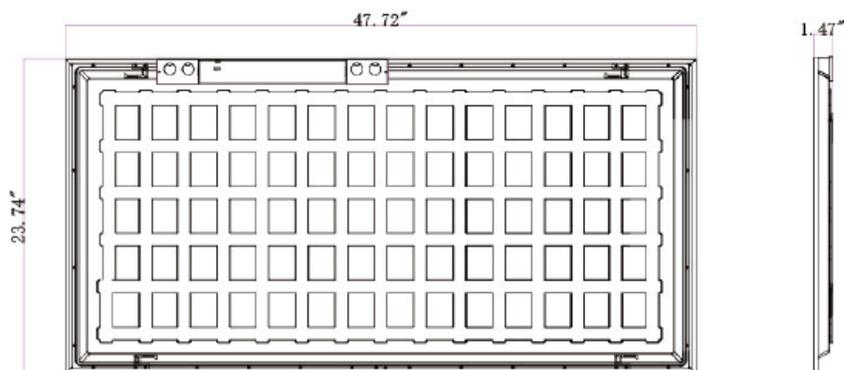

1X4

