ADVANTAGE ENVIRONMENTAL LIGHTING

MADE IN THE USA

CATALOG #:

PROJECT:

TYPE:

DBXC
DBXBC DRUM SURFACE OR SUSPENDED LIGHT

DIMENSIONS CAN BE FOUND ON THE NEXT PAGE

LED MODULE:
- 3000K, 3500K, 4000K
- >90 CRI
- 3500K noted below. Consult factory for performance of all CCTs

  34A - 34 Watt Nominal, min 2000 delivered lumens, 59 LPW, dimmable 120V TRIAC to 10%

  20D - 24 Watt Nominal, min 2000 delivered lumens, 86 LPW, dimmable 0-10V to 1%

  40D - 48 Watt Nominal, min 4000 delivered lumens, 86 LPW, dimmable 0-10V to 1%

  62D - 75 Watt Nominal, min 6000 delivered lumens, 82 LPW, dimmable 0-10V to 1%

CONSTRUCTION: 18 GA steel chassis.

ELECTRICAL: 120-277V input power supply.

LISTING: UL for US and Canada. Suitable for damp location.

MOUNTING:
- Surface
- Cable (3 cable system, 50" adjustable)**
- Stem Mounting (25" stem, 45 degree swivel)

WARRANTY: 5 Year Full Warranty.

See additional specification sheets for matching decorative pendant without light output ("DBXBC series")

*** *Contact Factory for custom pendant lengths*

ORDER EXAMPLE: DBXC-36-34A18-40-B

SERIES	SIZE	LIGHT OUTPUT	COLOR TEMP.	CRI	FINISH
☐ DBXC ☐ DBXBC	☐ 8 8" ☐ 12 12" ☐ 16 16" ☐ 24 24" ☐ 28 28" ☐ 36 36"	☐ 34A18 2000LM Triac Dimming ☐ 27D18 2700LM 0-10V Dimming ☐ 40D18 4000LM 0-10V Dimming ☐ BLANK Blank Plate	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K	☐ 9 90CRI	☐ S Silver ☐ B Black ☐ W White ☐ C Custom

ADVANTAGE ENVIRONMENTAL LIGHTING

MADE IN THE USA

CATALOG #:

PROJECT:

TYPE:

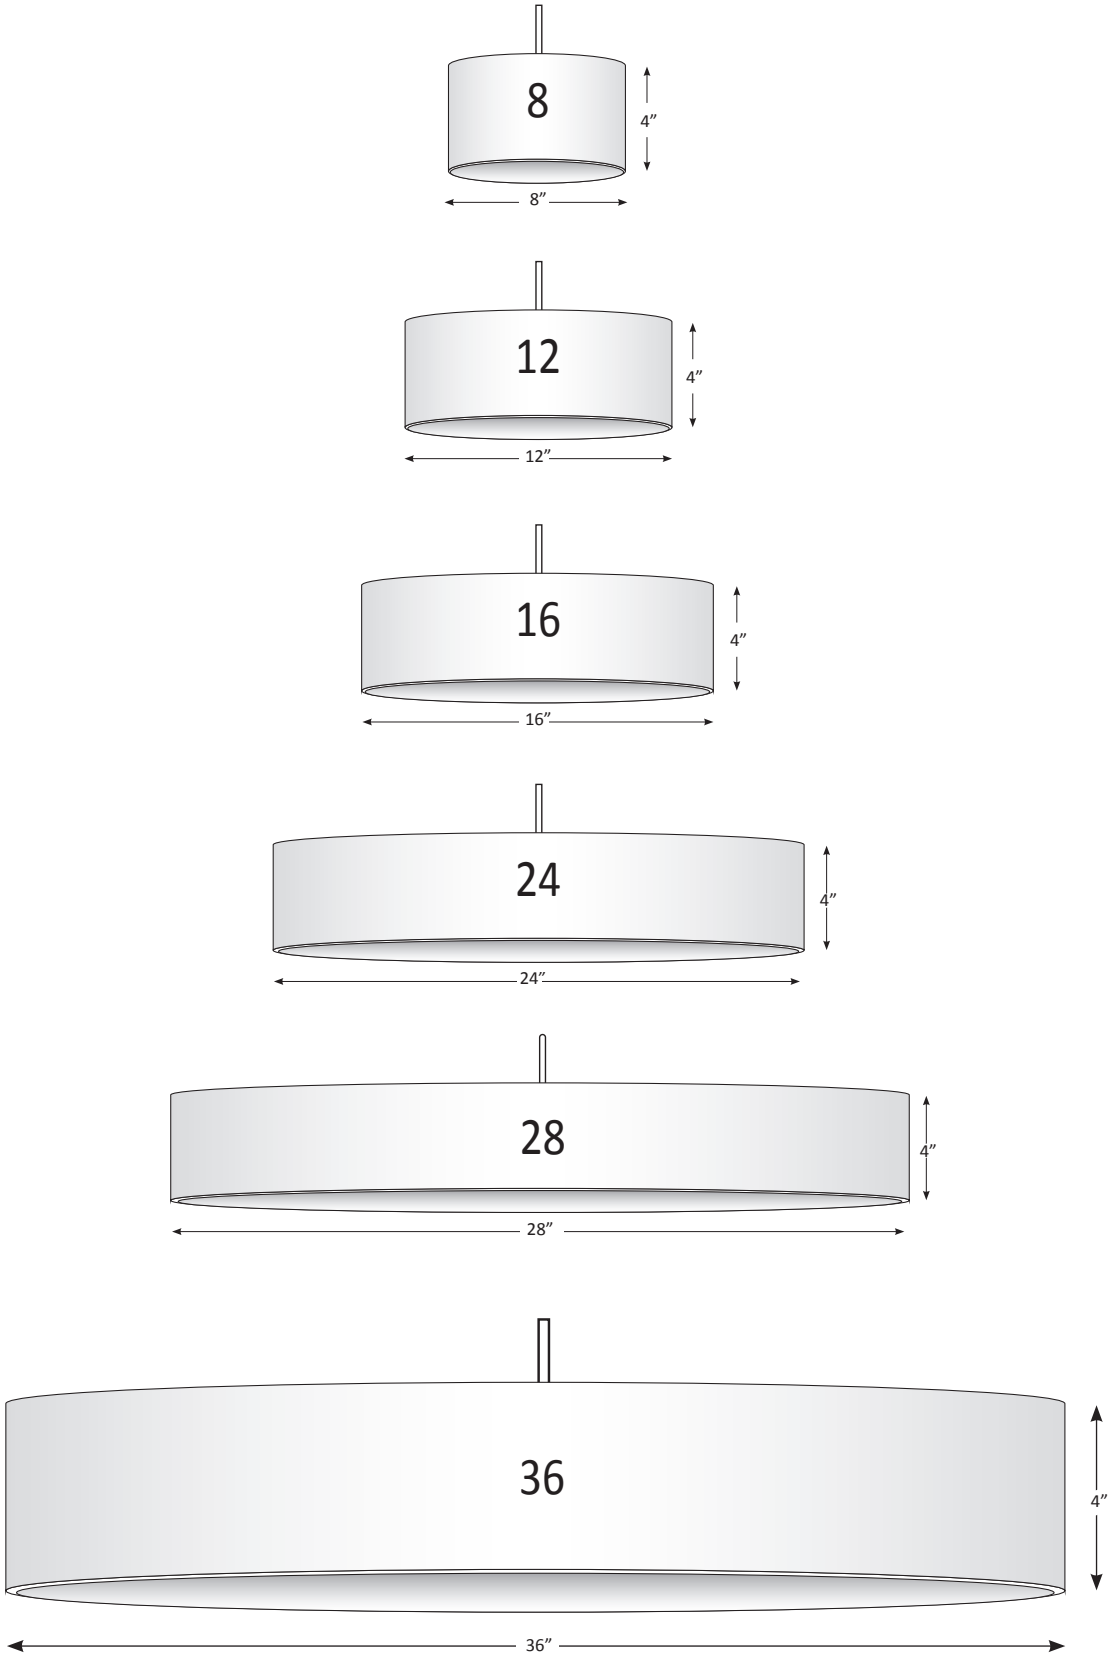

817.468.3591 aelnow.com info@aelnow.com

Specifications to change without notice