



Advantage Environmental Lighting

EM3

Adjustable Recessed Emergency Down-light Unit

STANDARD



ILLUMINATION

- Adjustable ultra-bright 8W bi-pin halogen lamp head.
- Sealed beam PAR36-type gimbal trim with smooth chrome-plated metallized reflector and plastic lens offers optimal light distribution.

ELECTRICAL

- Dual 120/277 voltage.
- Junction box with 3/4" knockouts for AC input.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Steel mounting frame and housing.
- 6" recessed housing with mounting bar hangers.
- Impact-resistant thermoplastic adjustable gimbal trim.
- Trim securely attached to housing with spring clips.




MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations.

DIMENSIONS

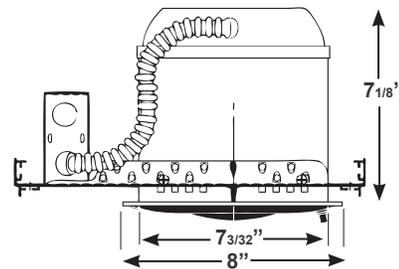

ORDERING INFORMATION

Sample Part Number: **EM3-1-WHT-GIMBAL**

Model	Housing Color	
EM3	WHT White	GIMBAL
	BLK Black	
	BGE Beige	



Advantage Environmental Lighting

EM3

Adjustable Recessed Emergency Down-light Unit

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EM3	10	10	0.05	0.05

CENTER-TO-CENTER SPACING GUIDELINES

Consult factory for details.