



Advantage Environmental Lighting

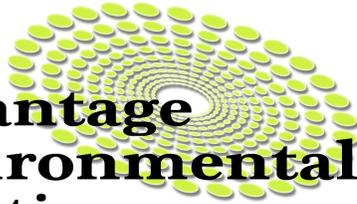

Catalog Number
Project
Type

FHBL

High Quality Full Body High Bay Luminaire Wired for or with LED Tubes

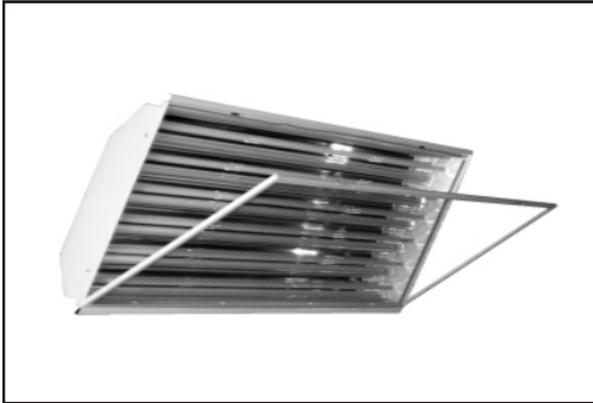

PRODUCT SPECIFICATIONS

DESCRIPTION

The FHBL Series is a LED High Bay available in three body sizes. It was designed for standard suspended or surface mounted high bay applications. Multiple lensing options are available including diffusers and polycarbonate lenses. With virtually unlimited applications, the FHBL Series allows architects and designers the freedom to experiment with their designs without exceeding ever decreasing energy budgets.

APPLICATIONS

The FHBL Series of Full-Body High Bay Luminaire wired for LED tubes were designed to be high quality, energy efficient fixtures for use in commercial applications, offices, government facilities, schools, and public areas.

CONSTRUCTION

The fixture is constructed of a heavy gauge steel body. Housing embossed for maximum rigidity. Rounded side flanges for safe handling.

OPTICAL SYSTEM

White polyester polymer finish with a minimum 93% reflectivity. A variety of lensing options are available.

ELECTRICAL SYSTEM

120/277V applications

MOUNTING

The fixture can be suspended or surface mounted.

LISTINGS

ETL and cETL Listed. Damp location rated.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

ORDERING INFORMATION

Example: FBHL632ADELED

With Tubes Example: FBHL632ADEWT18W40


SERIES	LAMPS PER SECTION	LAMP REPLACEMENT		DOOR FRAME		DIFFUSER	
FHBL	2	17	17W T8	N	No Door Frame	BLANK	None
*FHBLT	3	28T8	28W T8	BLANK RW	WHITE FLUSH STEEL	A	.1 Acrylic
	4	28T5	28W T5		WHITE REGRESSED	A125	.125 Acrylic
	5	32	32W T8		ALUMINUM	P125	.125 Clear Poly
	6	54	54W T5HO				
	8						

*Tandem length is 8'

WIRE APPLICATION		LED		WT WATTAGE OPTIONS		COLOR TEMP		OPTIONS	
BLANK	SINGLE END	LED	WIRED FOR LED	10	10 WATT 36" OR 48"	30	3000K	OC4EX	360 Motion Sensor (Pre-Wired)
DE	WIRING* DOUBLE END WIRING**	WT	LAMPS WITH TUBES INCLUDED	12	12 WATT 48"	35	3500K	12EBL	1200 Lumen Emergency Ballast
				15	15 WATT 36" OR 48"	40	4000K	STP	Stainless Steel Tamper-Proof
				18	18 WATT 48"	50	5000K	FB	Screws Internal Fas-Blow Fuse
				20	20 WATT 48"			SB	Internal Slow-Blow Fuse
								FW	Flex Whip 6'
								AC10	10' Aircraft Cable Y
								C6SJ	6' SJ Cord
								TP20277	Twist Lock Receptacle 20 Amp 277
								FHBWG4	Wire Guard 4L

* Non-Shunted Sockets Wired at One End (Blank)

** Shunted Sockets Wired with White, Opposite End Wired with Black (DE)

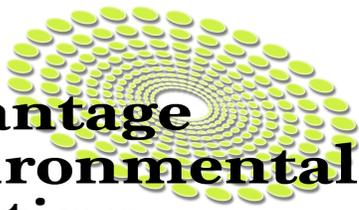

FIXTURE DIMENSIONS

