ADVANTAGE ENVIRONMENTAL LIGHTING

CATALOG #:	
PROJECT:	
TYPE:	

LCSPR LED SPILL RING CEILING FIXTURE

HOUSING: Die-formed Cold-rolled Steel with Pendant Type Options

FINISH OPTIONS: • Satin Nickel • Polish Brass • White • Oil Rubbed • Bronze

OPTICAL: Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

ELECTRICAL: High Power Factor (> 0.95), Low THD (< 20%) 0-10V dimming standard on some models.

LAMP: Built-in LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light. Color Temperature Option – 3000K, 3500K, 4000K, 5000K. MCT Type: Get Preferable Fixture Color Temperature by Slide Switch on LED Board. Color Temperature Option – 3000K, 3500K, 4000K

CERTIFICATIONS: ETL/cETL Listed, Suitable for Damp Locations

WARRANTY: 5 Years Warranty on Driver and LED Module

PDA

PDB

Ordering Information on Next Page ►

ADVANTAGE ENVIRONMENTAL LIGHTING

CATALOG #:

PROJECT:

TYPE:

LED Type

Model	Input Voltage	Input Wattage	Lumen (TYP)	CRI	Dimension (OD X H)	Energy Star
LCSPR10-9W-xxxxK-SN-120	120V	9W	900 / 3000K	> 80	10.4" x 4.2"	Yes
LCSPR-10-11W-xxxxK-SN-120	120V	11W	1000 / 3000K	> 80	10.4" x 4.2"	Yes
LCSPR-10-18W-xxxxK-SN-120	120V	18W	1340 / 3000K	> 80	10.4" x 4.2"	---
LCSPR-12-9W-xxxxK-SN-120	120V	9W	880 / 3000K	> 80	11.8" x 4.2"	Yes
LCSPR-12-11W-xxxxK-SN-120	120V	11W	1030 / 3000K	> 80	11.8" x 4.2"	Yes
LCSPR-12-18W-xxxxK-SN-120	120V	18W	1430 / 3000K	> 80	11.8" x 4.2"	Yes
LCSPR-15-23W-xxxxK-SN-M	120V ~ 277V	23W	2267 / 3000K	> 80	14.5" x 4.6"	Yes
LCSPR-16-28W-xxxxK-SN-M	120V ~ 277V	28W	2600 / 3000K	> 80	16.0" x 4.9"	Yes
LCSPR-18-35W-xxxxK-SN-M	120V ~ 277V	35W	3364 / 3000K	> 80	17.8" x 4.9"	Yes
LCSPR-21-40W-xxxxK-SN-M	120V ~ 277V	40W	3500 / 3000K	> 80	20.5" x 5.0"	Yes
LCSPR-24-40W-xxxxK-SN-M	120V ~ 277V	40W	3450 / 3000K	> 80	24.1" x 5.0"	Yes

LED Type
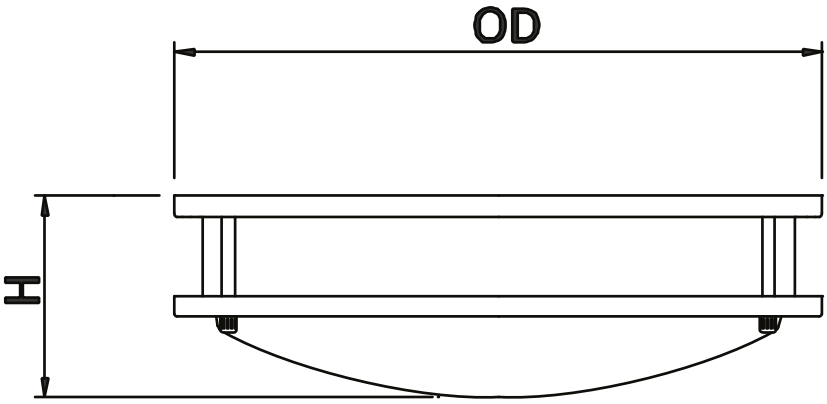
Model	Input Voltage	Input Wattage	Lumen (TYP)	CRI	Dimension (OD X H)	Energy Star
LCSPR-10-18W-MCT-SN-120	120V	18W	1340 / 3000K	> 80	10.0" x 4.2"	---
LCSPR-12-18W-MCT-SN-120	120V	18W	1430 / 3000K	> 80	11.8" x 4.2"	Yes
LCSPR-15-24W-MCT-SN-M	120V ~ 277V	24W	2267 / 3000K	> 80	14.5" x 4.6"	Yes
LCSPR-16-28W-MCT-SN-M	120V ~ 277V	28W	2600 / 3000K	> 80	16.0" x 4.9"	Yes
LCSPR-18-35W-MCT-SN-M	120V ~ 277V	35W	3364 / 3000K	> 80	17.8" x 4.9"	Yes
LCSPR-21-40W-MCT-SN-M	120V ~ 277V	40W	3500 / 3000K	> 80	20.5" x 5.0"	Yes
LCSPR-24-40W-MCT-SN-M	120V ~ 277V	40W	3450 / 3000K	> 80	24.1" x 5.0"	Yes