

## LERSM

LED Rounded Silhouette Surface Mount



## SPECIFICATIONS

### DESCRIPTION

The LERSM is an LED surface mount fixture with a rounded eclipse profile. A low-profile rounded silhouette adds beautiful architectural design elements to any commercial application.

### ELECTRICAL SYSTEM

120/277V, 0-10V dimming standard. Long-life LED system rated for 100K life hours (L70 @ 50°C). Complies with federal energy efficiency standards. CRI >82, 90 CRI optional. Power factor >0.90

### OPTICAL SYSTEM

Matte white lens or prismatic acrylic #12 pattern lens provides optimal lumen output and light transmission.

### LISTINGS

UL listed for damp locations.

### MOUNTING

Direct wall mount.

### HOUSING

Constructed of heavy gauge USA steel.

### LED

LEDs available in 2700K, 3000K, 3500K, 4000K and 5000K with CRI > 82. Projected life is >100,000 hours at 70% lumen maintenance. 90 CRI available.

### WARRANTY

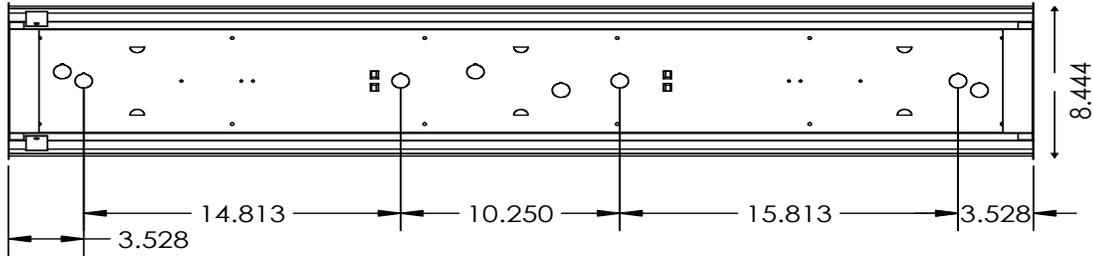
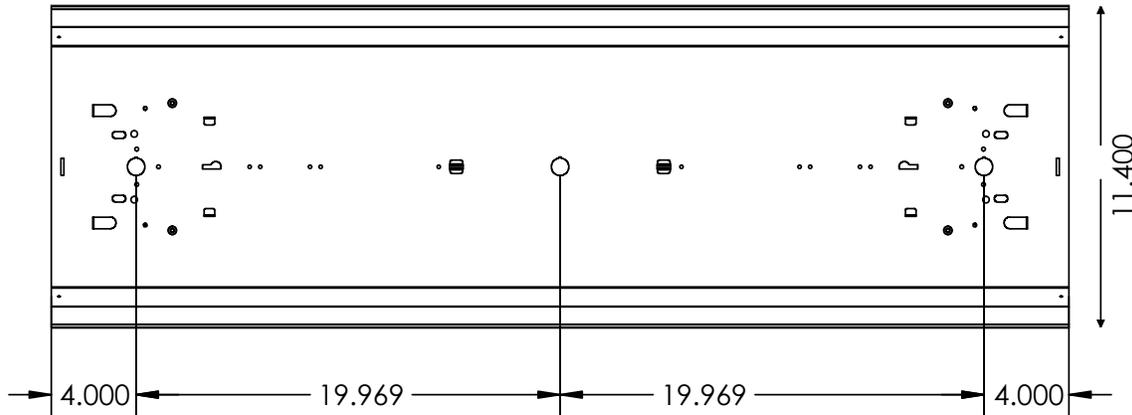
5 - Year Limited Warranty. Complete warranty and terms located at: [www.aelnow.com/warranty](http://www.aelnow.com/warranty)

## ORDERING INFORMATION

Example: LERSM-224-40-S-MW-M

For custom lumen packages, add desired lumens to the end of part number.

SERIES	LENGTH	CCT	ILLUMINATION	LENS	VOLTAGE	OPTIONS						
LERSM	224	9.5" x 25.75"	27	2700K	S	Standard	MW A12	Matte White Acrylic Prismatic #12 Acrylic	M	Multi-Volt (120-277V)	12EBL 90	1200 Lumen Emergency Ballast 90 CRI
	248	9.5" x 51.25"	30	3000K	M	Medium						
	424	16.5" x 25.75"	35	3500K	H	High						
	448	16.5" x 51.25"	40	4000K	VH	Very High						
			50	5000K								

**DIMENSIONS**
**248**

**448**


.875 POWER KO DISTANCES

**LED INFORMATION**

Output	Lumen Output	Wattage	CRI	LPW
<b>Standard</b>	2,000 Lm	14.2	82	140
<b>Medium</b>	4,000 Lm	28.5	82	140
<b>High</b>	6,000 Lm	42.8	82	140
<b>Very High</b>	8,000 Lm	57.1	82	140