

LLUCT

LED Linkable Under Cabinet
 Color Temperature Selectable



STANDARD

OPTIONAL



PRODUCT SPECIFICATIONS

DESCRIPTION

The LLUCT Series is a linkable LED under cabinet that provides a widespread light distribution for under cabinet task lighting. Designed with quality, efficacy, and long-lifespan in mind to cut maintenance costs. CCT selectable in 3000K, 3500K, and 4000K color temperatures.

APPLICATIONS

The LLUCT series of LED under cabinet fixtures are designed to be high quality, energy efficient under cabinet luminaires for commercial and residential applications such as task lighting, office lighting, covers, utility/work areas, under and over cabinets, and more.

CONSTRUCTION

Constructed of an extruded aluminum body, and powder coated white. Available in 9", 12", 18", 24", 33", and 42" lengths.

ELECTRICAL SYSTEM

120V applications, Triac dimming system with a Hi-low and 50% dimming three-way switch. Long-life LED system rated for >50K life hours (L70). Complies with federal energy efficiency standards. Operating temperature is -20° C to 50° C. CRI >80.

MOUNTING

Units are designed for under cabinet surface mounting. Each fixture includes a 6" joiner cable, 39" power cord, and a knock-out connector system.

LISTINGS

UL and cUL Listed. Damp location rated.

WARRANTY


5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

ORDERING INFORMATION

Example: LLUCT-24-MCT-120-W

Series	Length	CCT	Voltage	Color
LLUCT	9	MCT 3000K, 3500K, 4000K	120 120V Triac Dimming	W White
	12			
	18			
	24			
	33			
	42			

Accessories		Options	
KOC	Knock-out Connector	BAA	BAA Compliant
PC	39" Power Cord		
6JC	6" Joiner Cable		
18JC	18" Joiner Cable		
BC	Butt-Connector		

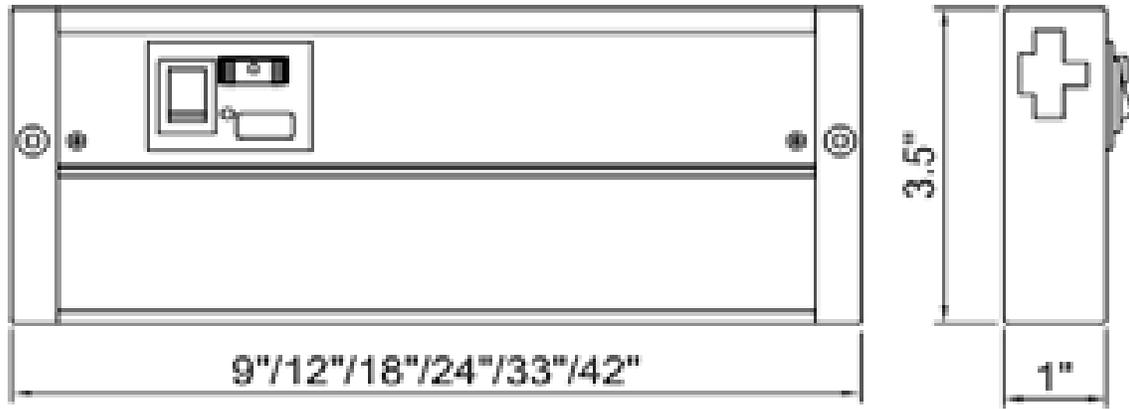FIXTURE DIMENSIONS

ACCESSORIES

*6" joiner cable, 39" power cord, and knock-out connector included standard.




Knock-out
Connector



39" Power Cord



6" Joiner Cable



Butt-Connector

LED SYSTEM DATA

Length	Delivered Lumens	System Wattage	L70 (life hrs)
9"	1000	5	>50K
12"	1500	6	>50K
18"	2250	9	>50K
24"	3000	11	>50K
33"	3000	13	>50K
42"	3000	16	>50K