Advantage. Environmental Lighting

CATALOG NUMBER	
PROJECT	
TYPE	

LSNKUC

LED Linkable Under Cabinet Color Temperature Selectable

STANDARD | OPTIONAL

PROUDLY MADE IN USA

LUTRON

PRODUCT SPECIFICATIONS

DESCRIPTION

The LSNKUC series is a linkable LED under cabinet that provides a widespread light distribution for task lighting. Designed with quality, efficacy, and long-lifespan in mind to cut down maintenance costs. CCT selectable in 3000K, 3500K, and 4000K color temperatures.

APPLICATIONS

The LSNKUC series of LED under cabinet fixtures are designed to be high quality, energy efficient under cabinet luminaires for residential applications such as task lighting, office lighting, covers, utility/work areas, under and over cabinets, and more.

CONSTRUCTION

Constructed of an extruded aluminum body, and powder coated white. Available in 9", 12", 18", 24", 33", and 42" lengths.

ELECTRICAL SYSTEM

120V applications, Triac dimming system with a Hi-low and 50% dimming three-way switch. Long-life LED system rated for >50K life hours (L70). Complies with federal energy efficiency standards. Operating temperature is -20˚C to 50˚C. CRI >80.

MOUNTING

Units are designed for under cabinet surface mounting. Each fixture includes a 6" joiner cable, 39" power cord, and a knock-out connector system.

LISTINGS

ETL and cETL Listed. Damp location rated.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

ORDERING INFORMATION

Example: LSNKUC24-MCT-120-W

Series	Length		CCT		Voltage		Color	
LSNKUC	9	9" x 3.5" x 1"	MCT	3000K, 3500K, 4000K	120	120V Triac Dimming	W	White
	12	12" x 3.5" x 1"						
	18	18" x 3.5" x 1"						
	24	24" x 3.5" x 1"						
	33	33" x 3.5" x 1"						
	42	42" x 3.5" x 1"						

Accessories	
KOC	Knock-out Connector
PC	39" Power Cord
6JC	6" Joiner Cable
18JC	18" Joiner Cable
BC	Butt-Connector

LSNKUC

LED Linkable Under Cabinet Color Temperature Selectable

FIXTURE DIMENSIONS

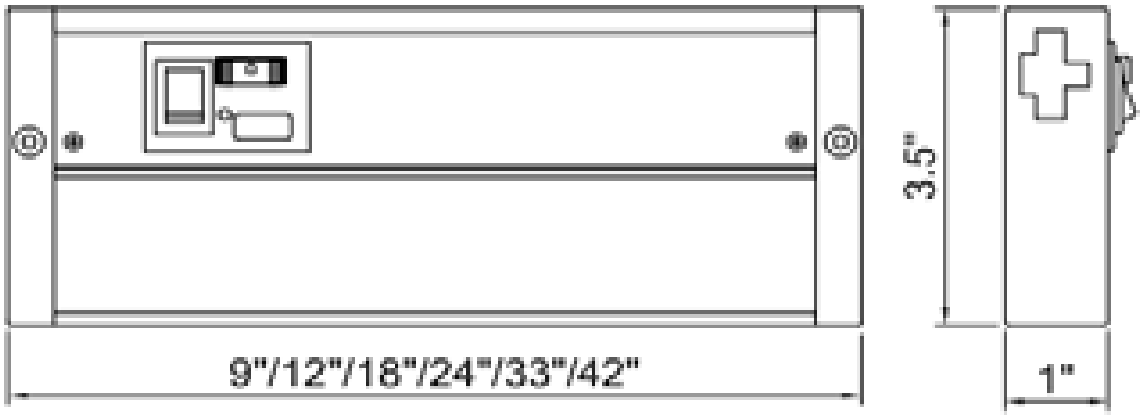

ACCESSORIES

*6" joiner cable, 39" power cord, and knock-out connector included standard.

Knock-out Connector

39" Power Cord

6" Joiner Cable



Butt-Connector

LED SYSTEM DATA

Length	Delivered Lumens	System Wattage	L70 (life hrs)
9"	1000	5	>50K
12"	1500	6	>50K
18"	2250	9	>50K
24"	3000	11	>50K
33"	3000	13	>50K
42"	3000	16	>50K