

MEZ

LED Recessed Wall Mount Step-Light



STANDARD

OPTIONAL



SPECIFICATIONS

DESCRIPTION

The MEZ is an LED healthcare/patient room step light. This fixture is available in low lumen (S or M) output packages, or high lumen (H) output packages to fit the needs of any application. If custom lumen outputs are needed, add desired lumens to end of part number.

CONSTRUCTION

Choice of 18 gauge cold roll steel, or 18 gauge stainless steel. Full face or internal louver faceplate. Choice of faceplate finish, with anti-microbial white paint being optional.

ELECTRICAL SYSTEM

120/277 Multi-Volt. Long-life LED system rated for >100K hours (L70 @ 25° C). Complies with federal energy efficiency standards. Available in 2700K, 3000K, 3500K, 4000K, and 5000K white LEDs. Amber, Blue, and Red LEDs are available. If additional options are needed, consult factory.

OPTICAL SYSTEM

Multiple lens options available, if additional options are needed, consult factory.

LISTINGS

ETL and cETL listed for damp locations. Wet location option available.

MOUNTING

Recessed wall mount.

LED

80 CRI or 90 CRI LEDs available in 2700K, 3000K, 3500K, 4000K, 5000K. Red, Blue, and Amber LEDs available.



WARRANTY

5 - Year Limited Warranty. Complete warranty and terms located at: www.aelnow.com/warranty

Output	Est. Lumens White	Est. Lumens R/B/A	System Wattage
S	35	30	.25
M	75	64	.45
H	100	86	.72

* Delivered white lumens shown were tested with 4000K LEDs

Approximate Color Temperature Multiplier	
5000K	1.03
4000K	1
3500K	0.97
3000K	0.94
2700K	0.91

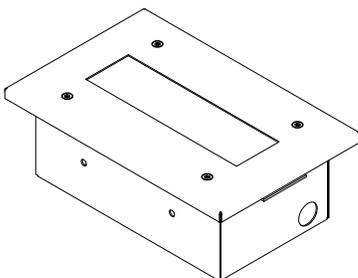

ORDERING INFORMATION

Example: MEZ-40-S-B18-PA125-W-M

Series	CCT	Output	Faceplate Material
MEZ	30	3000K	B18 Cold Roll 18 Gauge Steel
	35	3500K	
	40	4000K	
	50	5000K	SH18 Stainless Steel 18 Gauge
	R	Red LED	
	B	Blue LED	
	A	Amber LED	

Lens	Faceplate Finish	Voltage	Options
PA125 .125 Prismatic Acrylic	W Gloss White	M Multi-Volt (120/277V)	AM Anti-Microbial White Paint
CP125 .125 Prismatic Polycarbonate	MW Matte White		90 90 CRI
S Satin	BRZ Bronze		TPS Tamper-Proof Fasteners
PHA125 .125 High Impact Prismatic Acrylic	N Nickel		WL Wet Location
	SP Special		

DIMENSIONS

