




- The N2M759 canopy light is ideal for parking garages, storage areas, stairwells, and other areas requiring low profile lighting.
- Die cast, bronze powder coated housing with cooling design. High impact resistant polycarbonate lens.
- Motion sensor optional
- 5 Year Warranty



Power	45W / 65W	Lighting Angle	159°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	> 0.95	Working Life	> 50000 hrs
Driver Efficiency	> 90%	Working Temperature	-30 - +45°C
Luminous Flux	5850 Lm / 8450 Lm	Storage Temperature	-40 - +80°C
Color Temperature	5000K	Protection Level	Wet Location/IP65
CRI	Ra>70	Cable	Input Connect, 0.3m
Optional dimming function	1-10Vdc		

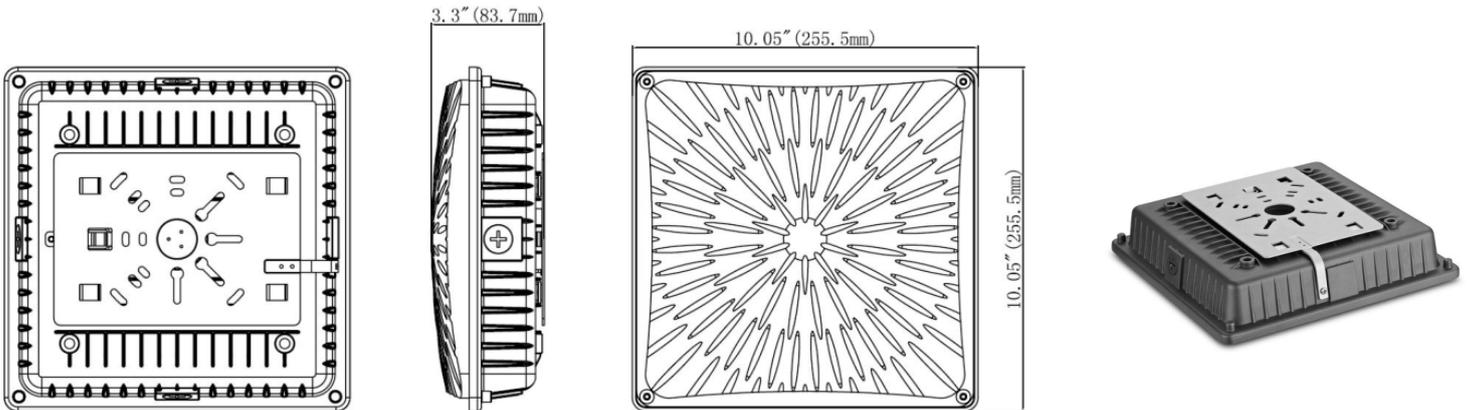

### Order Information Example

N2M75945W5K

### N2M759

Model	Wattage	CCT	Options
N2M759= LED Canopy	45W=45 Watts, 5850 Lumen 65W=65 Watts, 8450 Lumen	5K=5000K	MS=Motion Sensor

Specifications subject to change without notice.