| | |
|---|---|
| CATALOG #: | |
| PROJECT: | |
| TYPE: | DATE: |

# N2WSD 45W Wall Pack Light

## PRODUCT FEATURES:

- Optical design, greatly improved the light utilization and evenness
- High efficiency LED Driver, voltage AC120-277 ;
- Cast Aluminum design, better cooling, light quality, LED Tj < 85 .
- Photocell Control (Optional)

## Additional Information:

- Power: 45W
- Input: AC 120-277V
- Light Source: LUMILEDS
- Driver: WELED POWER

## PRODUCT APPLICATIONS:

The WALL PACK LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums, Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications

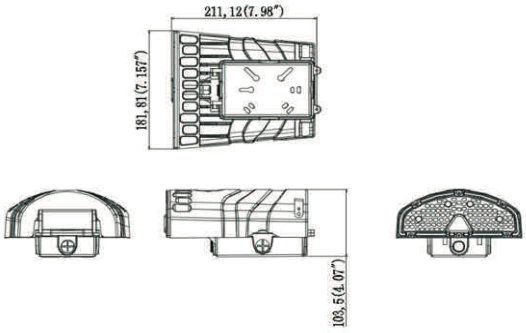


### Structure Features:

- Shell Materials: Aluminum & PC
- Finish: Dark Bronze/White
- Net Weight: 1.4KG (3.1 LBS)
- **Product Size: 211mm*181mm*103mm**
- **Carton Size: 525mm*390mm*370mm**


N2M, LLC
301 E. RISINGER RD., BLDG 109
FORT WORTH, TX 76140

817.468.3591

www.AELnow.com



Specifications subject to change without notice.

| | |
|---|---|
| CATALOG #: | |
| PROJECT: | |
| TYPE: | DATE: |

# N2WSD 45W Wall Pack Light

## TECHNICAL PARAMETERS:

| Type | N2WSD | | |
|---|---|---|---|
| **Power** | 45W | **Lighting Angle** | 74* 92° |
| **Input Voltage** | AC120-277V | **LED Brightness Decay** | <5%/6000 hrs |
| **PF** | >0.98 | **Working Life** | >75000 hrs |
| **Driver Efficiency** | >90% | **Working Temperature** | -30 - +45℃ |
| **Luminous Flux** | 6741 Lm | **Storage Temperature** | -40 -+80℃ |
| **Color Temperature** | 4000K/5000K | **Protection Level** | Wet Location |
| **CRI** | Ra>70 | **Cable** | Input Connect, No Cable |

## PHOTOMETRY:

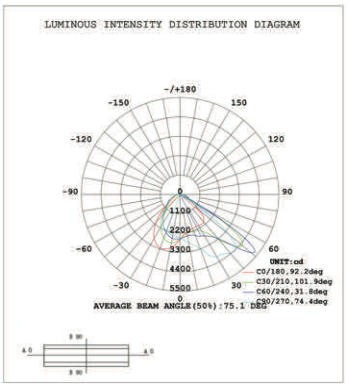


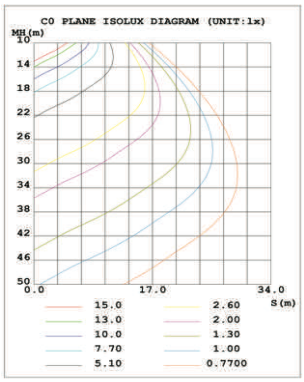


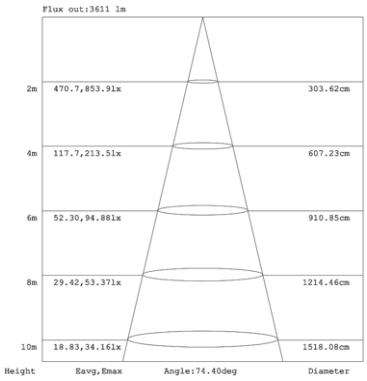


ORDERING EXAMPLE: **N2WSD-45W-AWP-27-50K-D-P**

| N2FL | | | | | |
|---|---|---|---|---|---|
| SERIES | WATTAGE | VOLTAGE | CCT | FINISH | CONTROL |
| **WSD** Wall Pack | **45W -** 45W<br>**70W -** 70W | **27** AC120-277V | **50K -** 5000K | **D** - Dark Bronze<br>**W** - White | **P -** Photocell |


**N2M, LLC**
301 E. RISINGER RD., BLDG 109
FORT WORTH, TX 76140

817.468.3591

www.AELnow.com


Specifications subject to change without notice.