Advantage Environmental Lighting

Catalog Number	
Project	
Type	

NPL

Wall Puff Linear Fixture

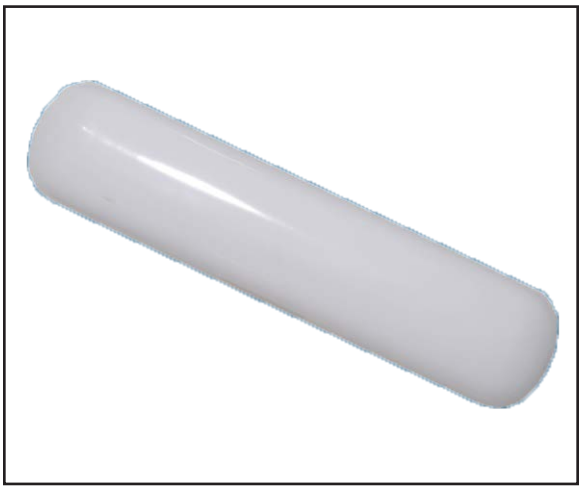

PRODUCT SPECIFICATIONS

APPLICATIONS

The Reverse Bath Bar diffusers can be used with a standard 2-LED strip fixture, to provide an economical, energy efficient.

CONSTRUCTION

All metal parts die formed from heavy gauge cold roll steel housing to insure uniformity and dimensional stability.

ELECTRICAL SYSTEM

Unless otherwise specified, ballasts are rapid start, class “P” thermally protected, H.P.F., CBM-ETL. Optional ballasts available include: energy saving (ESB), electronic (ELB), dimming (DIM), low temperature (CW). Standard voltage on all fixtures is 120V 60HZ AC, or as specified. Sufficient knockouts are provided on the back for all connections and through wiring.

OPTICAL SYSTEM

One piece 100% acrylic for a fully luminous light source.

LISTINGS

Fixture & Ballast: ETL Listed Ballast: Thermally protected, class P, HPF, Non PCB.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/ resources.

ORDERING INFORMATION

Example: NPL117WT1235

SERIES	LAMPS	LAMP REPLACEMENT		LED		WATTAGE		COLOR		OPTIONS	
NPL	**1**	**17**	17 Watt 2' T8 Lamp Replacement	**LED**	Wired for LED Lamps	**10**	10W	**35**	3500K	12EBL	1200 Lumens Emergency Ballast
	2	**25**	25 Watt 3' T8 Lamp Replacement	**WT**	With Tubes	**12**	12W	**40**	4000K		
		32	32 Watt 4' T8 Lamp Replacement			**15**	15W	**50**	5000K		
						18	18W				
						20	20W				

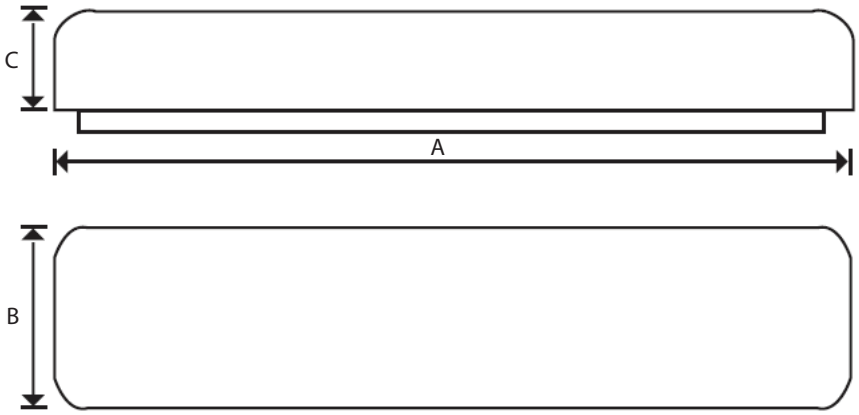

Series	A	B	C
NPL27	27”	6”	2.75”
NPL39	39”	6”	2.75”
NPL51	51”	6”	2.75”