


# SWP

## Slim Adjustable Wall Pack Series



LED Slim Adjustable Wall Pack series can be widely used in indoor or outdoor lighting (wet location). The head tilts from 0° to 90°. Ideal for mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booth, waiting rooms, the platforms of railway station, indoor stadiums.

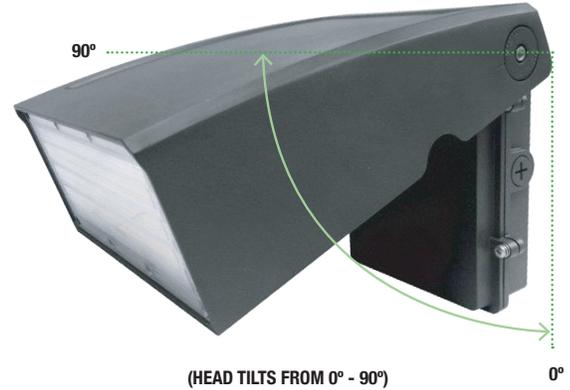

### FEATURES

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V/AC.
- Excellent optics design, greatly improve the light utilization and evenness.
- Cast Aluminum design, better cooling, light quality, LED Tj < 85°C.
- Photocell control available (Optional)
- 1-10V Dimming.

### PHOTOCELL (SOLD SEPARATE)



**JL-413C**  
Photoelectric Switch 120-277V


### ORDERING INFORMATION

EXAMPLE:


**SWP-02W27-50K-D-P**

PRODUCT	WATTAGE	VOLTAGE	CCT	FINISH	CONTROL
SWP Slim Adjustable Wall Pack	02W - (20W) 45W - (45W) 07W - (70W) 10W - (100W)	27 (AC120-277V)	40K - (4000K) 50K - (5000K)	D - (Dark Bronze) W - (White) B - (Black) S - (Silver)	P - (Photocell)


## DIMENSION

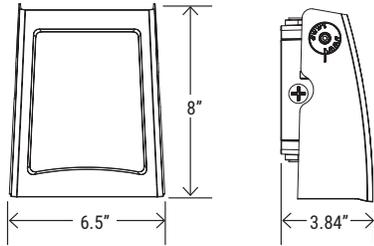

<b>WATTAGE</b>	WSD-SWP-02W27 WSD-SWP-45W27
<b>NT. WEIGHT</b>	2.9 lbs / 3.4 lbs
<b>BOX DIM.</b>	10" x 7.87" x 5.7"

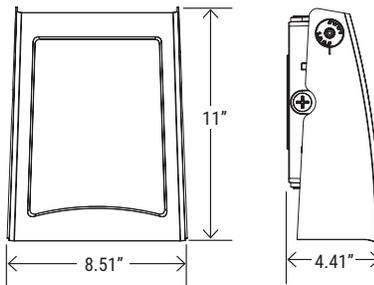

<b>WATTAGE</b>	WSD-SWP-07W27
<b>NT. WEIGHT</b>	5 lbs
<b>BOX DIM.</b>	12.9" x 10.23" x 5.9"

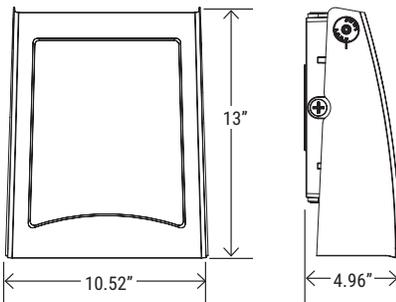

<b>WATTAGE</b>	WSD-SWP-10W27
<b>NT. WEIGHT</b>	7.3 lbs
<b>BOX DIM.</b>	14.9" x 11.8" x 7"

SPECIFICATION				
	SWP02W27-50K	SWP45W27-50K	SWP07W27-50K	SWP10W27-50K
<b>WATTAGE</b>	SWP02W27-50K	SWP45W27-50K	SWP07W27-50K	SWP10W27-50K
<b>LUMEN</b>	2720 lm	5895 lm	9170 lm	13100 lm
<b>EFFICACY</b>	136 lm/W	131 lm/W	131 lm/W	131 lm/W
<b>CCT</b>	4000K, 5000K			
<b>CRI</b>	70			
<b>INPUT VOLTAGE</b>	120-277V			
<b>POWER FACTOR</b>	0.98			
<b>DRIVER EFFICACY</b>	90%			
<b>DIMMING</b>	1-10V Dimming			
<b>LIGHT ANGLE</b>	92°	86°	87°	89°
<b>LIFE SPAN</b>	75,000 hrs			
<b>WORKING TEMPERATURE</b>	-22°F ~ 113°F			
<b>STORAGE TEMPERATURE</b>	-40°F ~ 176°F			
<b>OUTDOOR RATING</b>	IP65			
<b>CABLE</b>	Input Connect, No cable			
<b>WARRANTY</b>	5 year limited			