

Advantage Environmental Lighting


Catalog
Number

Project

Type

WV07L

Wall / Vanity Luminaire

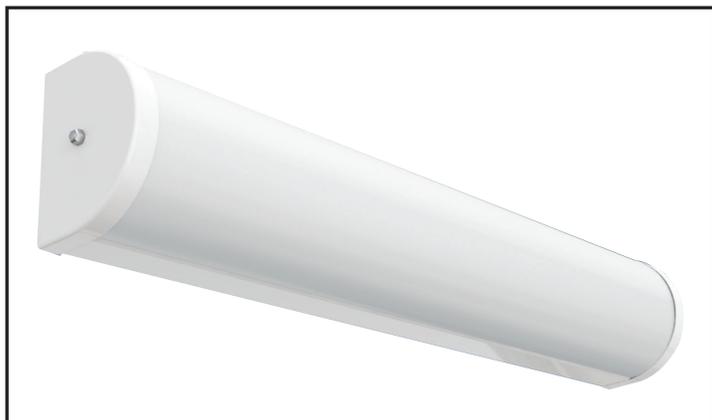

OPTIONAL



ORDERING INFORMATION

Example: WV07L-2-32-SW-W-DE-WT-15-30

PRODUCT SPECIFICATIONS

DESCRIPTION

The WV07L Series is a Wall/Vanity LED Luminaire with a smooth white acrylic diffuser. The WV07L is also available in 1 or 2 lamp configurations.

APPLICATIONS

The WV07L Series of LED Wall/Vanity fixtures are designed to be high quality, energy efficient LED fixtures for use in corridors, stairwells, bathrooms, etc.

CONSTRUCTION

The fixture is constructed of a structurally embossed, heavy gauge, cold rolled steel. White finish with powder coated white ends.

OPTICAL SYSTEM

White pre-painted polyester polymer finish with a high reflectivity

ELECTRICAL SYSTEM

Electronic drivers are available for 120/277V applications. Long-life LED system rated for >100K life hours (L70 @ 25°C). Metal gear tray for internal LED driver. Complies with federal energy efficiency standards.

MOUNTING

The WV07L Series is designed for surface mounting on either a wall or ceiling.

LISTINGS

ETL and cETL Listed. Damp location rated.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.


SERIES	NUMBER OF LAMPS	LAMP REPLACEMENT	DIFFUSER	COLOR	WIRE APPLICATION									
WV07L	1	1 Lamp	17	SW	Smooth White Acrylic	W	White	BLANK	Single Ended Wiring*					
	2	2 Lamps	28T8							28W T8	SP	Special	DE	Double Ended Wiring**
			28T5							28W T5				
			32							32W T8				
			54							54W T5HO				

LED	WT WATTAGE OPTIONS	WT COLOR TEMP	OPTIONS				
LED	LED Lamps	10W	10 Watt (available in 24" or 36")	30	3000K	12EBL	1200 Lumen Emergency Ballast
WT	With Tubes Included	12W	12 Watt (available in 48")	40	4000K	PC	Pull Chain
		15W	15 Watt (available in 36" or 48")	50	5000K	CO	Convenience Outlet
		18W	18 Watt (available in 48")			WVOC	Motion and Sound Sensor
		20W	20 Watt (available in 48")				



*Non-Shunted Sockets Wired at One End (Blank)

**Shunted Sockets Wired with White, Opposite End Wired with Black (DE)


FIXTURE DIMENSIONS

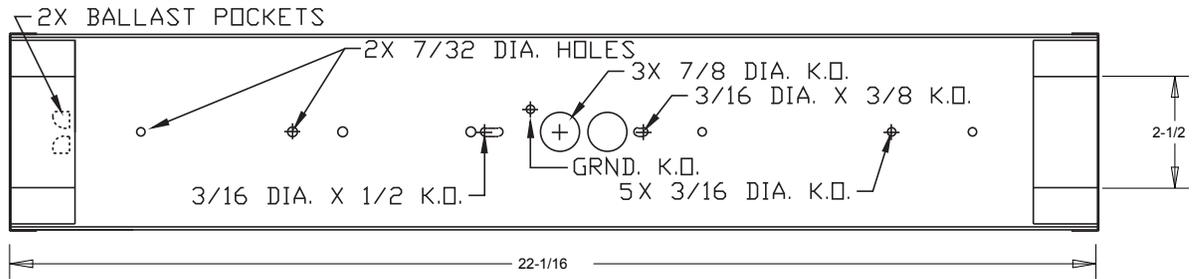

TOP

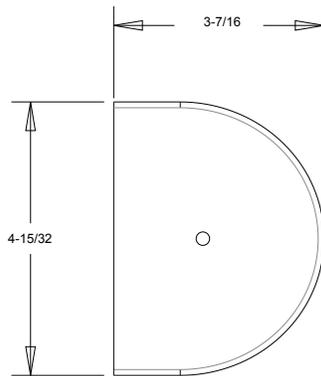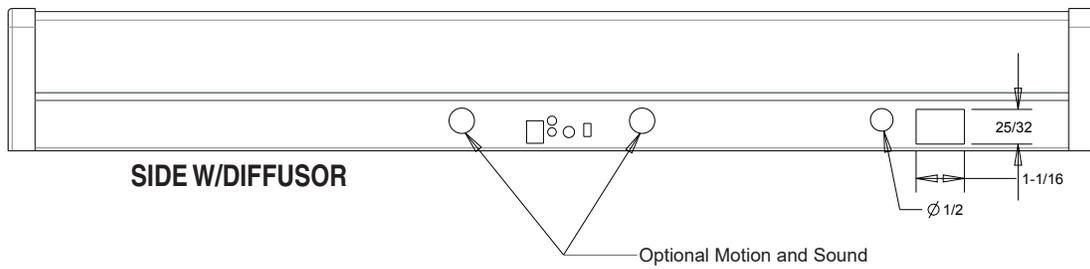

END

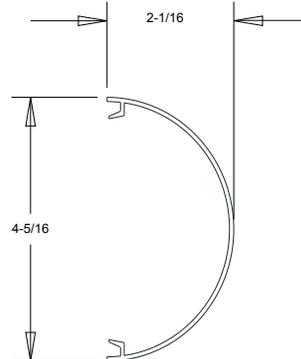

DIFFUSOR