

Advantage Environmental Lighting



| |
|----------------|
| Catalog Number |
| Project |
| Type |

WV35L

Wall / Vanity



STANDARD

OPTIONAL



PRODUCT SPECIFICATIONS

DESCRIPTION

The WV35L Series is a Wall/Vanity LED Luminaire with a smooth white acrylic diffuser. The WV35L is also available in 1 or 2 lamp configurations.

APPLICATIONS

The WV35L Series of LED Wall/Vanity fixtures are designed to be high quality, energy efficient LED fixtures for use in corridors, stairwells, bathrooms, etc.

CONSTRUCTION

The fixture is constructed of a structurally embossed, heavy gauge, cold rolled steel. White finish with powder coated white ends.

OPTICAL SYSTEM

White pre-painted polyester polymer finish with a high reflectivity

ELECTRICAL SYSTEM

Electronic drivers are available for 120/277V applications. Long-life LED system rated for >100K life hours (L70 @ 25°C). Metal gear tray for internal LED driver. Complies with federal energy efficiency standards.

MOUNTING

The WV35L Series is designed for surface mounting on either a wall or ceiling.

LISTINGS

UL and cUL Listed. Damp location rated.

WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at www.aelnow.com/warranty.

ORDERING INFORMATION

Example: WV35L-2-32-SW-W-DE-WT-15-35


| SERIES | NUMBER OF LAMPS | LAMP REPLACEMENT | DIFFUSER | COLOR | WIRE APPLICATION | | | | | |
|--------|-----------------|------------------|----------|----------|------------------|----------------------|----|---------|-------|-----------------------|
| WV35L | 1 | 1 Lamp | 17 | 17W T8 | SW | Smooth White Acrylic | W | White | BLANK | Single Ended Wiring* |
| | 2 | 2 Lamps | 28T8 | 28W T8 | CP | Clear Prismatic | SP | Special | DE | Double Ended Wiring** |
| | | | 28T5 | 28W T5 | | | | | | |
| | | | 32 | 32W T8 | | | | | | |
| | | | 54 | 54W T5HO | | | | | | |

| LED | WT WATTAGE OPTIONS | WT COLOR TEMP | OPTIONS | | | | |
|-----|---------------------|---------------|-----------------------------------|----|-------|-------|------------------------------|
| LED | LED Lamps | 10W | 10 Watt (available in 24" or 36") | 30 | 3000K | 12EBL | 1200 Lumen Emergency Ballast |
| WT | With Tubes Included | 12W | 12 Watt (available in 48") | 40 | 4000K | PC | Pull Chain |
| | | 15W | 15 Watt (available in 36" or 48") | 50 | 5000K | CO | Convenience Outlet |
| | | 18W | 18 Watt (available in 48") | | | TPS | Tamper Proof Screws |
| | | 20W | 20 Watt (available in 48") | | | | |


*Non-Shunted Sockets Wired at One End (Blank)

**Shunted Sockets Wired with White, Opposite End Wired with Black (DE)

FIXTURE DIMENSIONS

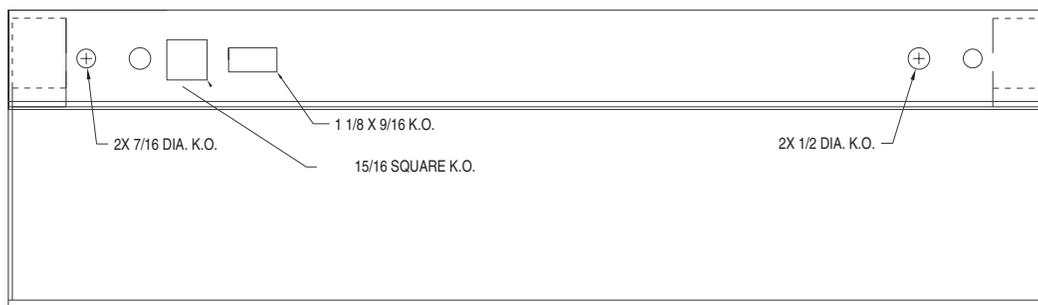

TOP - WITHOUT LENS

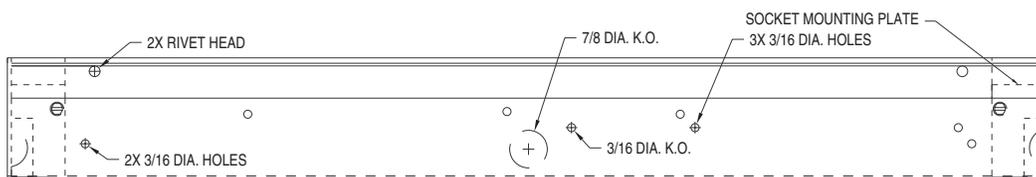

FRONT

