



**Advantage
Environmental
Lighting**

X15WLU

Compact Wet Location LED Exit Sign



STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

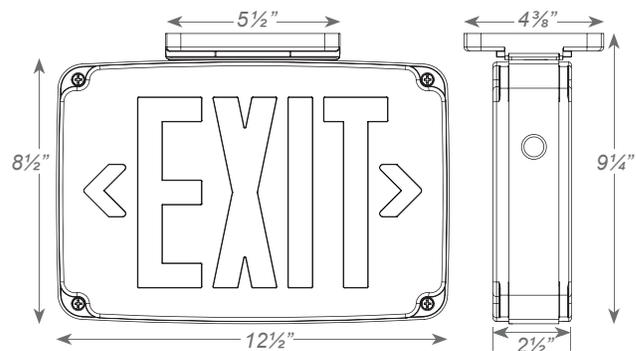

ORDERING INFORMATION

Sample Part Number: X15WLU-1-R-W-EM-CW

| MODEL | No. of FACES | LETTER COLOR | HOUSING COLOR | BATTERY | | OPTIONS | |
|-----------------|---------------|--------------|-----------------------------------|-------------------|----|---|-----------------------------------|
| X15WLU | 1 Single Face | R Red | W White (with white faceplate) | Blank AC Only | CW | Cold Weather ¹ (applies to the EM and SDT only) | SDT Self-diagnostics ¹ |
| Best # WLEZXTEU | 2 Double Face | G Green | B Black (with black faceplate) | EM Battery Backup | | | TP Tamper-Proof |
| | | | G Gray (with white faceplate) | | | | 2C Dual circuit ² |
| | | | | | | | CUSTOM Custom Wording |

Special voltage & SALIDA face plate options available. Check with your AEL Representative.

¹ Available in EM units only.

² Available in AC units only.

T (817) 468-3591

E info@aelnow.com

www.aelnow.com

Specifications subject to change without notice.



Advantage Environmental Lighting

X15WLU

Compact Wet Location LED Exit Sign

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | INPUT AMPS (A) | |
|-------------------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| X15WLU-RED/GREEN | 2.7 | 2.7 | 0.025 | 0.011 |
| X15WLU-RED/GREEN/EM/SDT | 3.3 | 3.4 | 0.030 | 0.014 |
| X15WLU-RED/GREEN-2C | 2.4 | 2.4 | 0.023 | 0.011 |

MAY 23, 2018